



Flush Well

INSTALLATION GUIDE



HANDMADE
IN U.S.A.



WEAR GLOVES
DURING INSTALL

FRAGILE FINISHES

DANGER: ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.



+1 212 334 7333

www.alliedmaker.com • sales@alliedmaker.com



1




2x Machined Screws




Lens

Inspect Contents

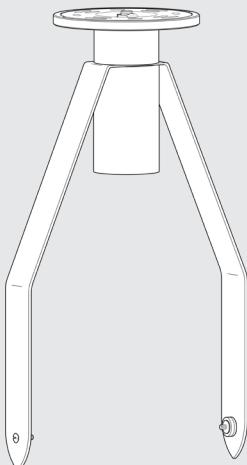

Fixture

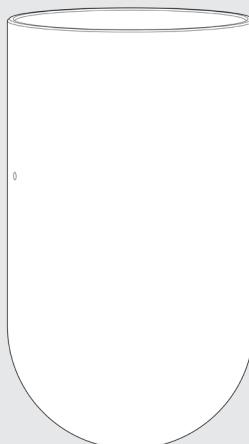

Glass



Light Bulb




Fixture Socket




Set Screw




1/16 Hex Screwdriver

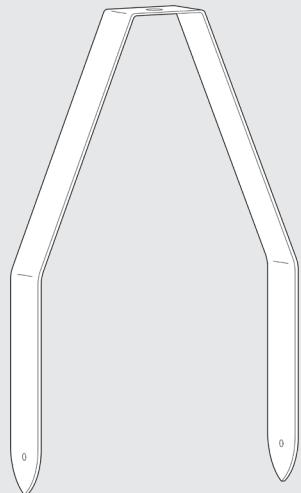Terminology


Leather Strap



Canopy


Phillips Screwdriver
(Not Included)Flathead Screwdriver
(Not Included)

Universal Backplate

2x Reducer
&
2x Reducer ScrewJunction Box
(Not Included)

3



Using a hex screwdriver,
loosen the set screw on the
fixture canopy and remove
the universal backplate.

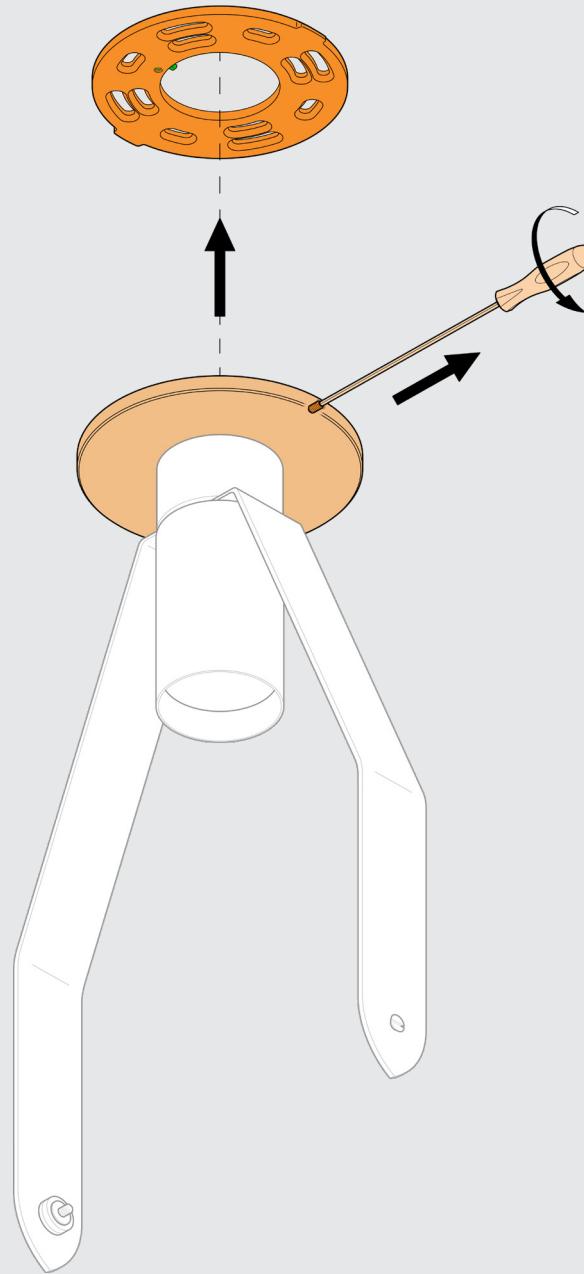

4


Mount the universal backplate onto the junction box using the provided machine screws.

NOTE: Make sure the two tabs on the universal backplate are rotated to a minimum of 10° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the backplate and universal backplate into place.

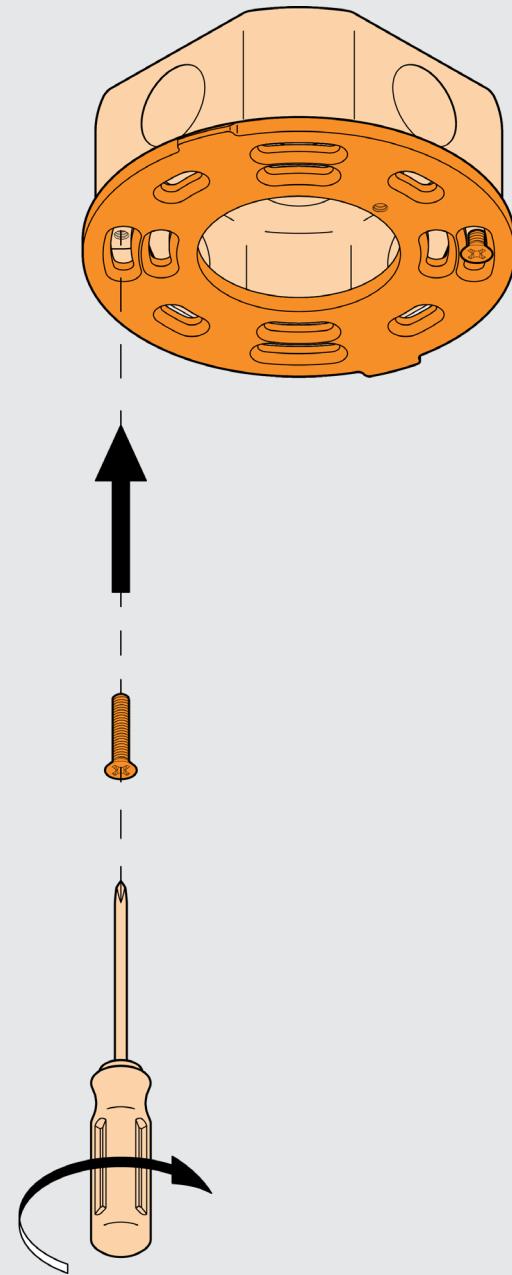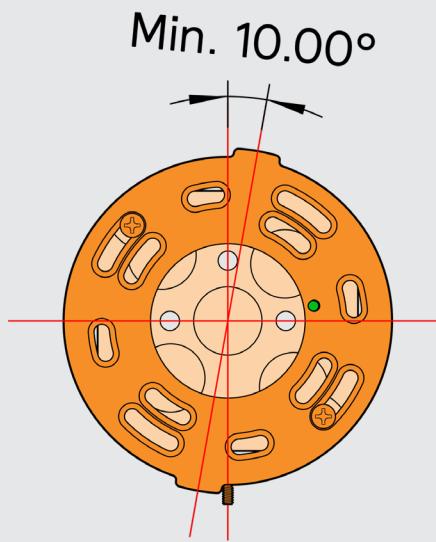


5

Using a flat head screwdriver, unscrew the reducer screws from the reducers attached to the leather strap.

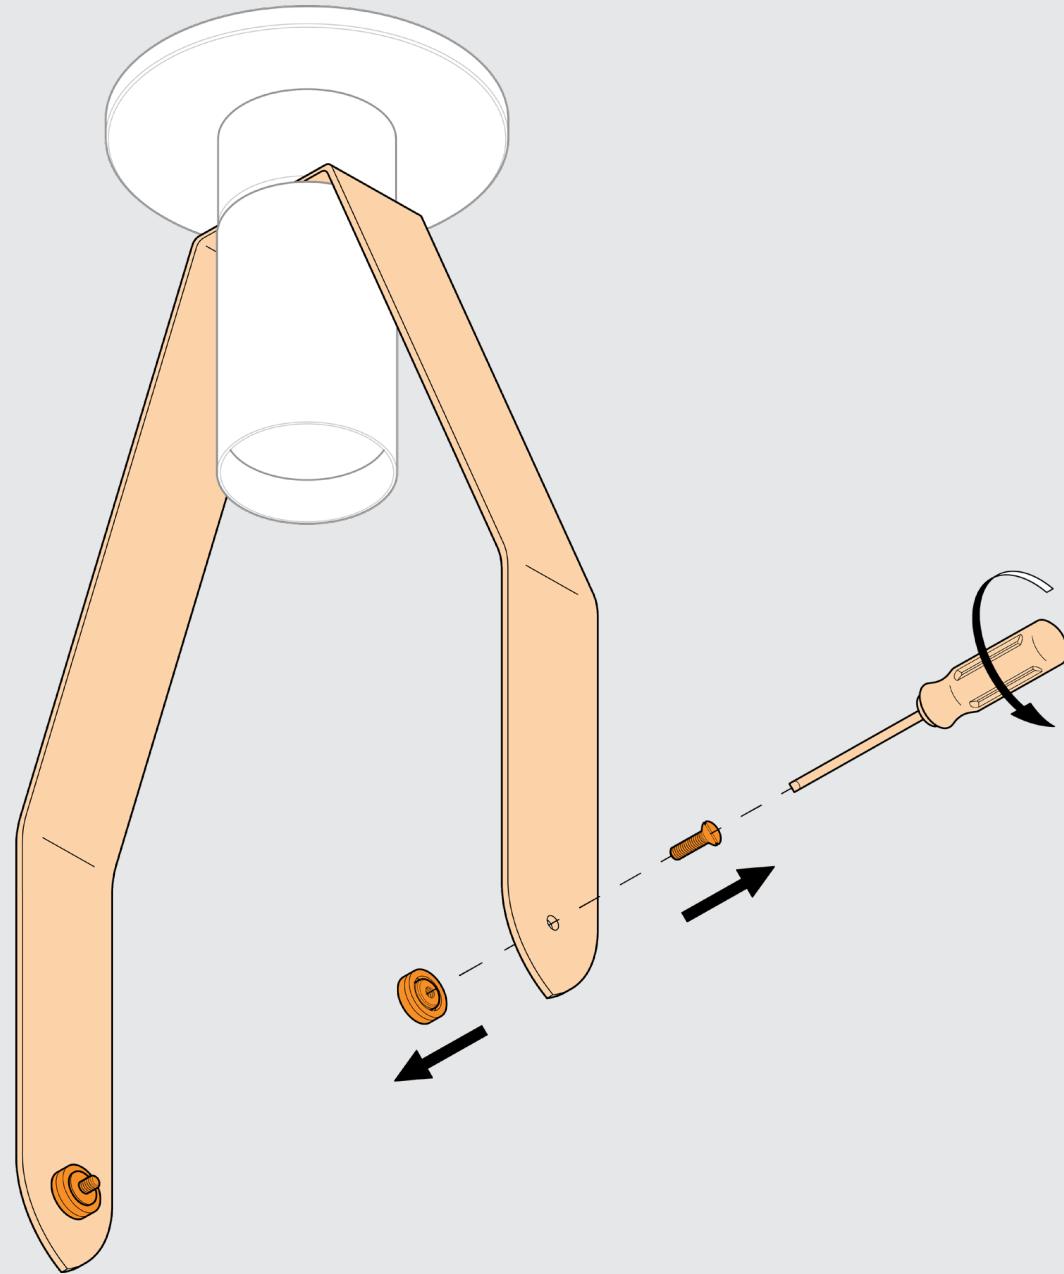


6

Connect the ground wire from the universal backplate to the ground wire from the junction box. Then, connect the wires from the fixture to the wires from the junction box using wire nuts.

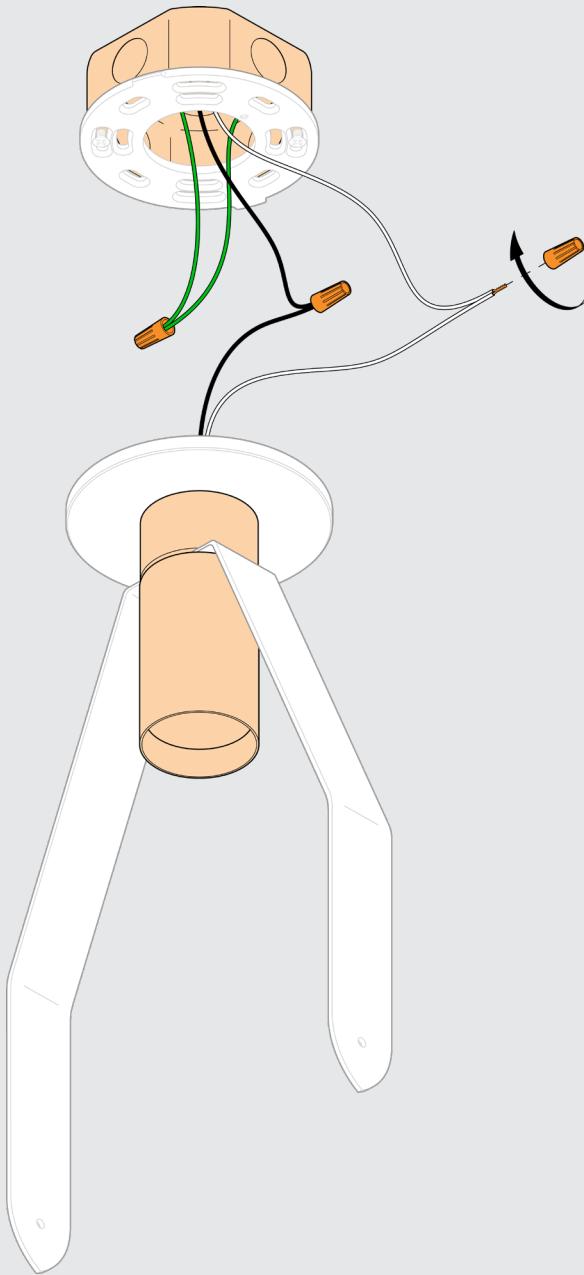


7

Align the tabs on the universal backplate with the tab openings on the fixture canopy. Then, place the fixture canopy over the universal backplate and rotate the fixture to the desired position.

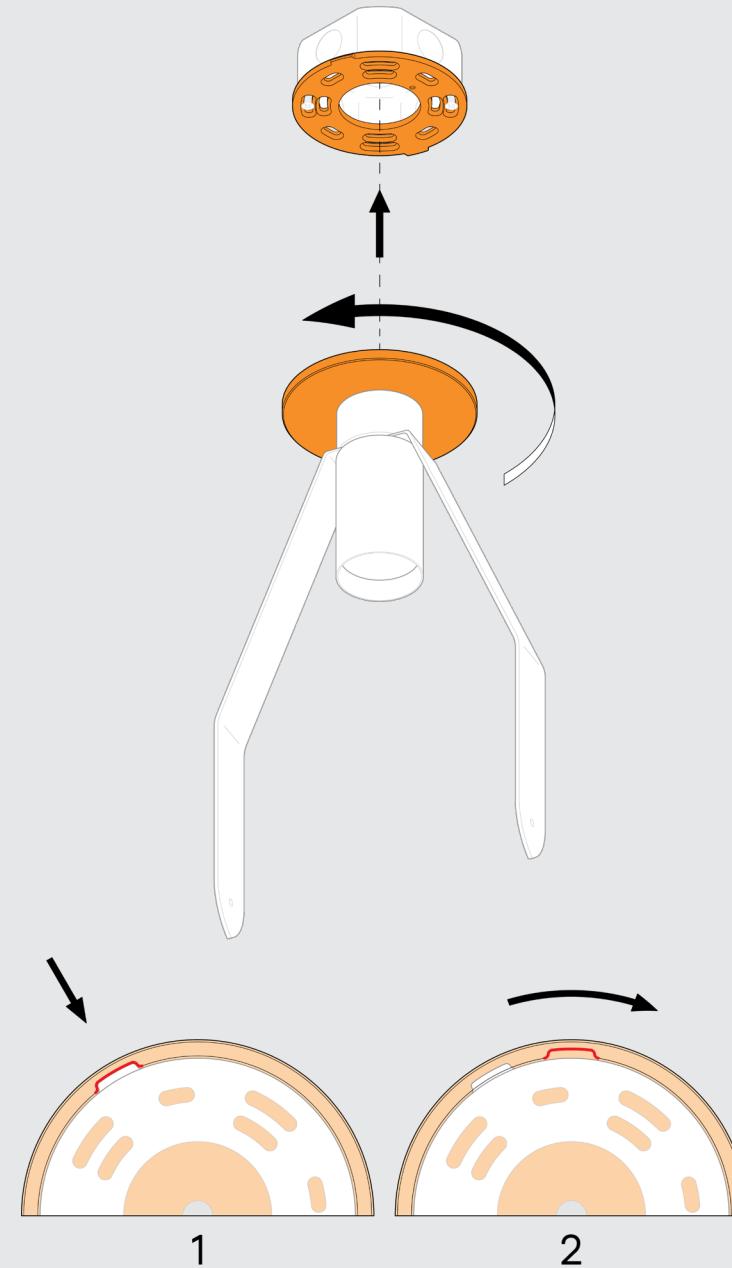


8

Using a hex screwdriver,
tighten the set screw on the
fixture canopy to secure the
fixture into place.

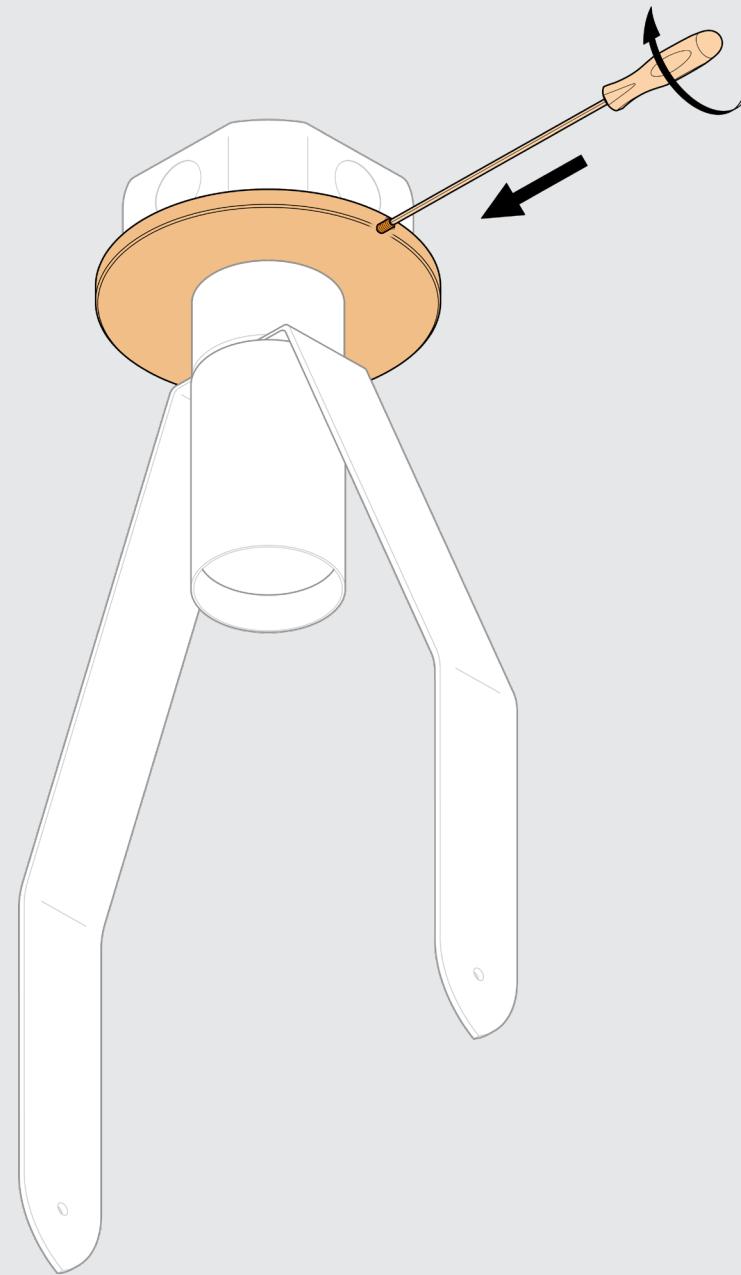

9

Using a flat head screwdriver,
screw the reducer screws
through the glass side holes
and into the reducers to secure
the glass to the leather strap.

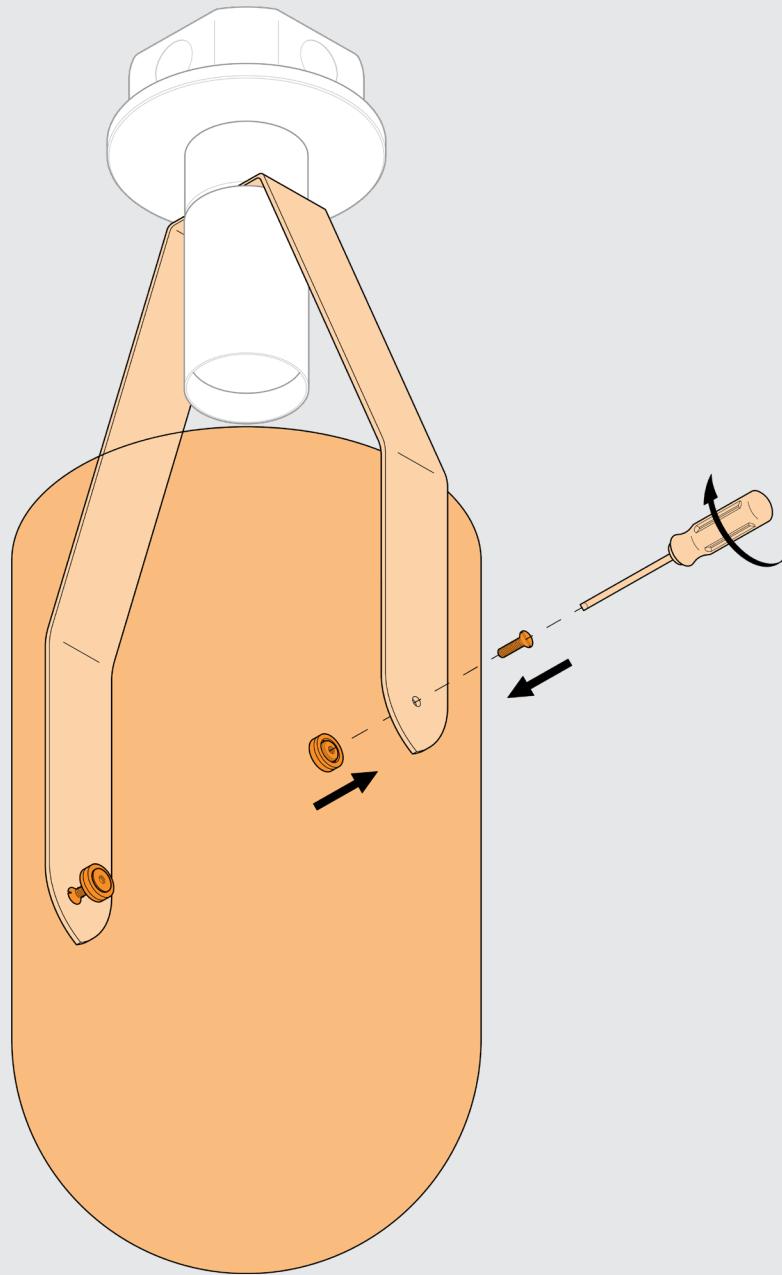

10

Place the lens on top of the glass.
Adjust alignment to be centered.

