Summit Sconce

INSTALLATION GUIDE

HANDMADE
IN U.S.A.

WEAR GLOVES
DURING INSTALL

FRAGILE FINISHES

DANGER: ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.

+1 212 334 7333

www.alliedmaker.com • sales@alliedmaker.com

1

Inspect Contents

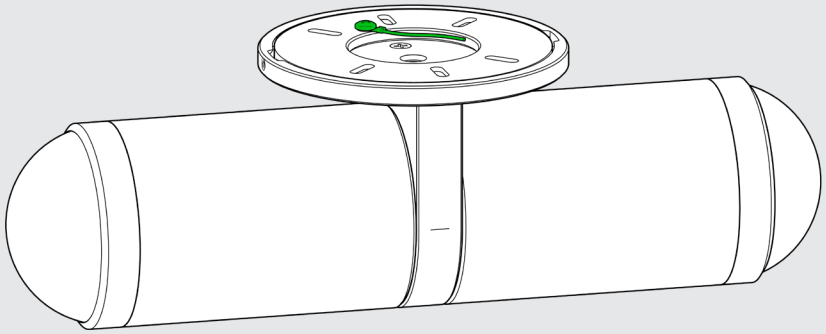

Fixture



2x Machine Screws

Terminology



Universal Backplate

1/16 Hex Screwdriver

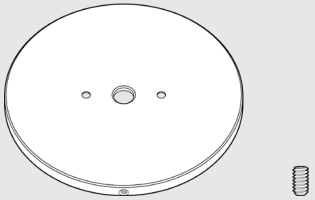

Canopy
&
Set Screw



Phillips Screwdriver
(Not Included)



Junction Box
(Not Included)

3

Preparation

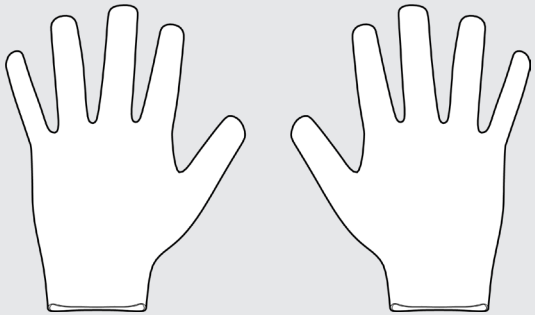

Nitrile Gloves

4

Using the hex screwdriver, loosen the set screw on the fixture canopy and remove the universal backplate.

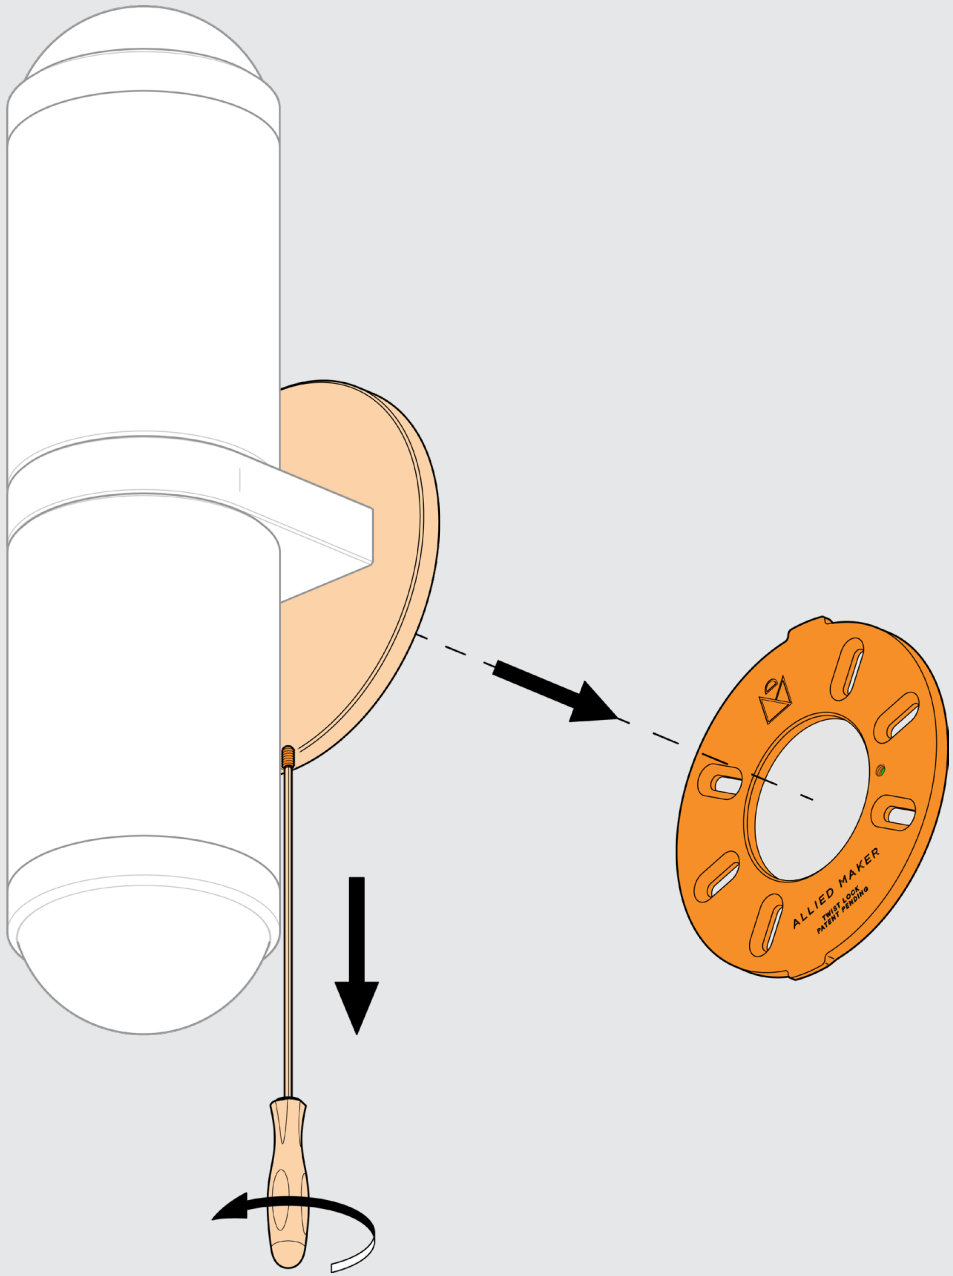

5

Mount the universal backplate onto the junction box using the provided machine screws.

NOTE: Make sure the two tabs on the universal backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and universal backplate into place.

CAUTION: Do not overtighten the machine screws. Overtightening will prevent the two tabs on the universal backplate from engaging with the channel inside the canopy.

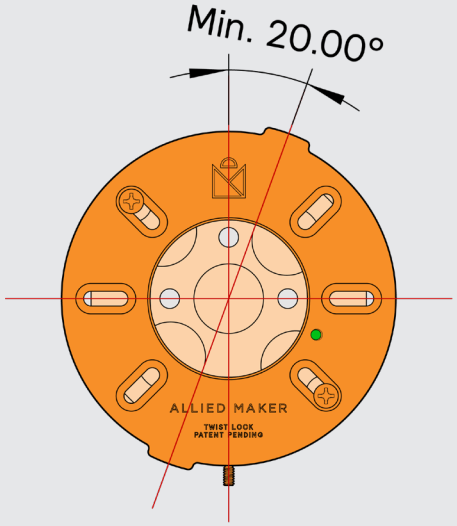

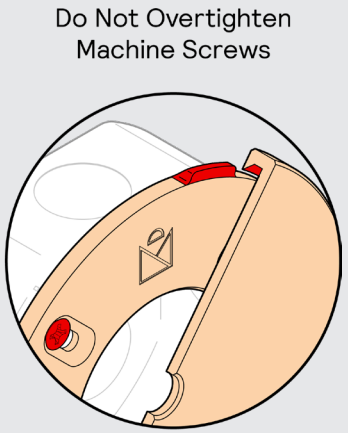

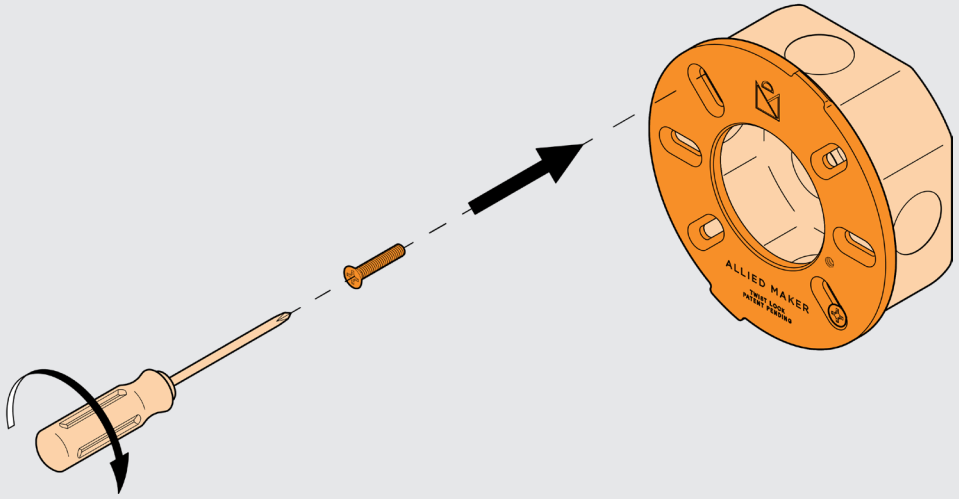

6

Connect the ground wire from the universal backplate with the ground wire from the junction box using a wire nut. Then, connect the wires from the fixture to the wires from the junction box using wire nuts.

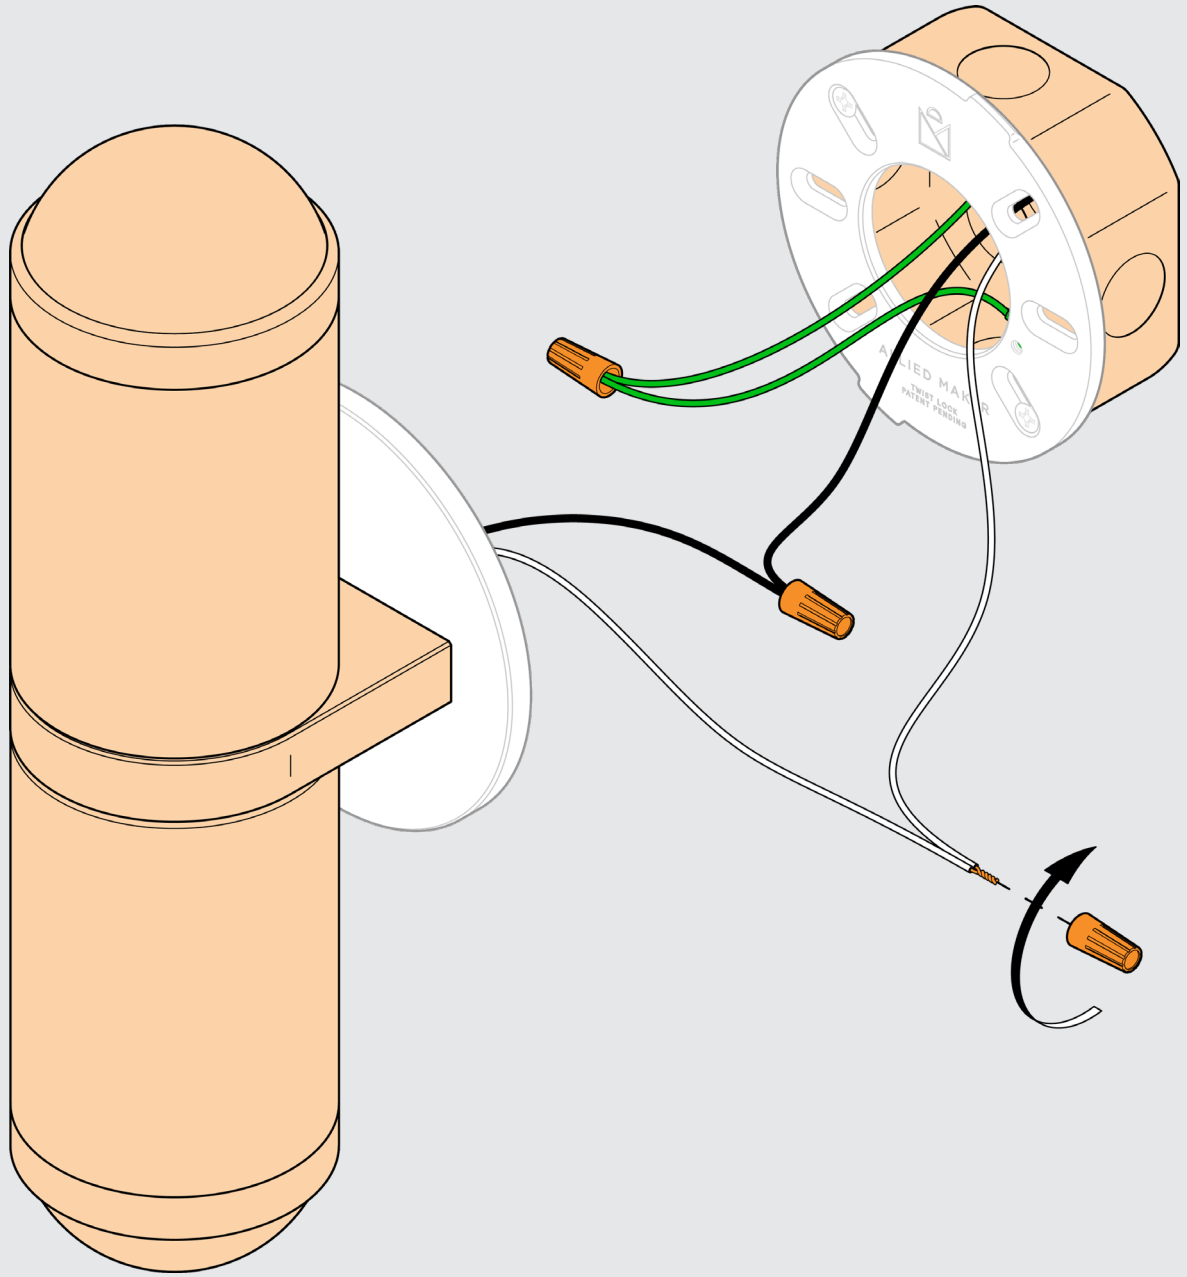

7

Align the tabs on the universal backplate with the tab openings on the fixture canopy. Then, place the fixture canopy over the universal backplate and rotate the fixture to the desired position.

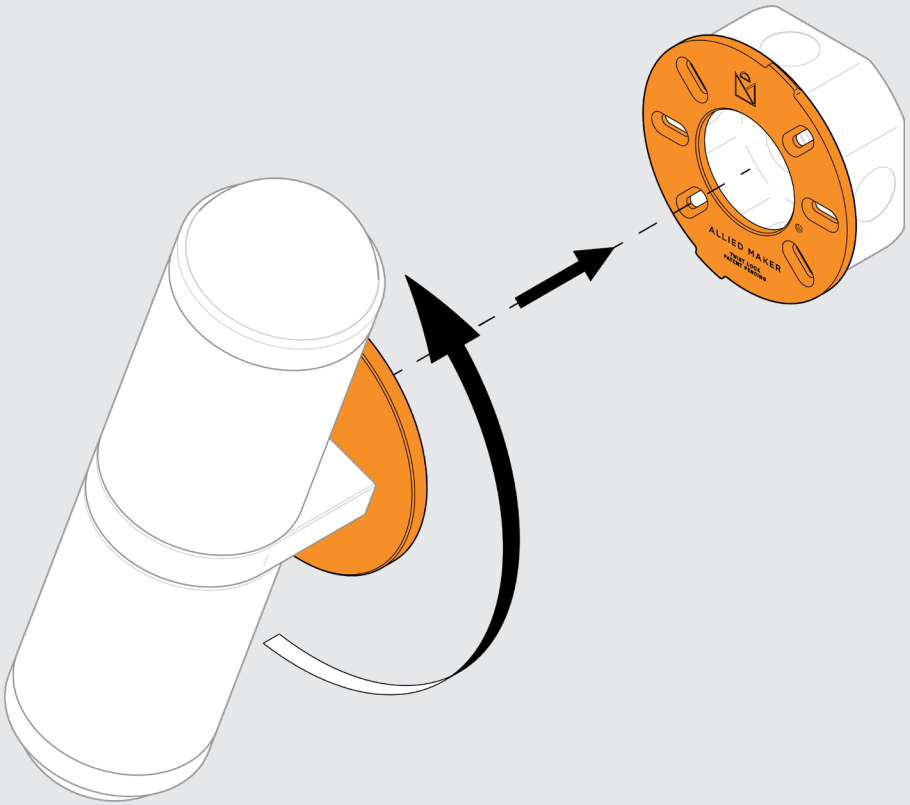

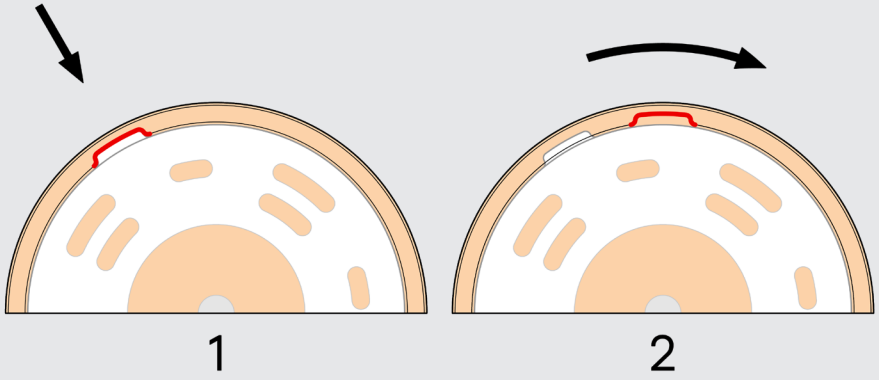

8

Using the hex screwdriver, tighten the set screw on the fixture canopy to secure the canopy into place.

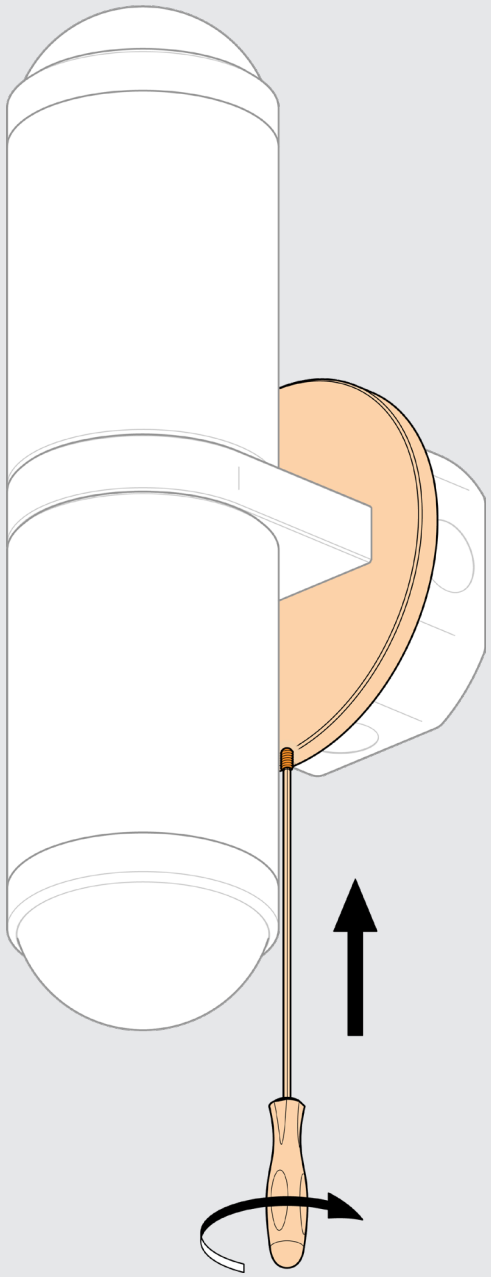

Summit Sconce

BULB REPLACEMENT

INSTALLATION GUIDE

HANDMADE
IN U.S.A.

WEAR GLOVES
DURING INSTALL

FRAGILE FINISHES

DANGER: ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.

+1 212 334 7333

www.alliedmaker.com • sales@alliedmaker.com

1

Inspect Contents

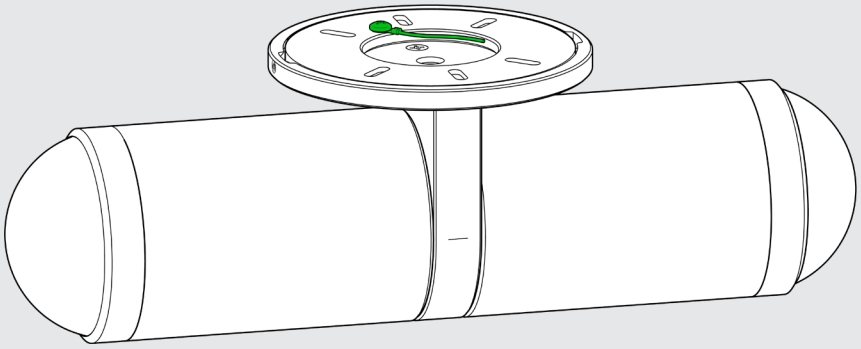

Fixture



Replacement
Light Bulb

Terminology

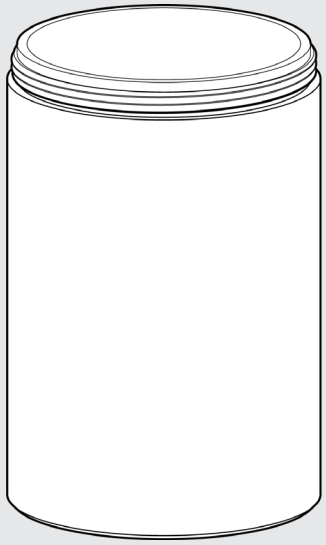

2x Socket Body

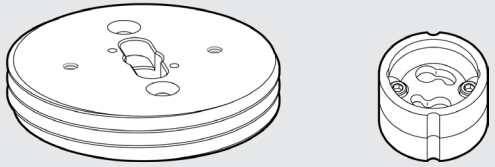

2x Adapter
&
2x Light Socket

3

Preparation

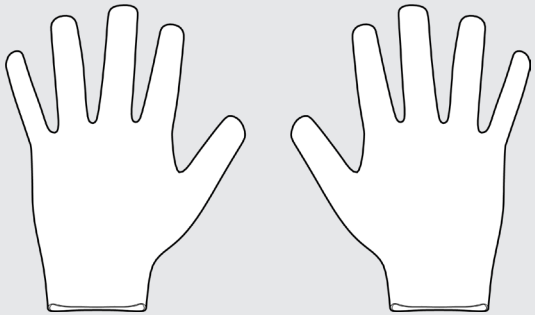

Nitrile Gloves

4

Unscrew and remove the socket bodies from the adapters.

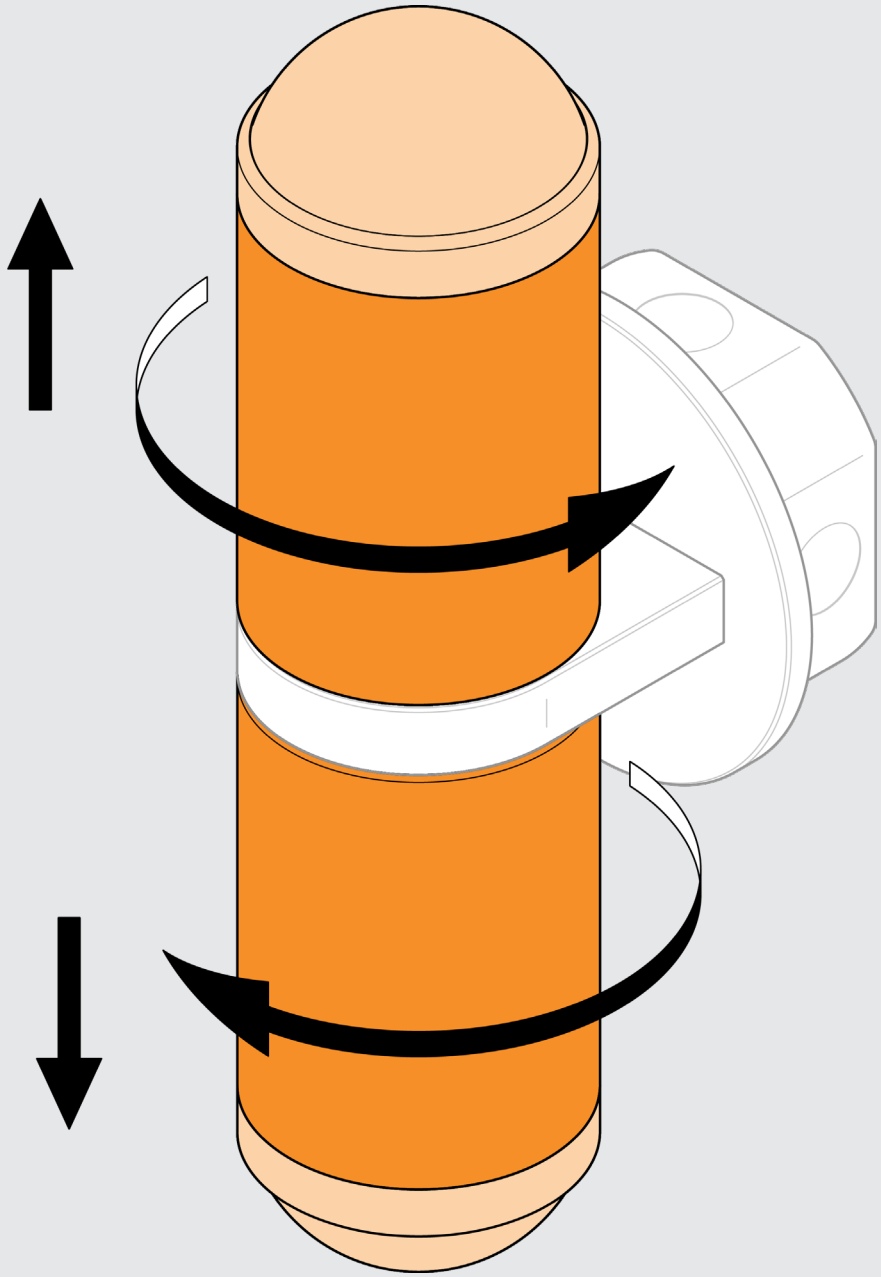

5

Unscrew and remove the light bulbs from the light sockets.

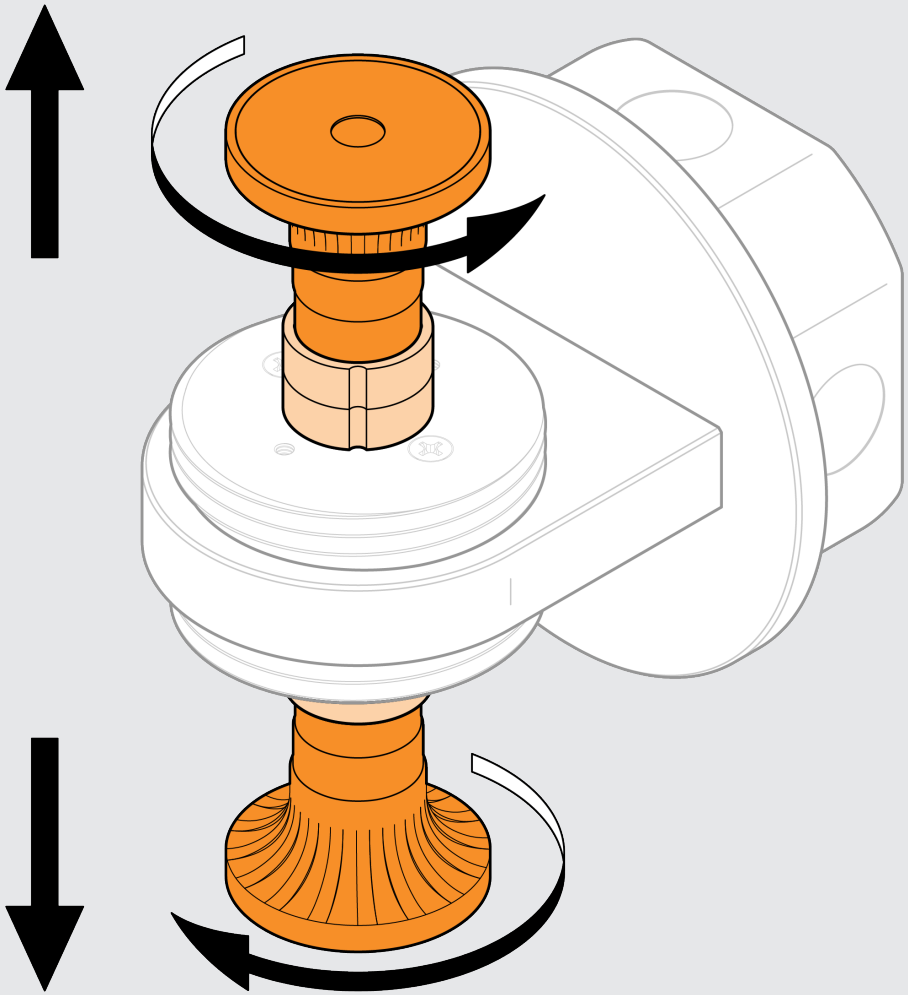

6

Insert the replacement light bulbs into the light sockets.

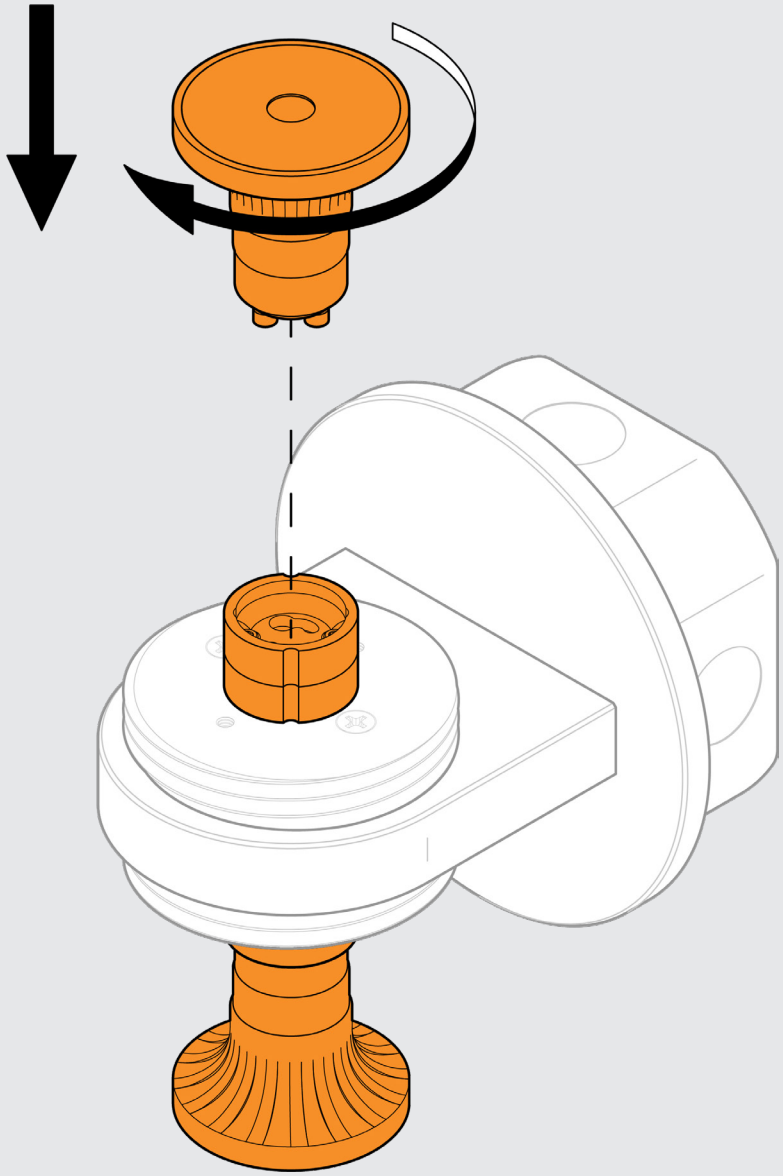

7
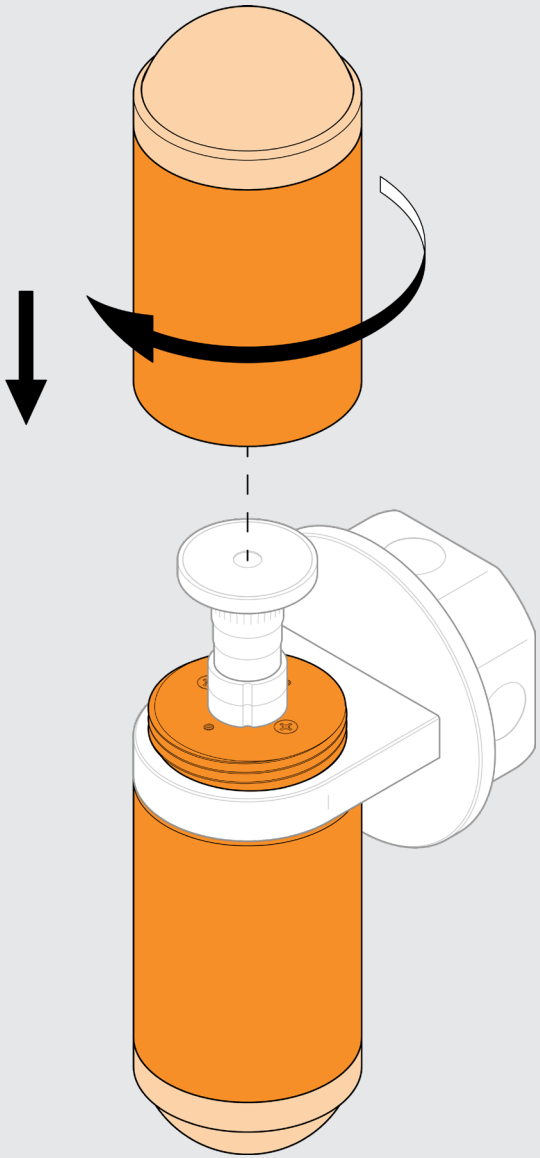
Screw the socket bodies back onto the adapters to secure the fixture into place.