ALLIED MAKER

MADE IN NEW YORK

Beacon 17” Pendant

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included

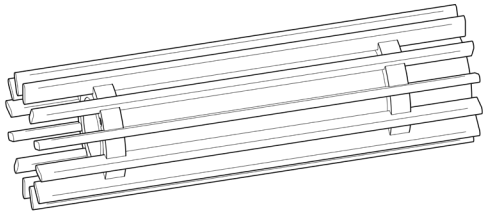 Shade	Canopy	Light Bulb	 2x Phillips Screw
	Hang Tube	 Socket Assembly	1/16 Hex Driver

1

Using the **hex driver** (1)
loosen the **set screw** (2)
inside the **socket cap** (3)

Travel the wires from the **socket cap** (3)
through the **hang tube** (4)

Screw the **hang tube** (4)
onto the **socket cap** (3)

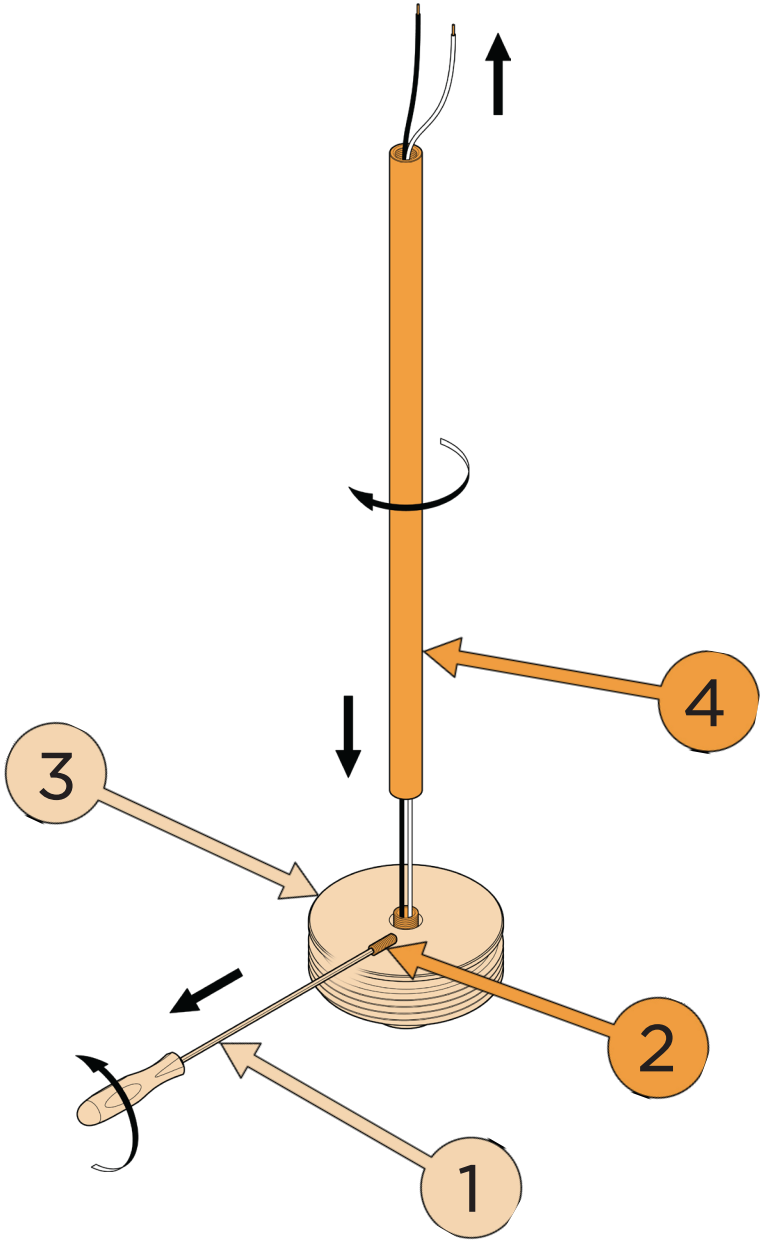

2

Using the **hex driver** (1)
tighten the **set screw** (2)
inside the **socket cap** (3)
to secure the **hang tube** (4) into place.

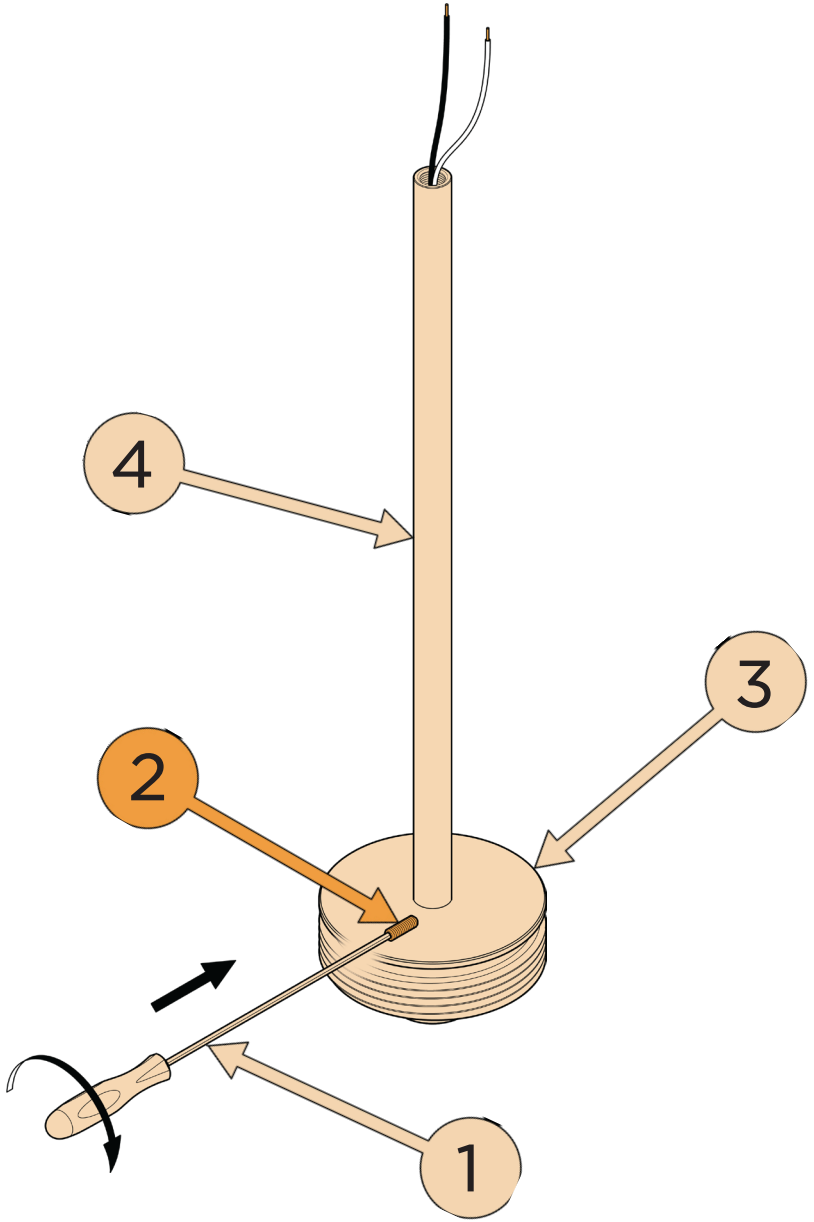

3

Travel the wires
through the **hang straight** (1)

Screw the **hang straight** (1)
onto the **hang tube** (2)

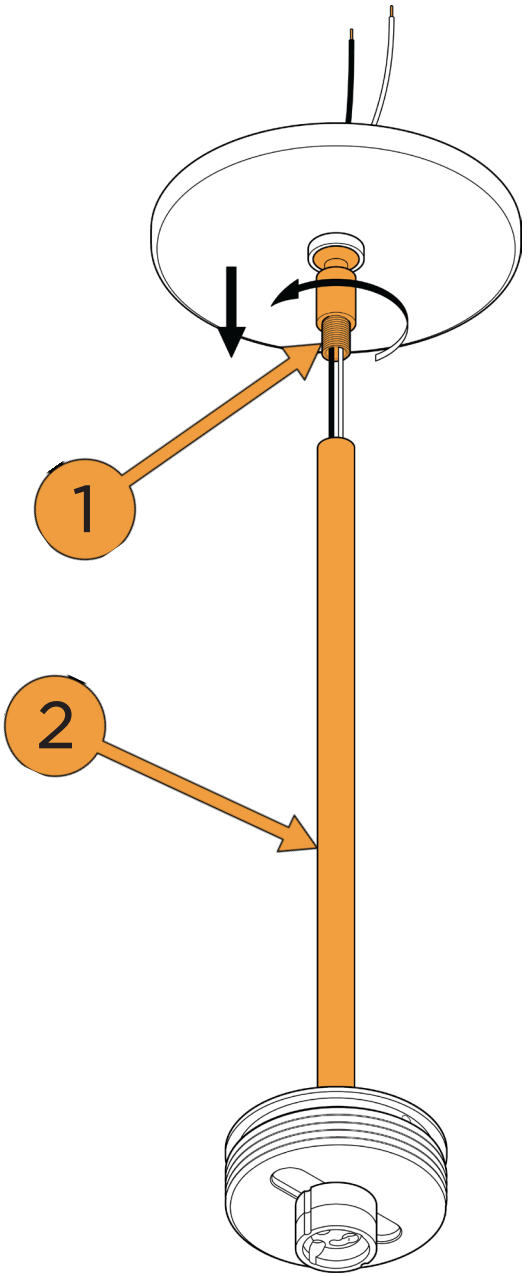

4

Remove the **knurled ring** (1)
from the **hang straight** (2)

Carry the **knurled ring** (1) and the
canopy (3) down the **hang tube** (4)

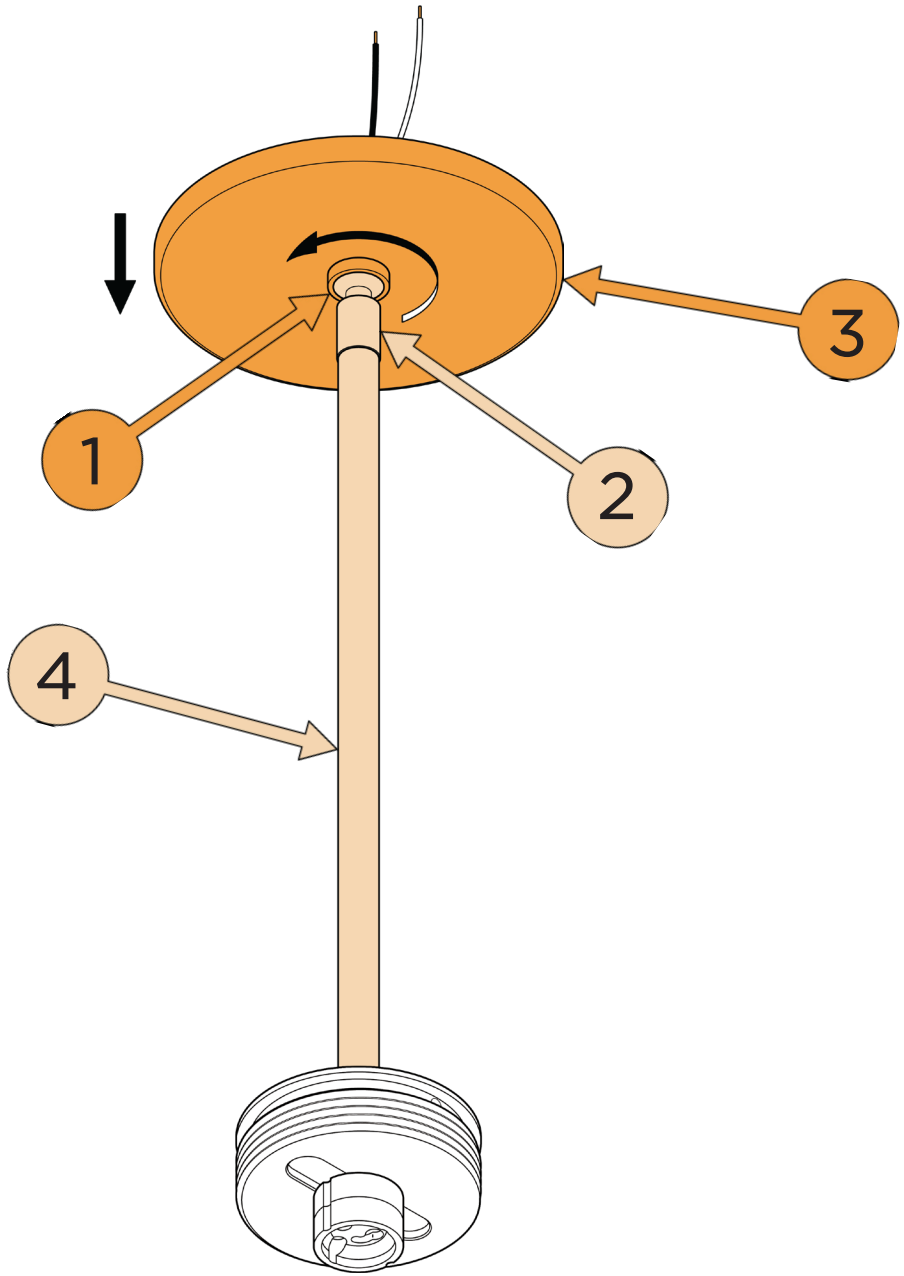

5

Mount the **backplate** (1)
onto the **junction box** (2)
using the provided the **phillips screws** (3)

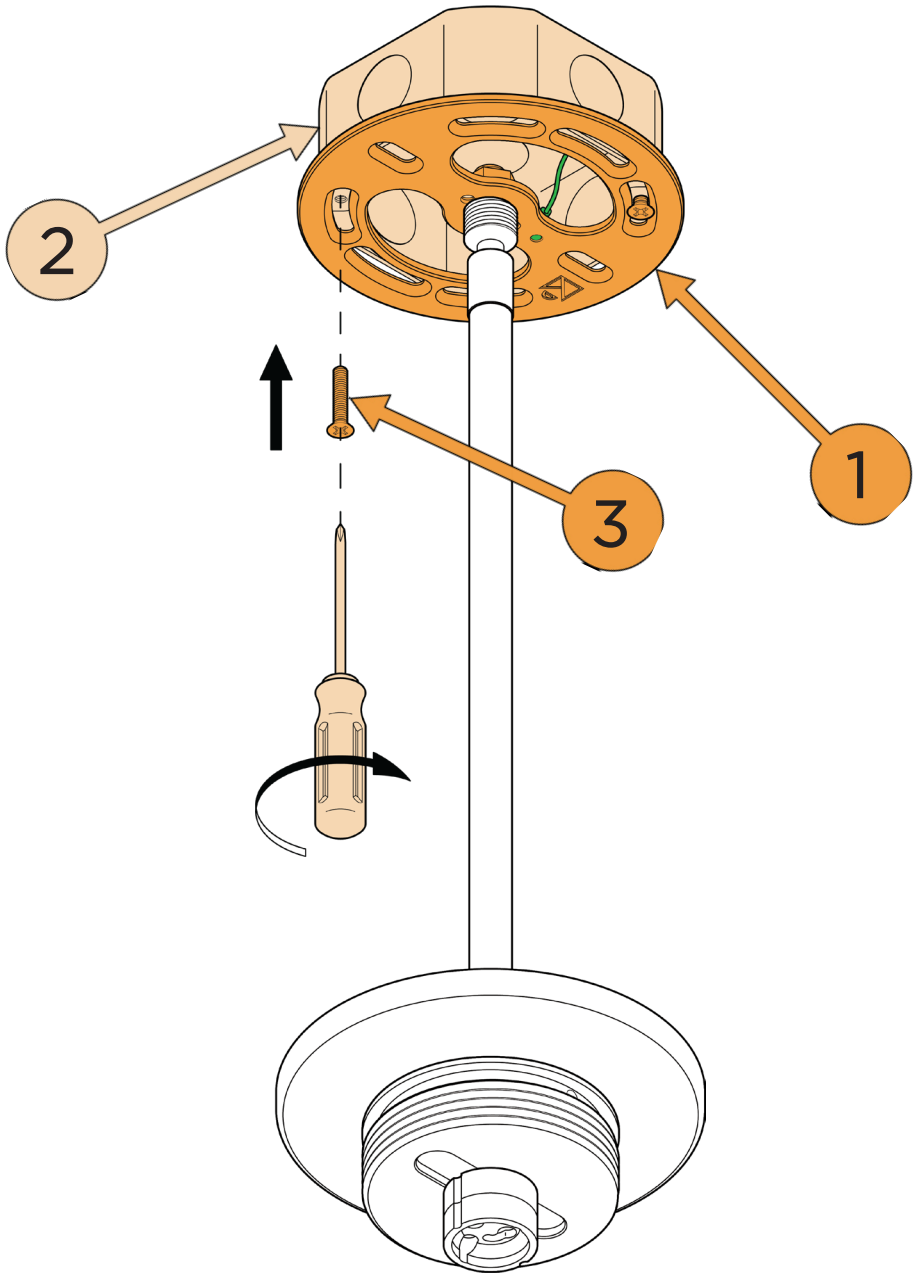

6

Connect the wires from the **socket assembly** (1) with the wires from the **junction box** (2) using **wire nuts** (3)

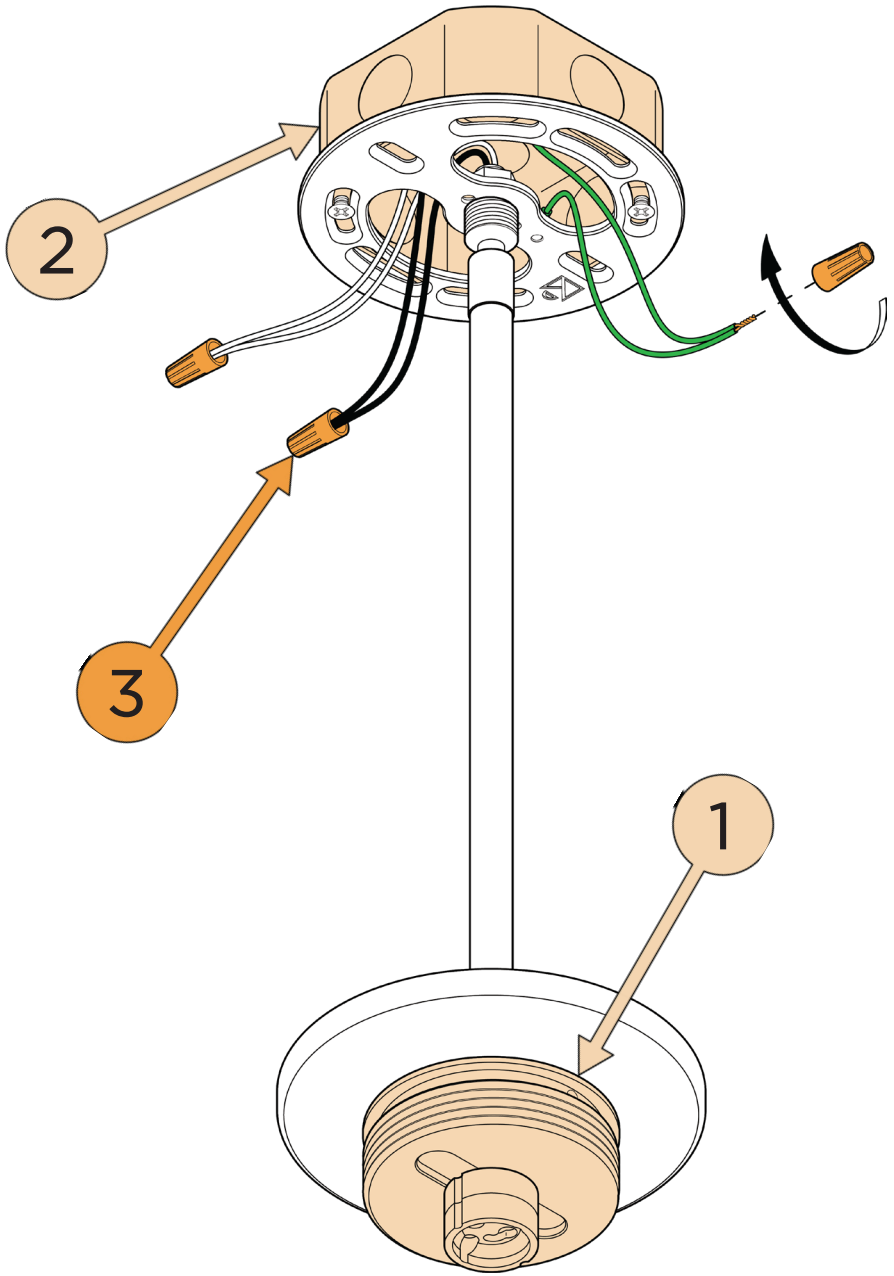

7

Carry the **canopy** (1)
up the **hang tube** (2)
and over the **hang straight** (3)
and hold in place.

Carry the **knurled ring** (4) up and
screw onto the **hang straight** (3)
to secure the **canopy** (1) into place.

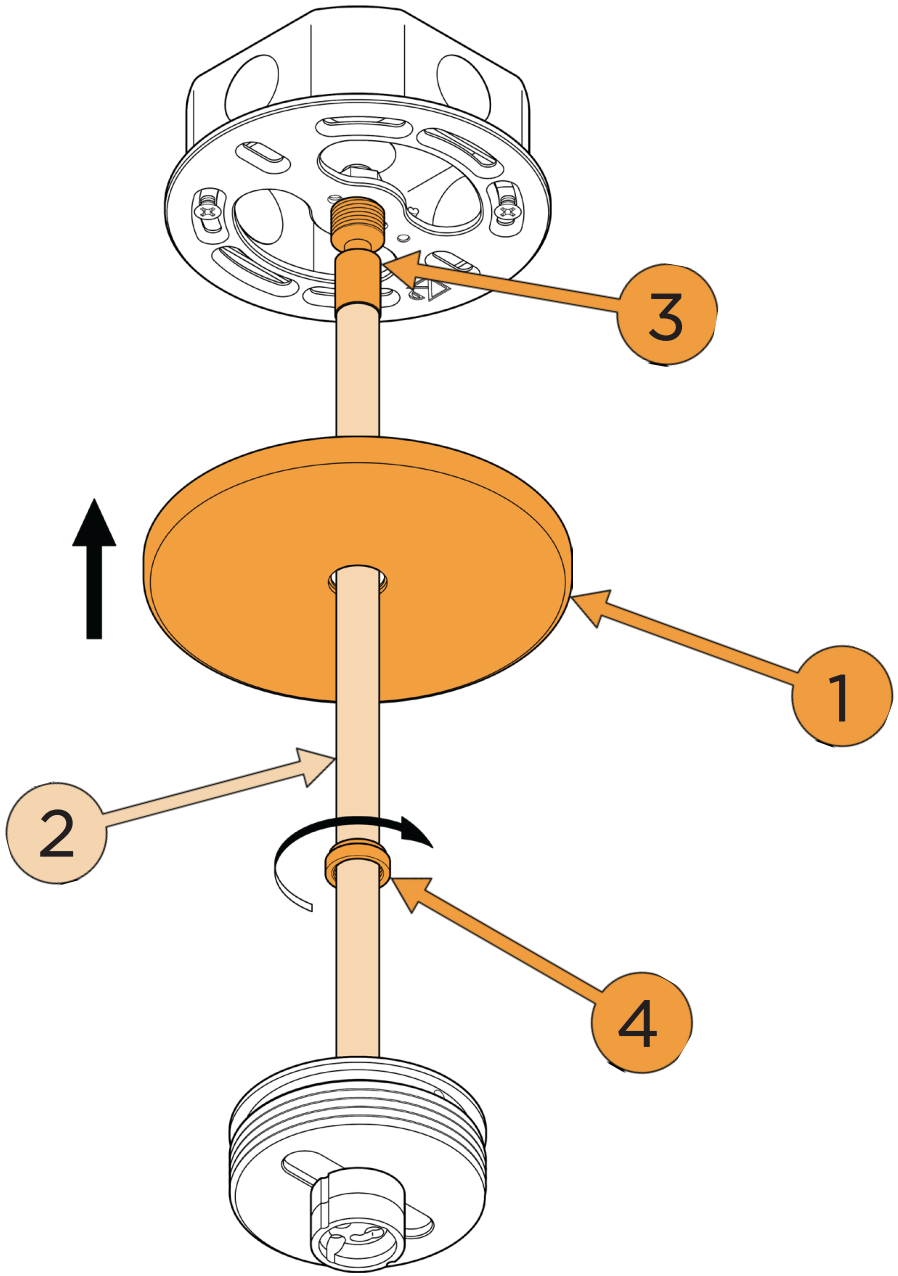

8

Insert the **light bulb** (1)
into the **fixture socket** (2)

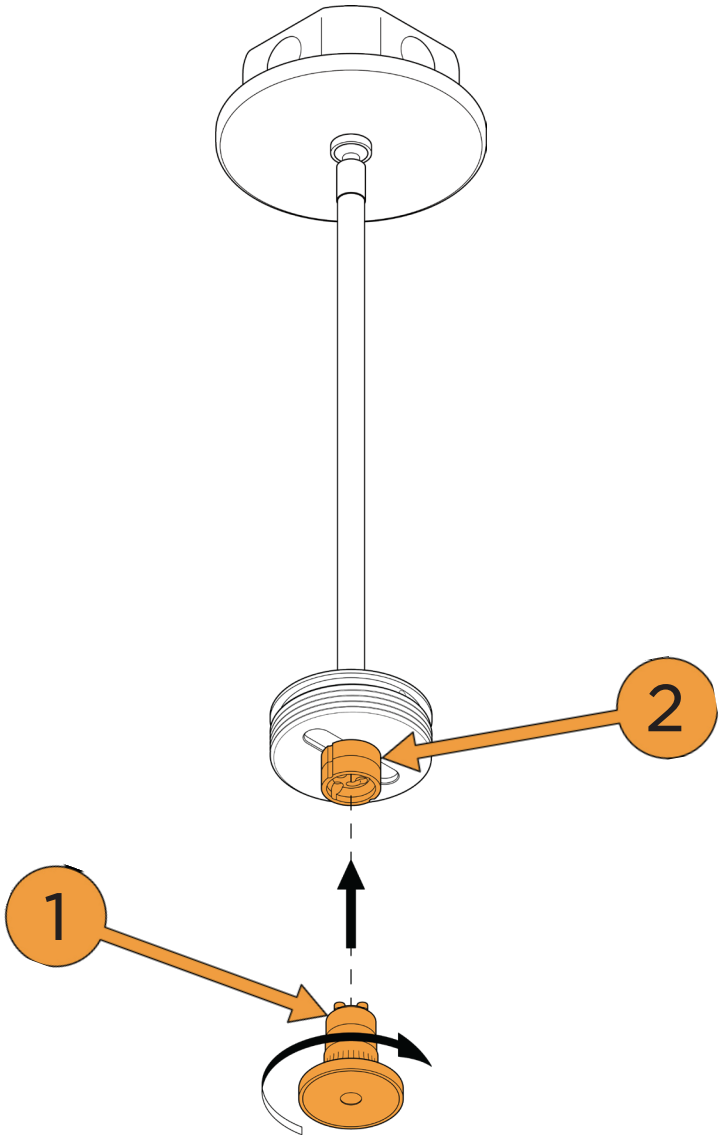

9
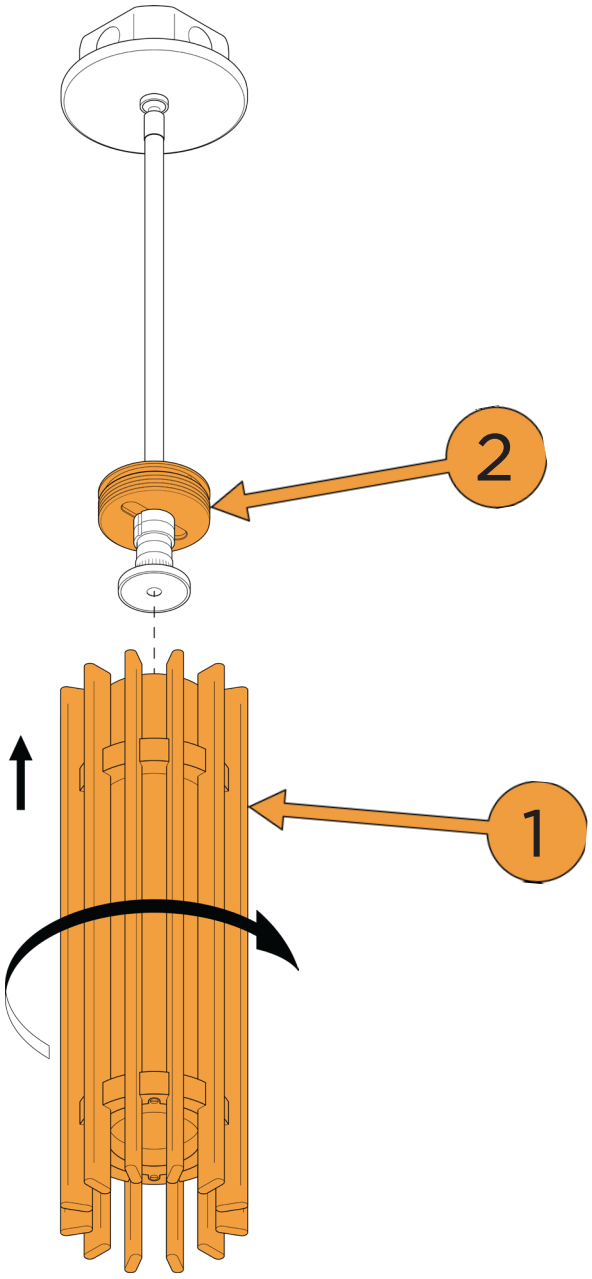
Screw the **shade** (1)
onto the **socket cap** (2)