ALLIED MAKER

MADE IN NEW YORK

# Slim Aperture Slumped Glass 16”

Installation Guide

212-334-7333

help@alliedmaker.com

**LIVING FINISHES**

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

# Contents Included

| | | |
|---|---|---|
|  Lighting Fixture | 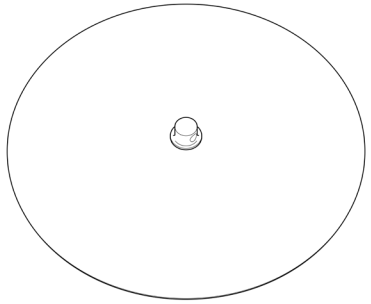 Shade |  Countersunk Screw |

| | | | |
|---|---|---|---|
| Light Bulb |  2x Phillips Screw | 1/16 Hex Driver | 1/8 Hex Driver |

# 1

Using the **1/16 hex driver** (1)
loosen the **set screw** (2)
in the **canopy** (3)

Remove the **backplate** (4)

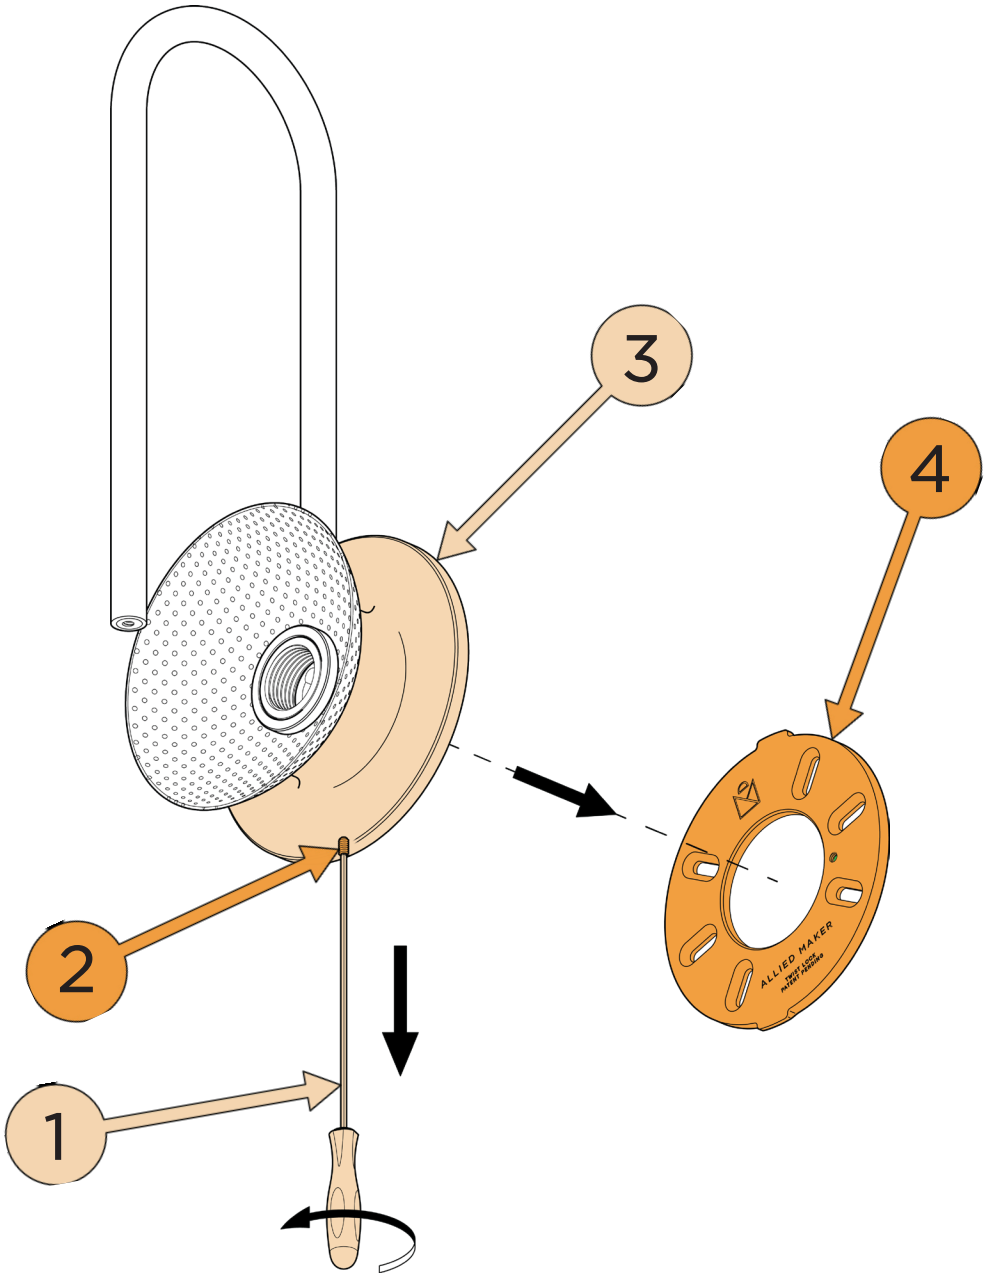

# 2

Mount the **backplate** (1) onto the **junction box** (2) using the provided **phillips screws** (3)

**NOTE:** Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

**CAUTION:** Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

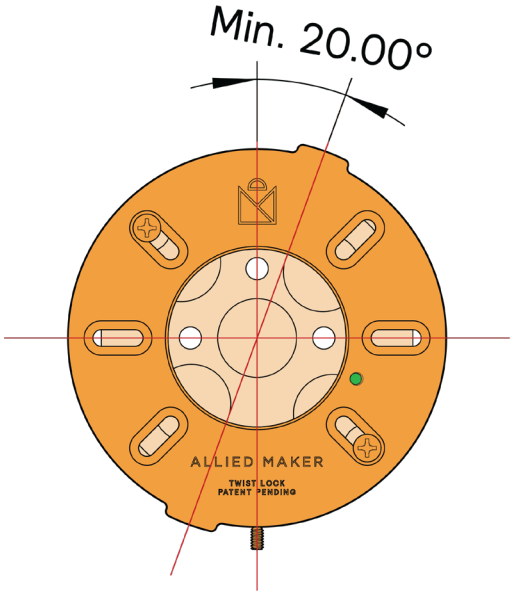


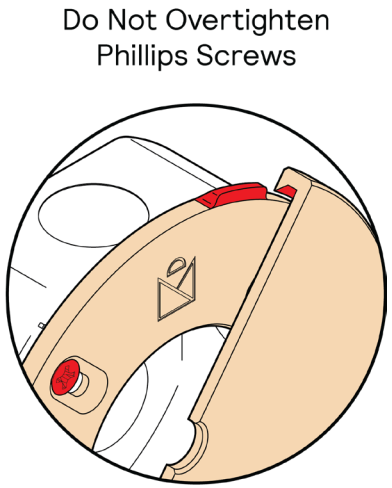


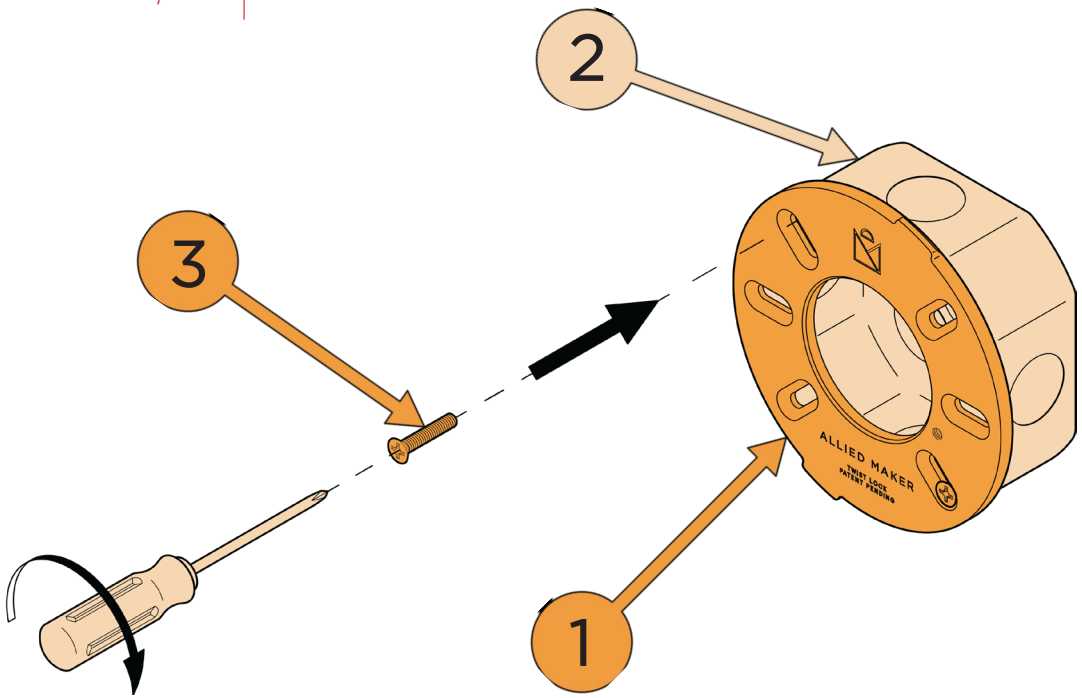

# 3

Connect the wires from the **lighting fixture** (1) with the wires from the **junction box** (2) using **wire nuts** (3)

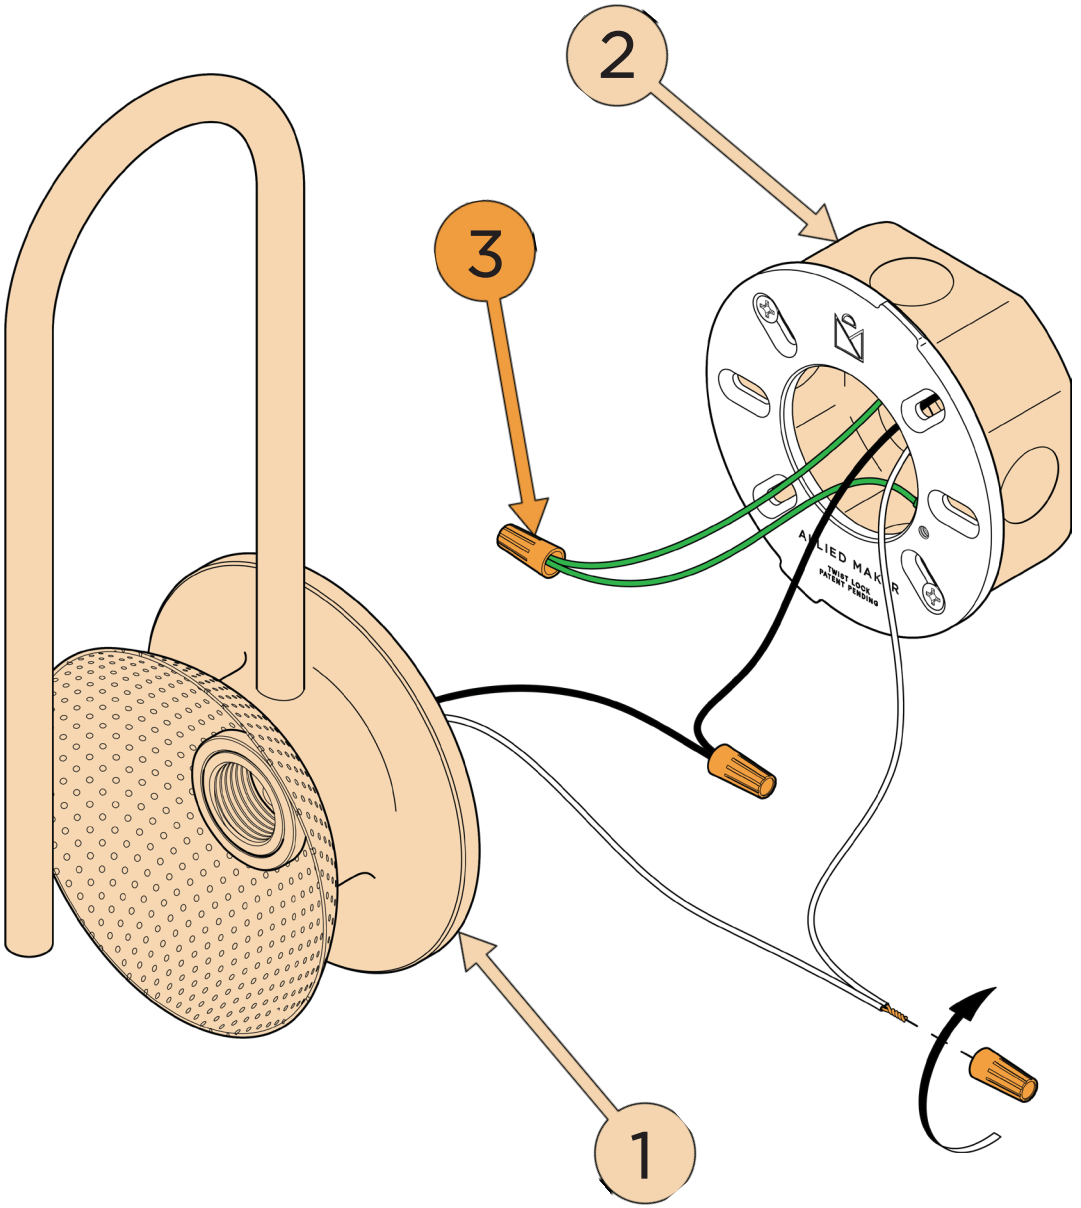

# 4

Align the tabs on the **backplate** (1) with the tab openings on the **canopy** (2)

Place the **canopy** (2) over the **backplate** (1) and rotate the **canopy** (2) to the desired position.

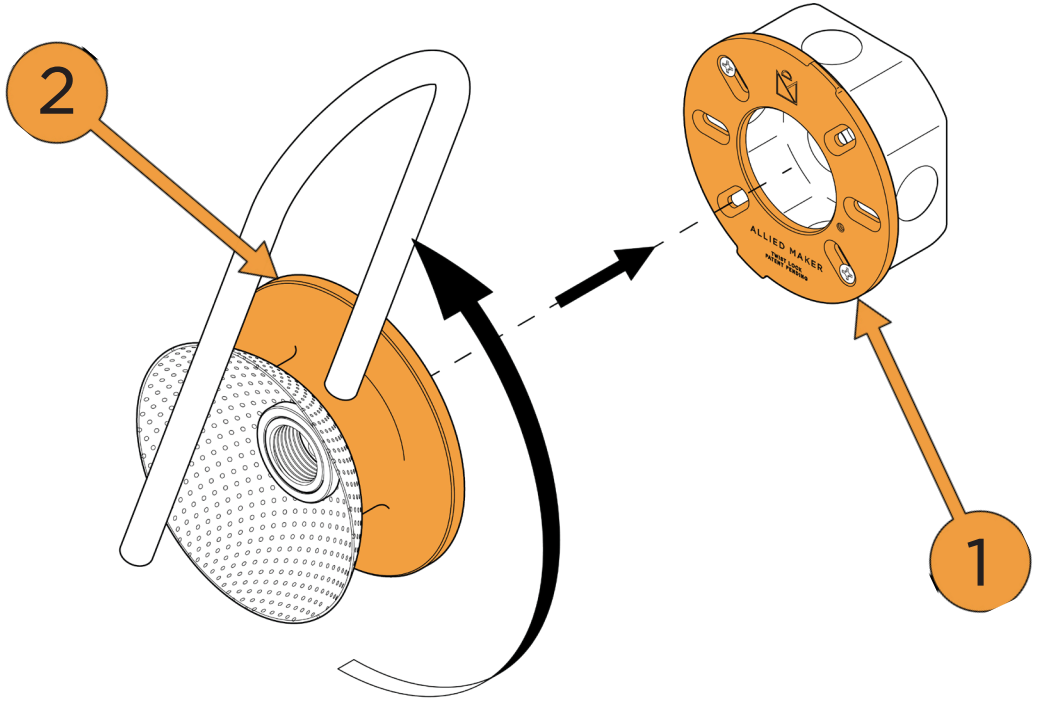


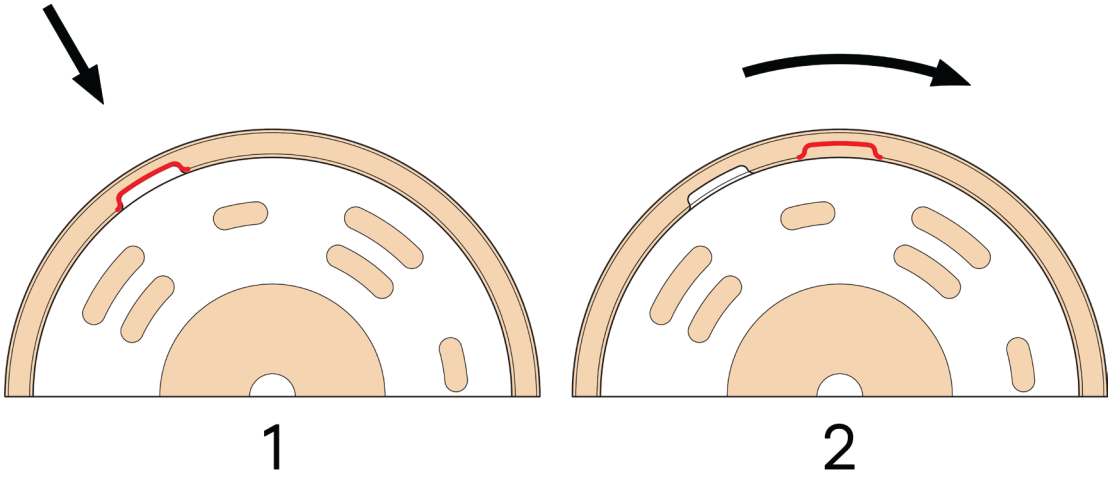

# 5

Using the 1/16 **hex driver** (1) tighten the **set screw** (2) in the **canopy** (3) to secure the **canopy** (3) into place.

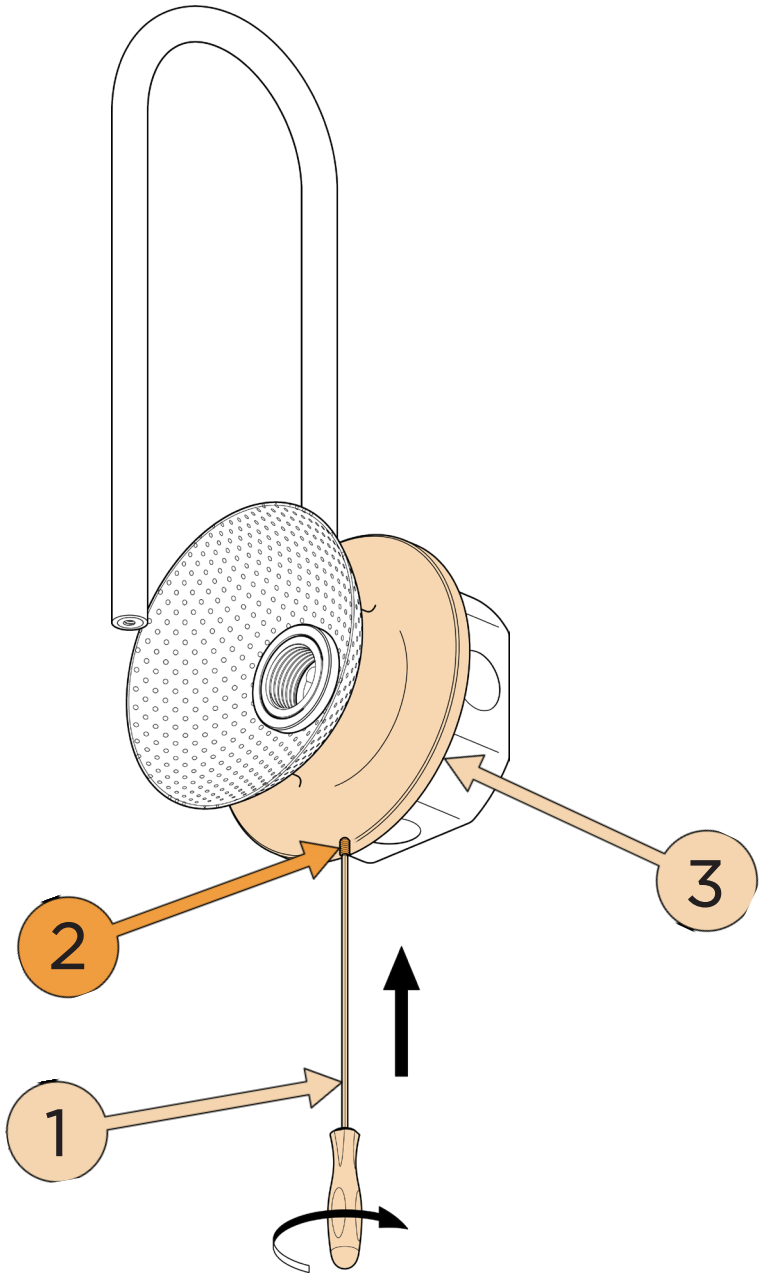

# 6

Screw the **light bulb** (1)
into the **fixture socket** (2)

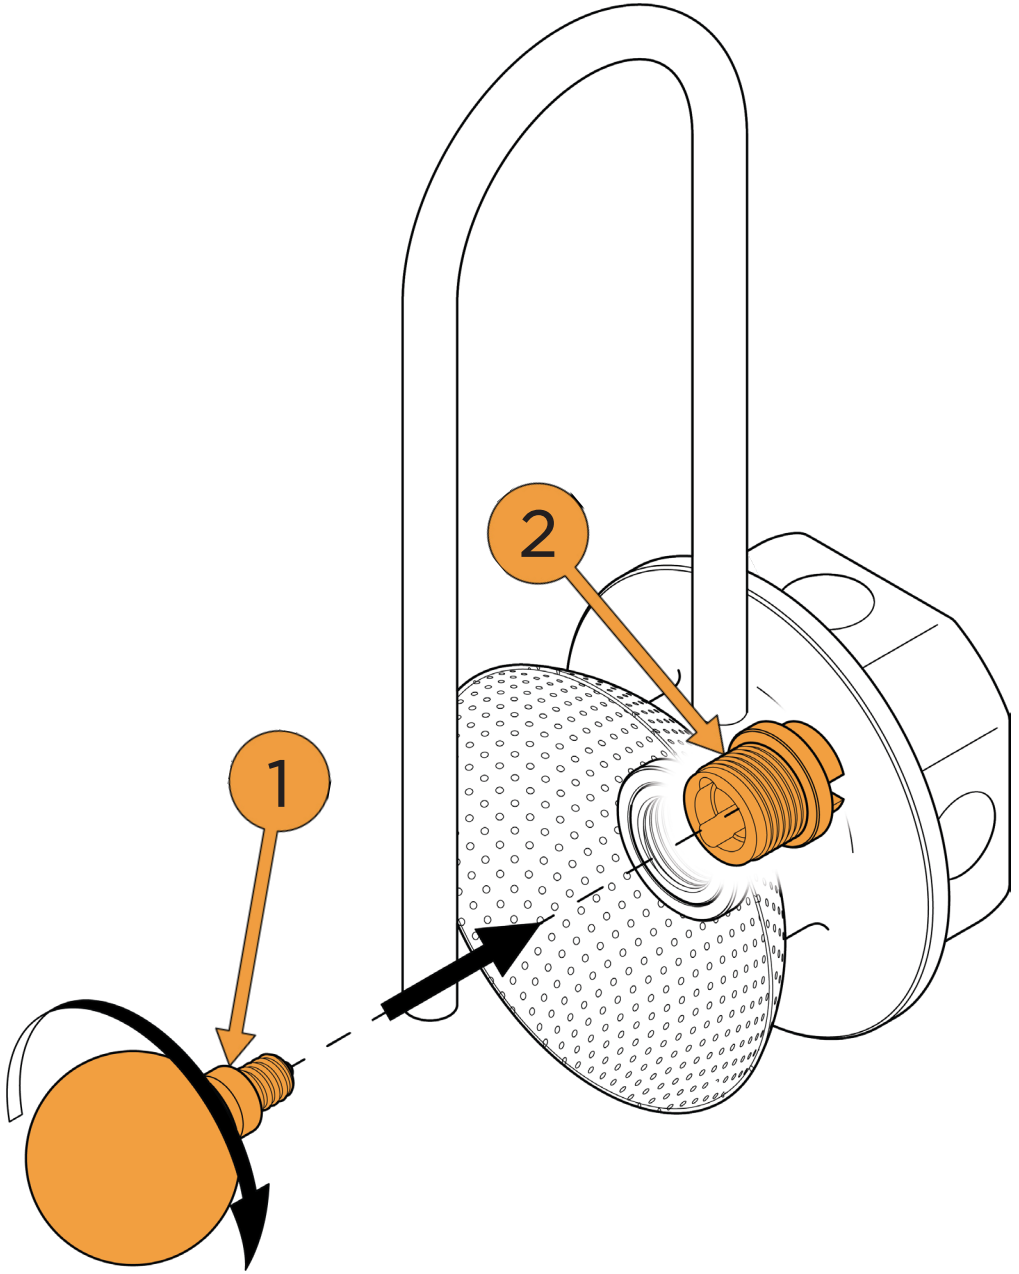

# 8

Insert the **shade holder** (1) onto the **bent tube** (2)

Using the **1/8 hex driver** (3) screw the **countersunk screw** (4) onto the **bent tube** (2) to secure the **shade** (5) into place.
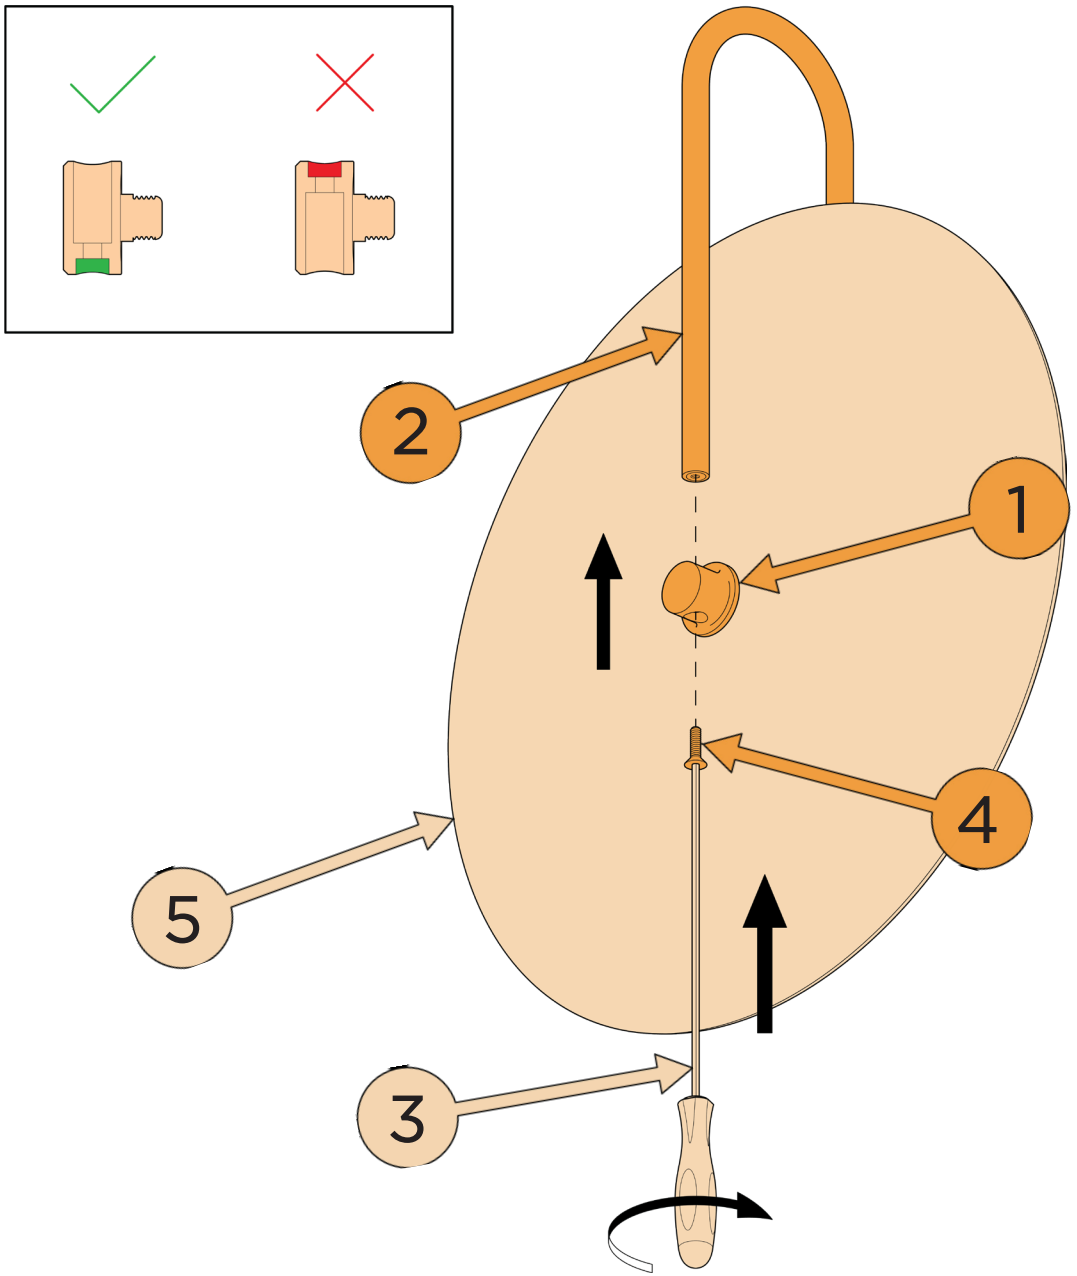
**NOTE:** Make sure the shade holder is facing the correct orientation with the shallow end facing downward. Also, carefully mount the alabaster shade onto the bent tube to avoid scratching the fixture and the alabaster.