



ALLIED MAKER

MADE IN NEW YORK

Buoy Pendant

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES












Wear Gloves!



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE
INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND
OPERATION OF THE PRODUCT AND HAZARDS INVOLVED



Contents Included


 <p>Hooks</p>	 <p>Canopy</p>	 <p>2x Phillips Screw</p>	 <p>1/16 Hex Driver</p>
 <p>Shade</p>	 <p>Plate Ring</p>	 <p>Hang Tube</p>	 <p>Light Bulb</p>
	 <p>Acrylic Plate</p>	 <p>Lighting Fixture</p>	 <p>Glass</p>

1

Using the provided hex driver ①
loosen the set screw ②
from the canopy ③

Remove the backplate ④

Remove the lock ring ⑤
and ball stop ⑥

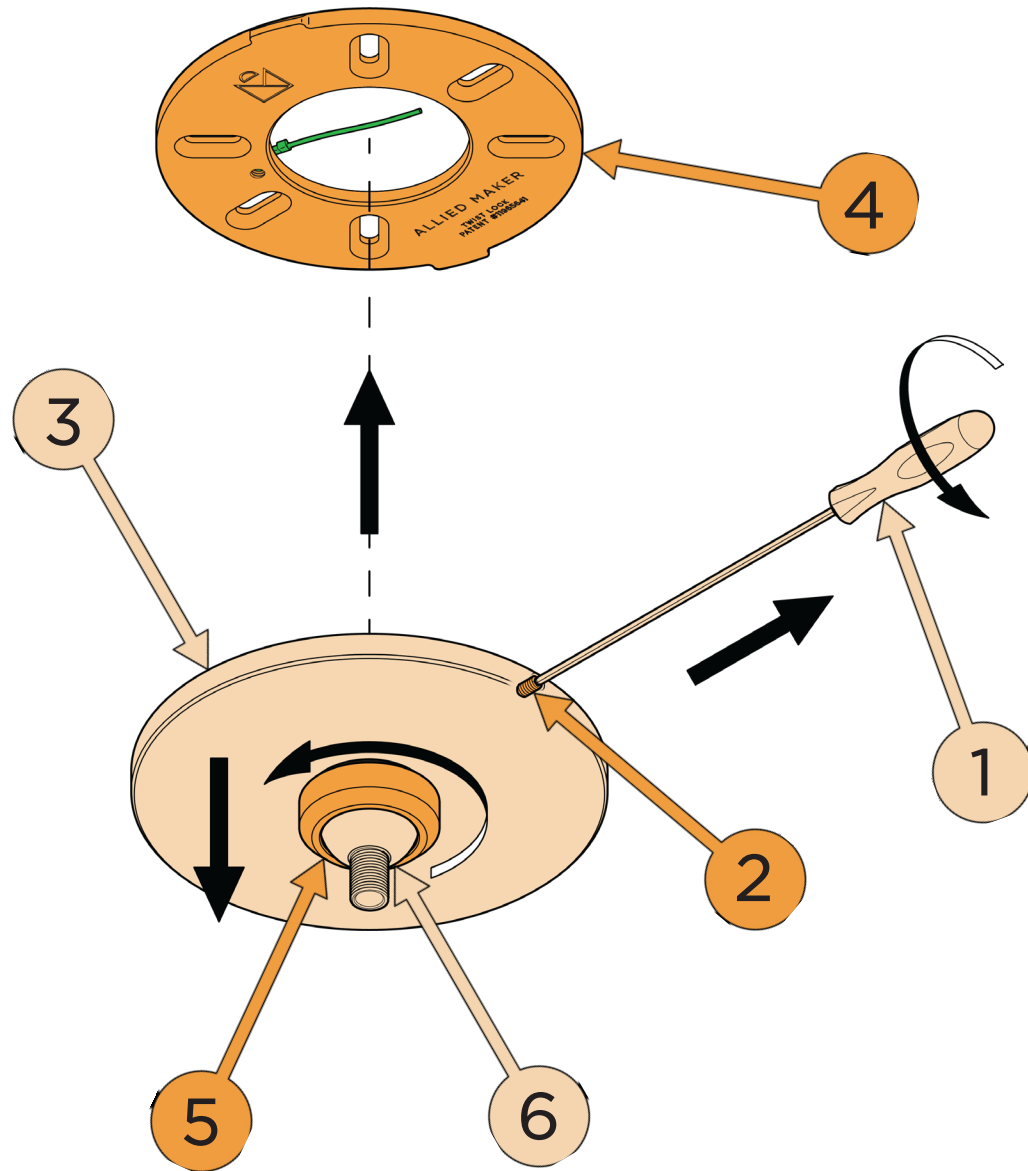


2

Mount the backplate ① onto the junction box ② using the provided phillips screws ③

NOTE: Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

CAUTION: Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

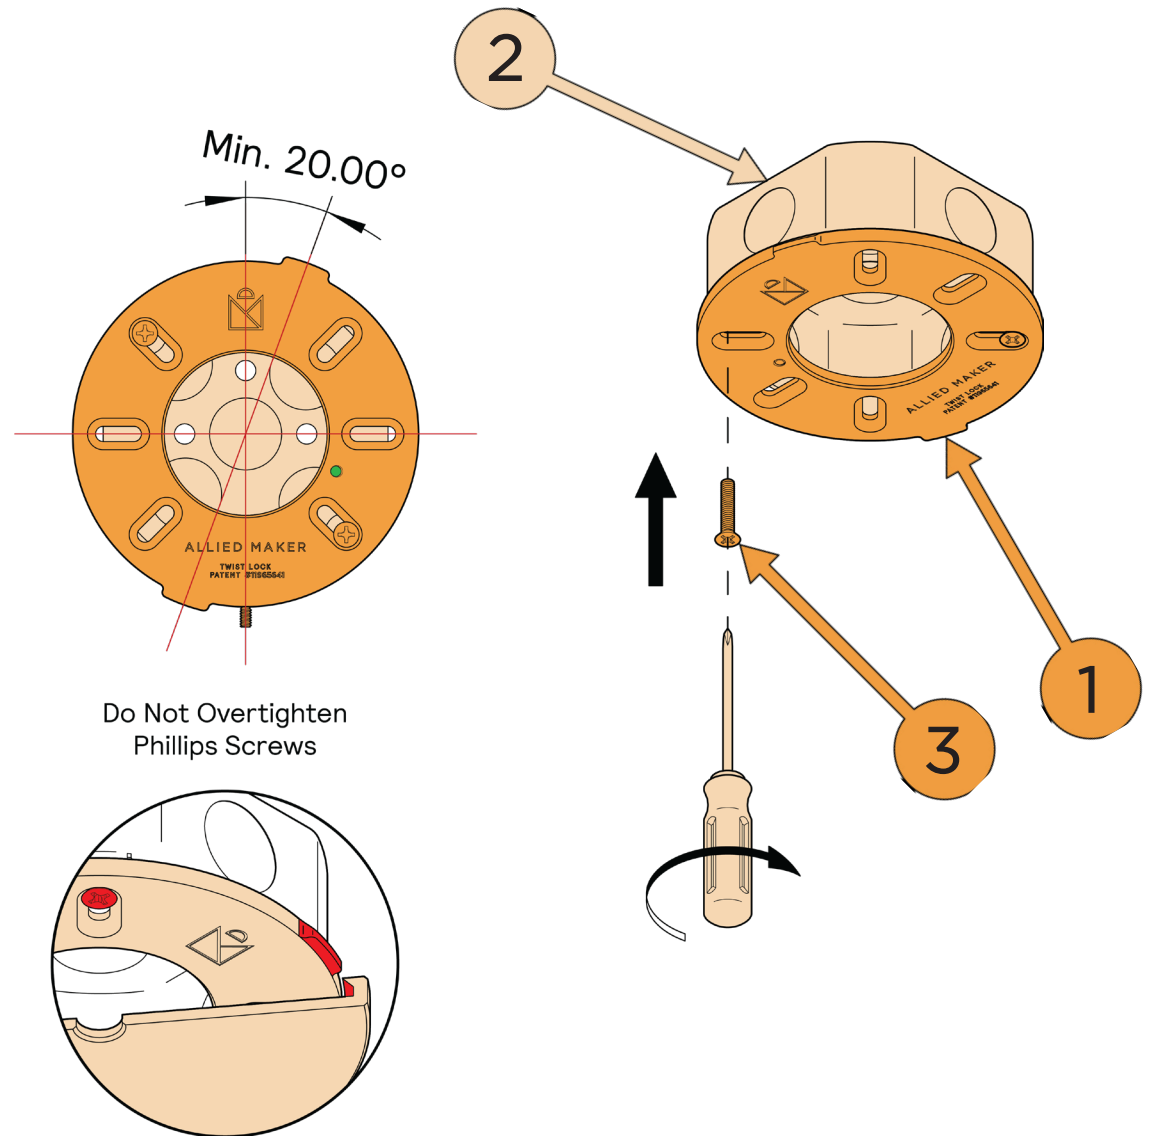


3

Connect the ground wire from the junction box ① with the ground wire from the backplate ② using a wire nut ③

Travel the wires from the junction box ① through the canopy ④


Align the tabs on the backplate ② with the tab openings on the canopy ④

Place the canopy ④ over the backplate ② and rotate the canopy ④ to the desired position.

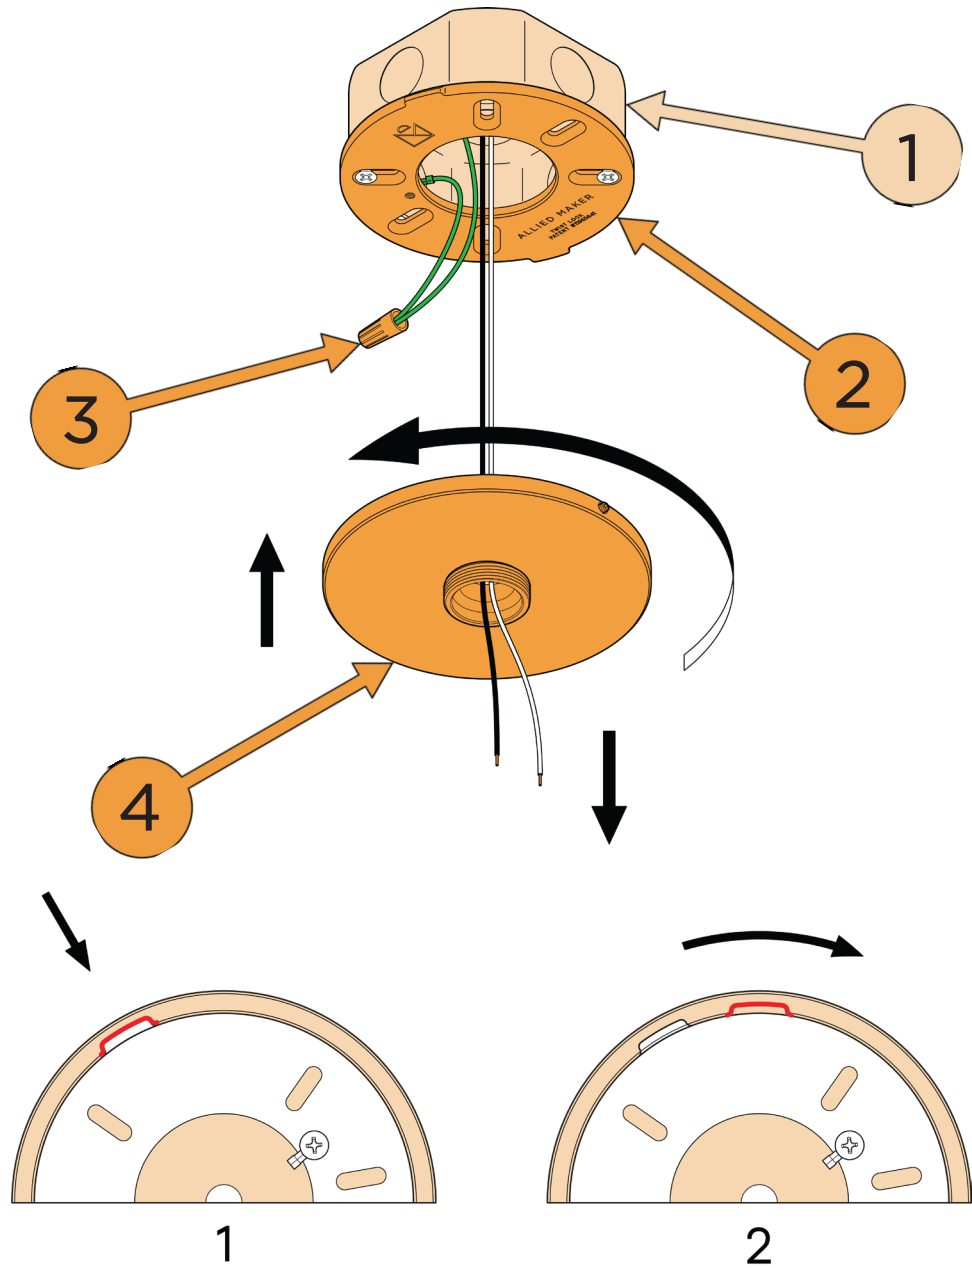

4

Using the hex driver ① tighten the set screw ② in the canopy ③ to secure the canopy ③ into place.

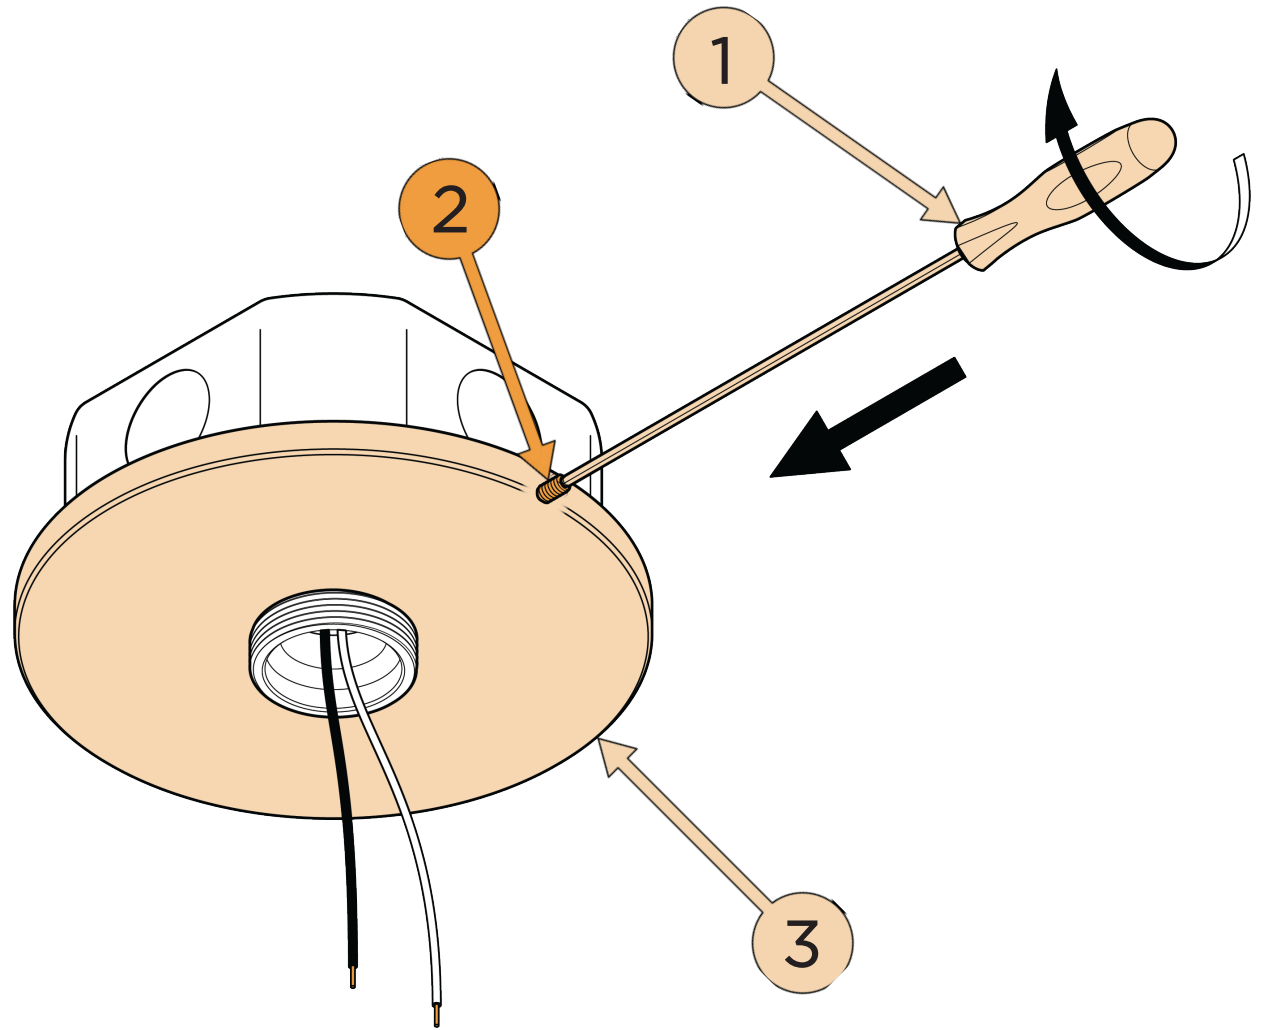


5

Carry the acrylic plate ①
and the plate ring ②
down the lighting fixture ③

Travel the wires from the lighting fixture ③
through the hooks ④
and the hang tube ⑤

Place the hooks ④
over the lighting fixture ③

Screw the hang tube ⑤
onto the lighting fixture ③
to secure the hooks ④ into place.

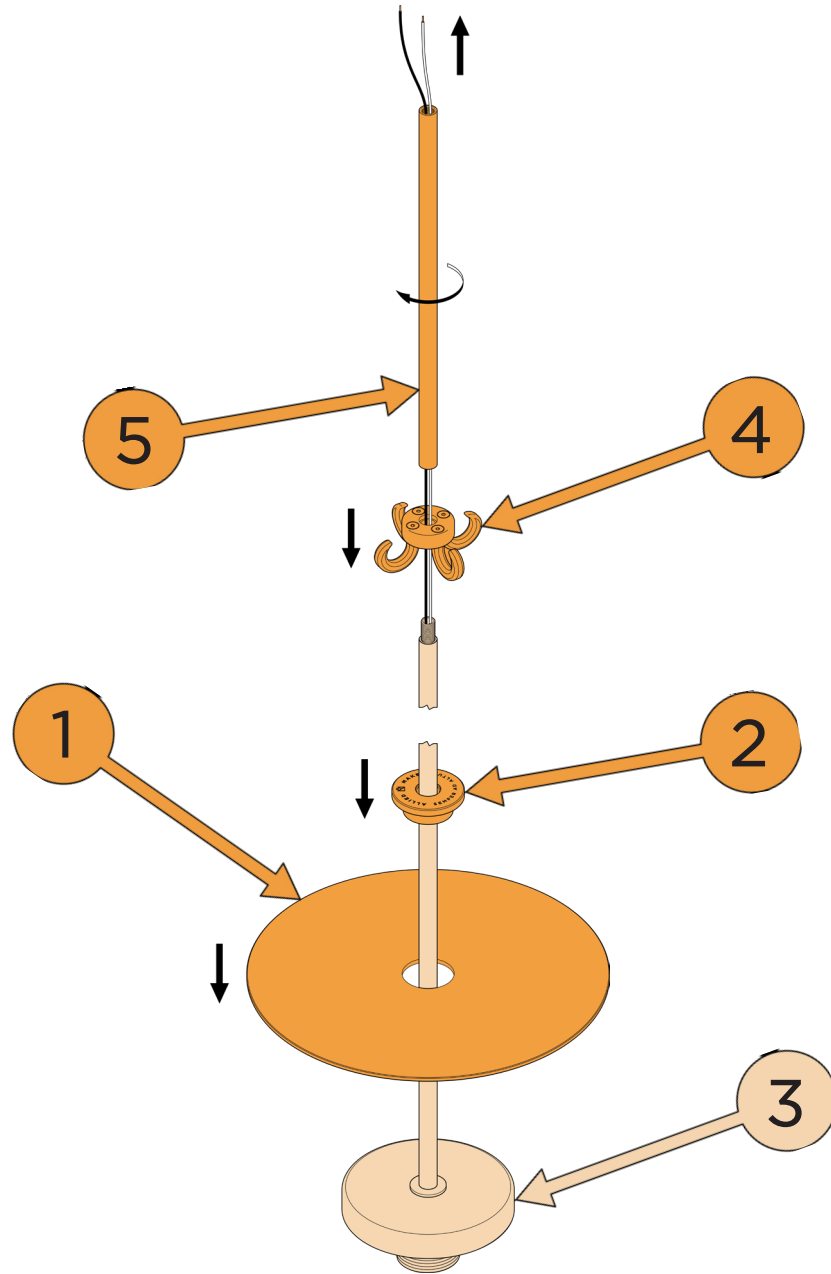


6

Continue to travel the wires through the lock ring ① and the ball stop ②

Carry the lock ring ① down the hang tube ③

Screw the ball stop ② onto the hang tube ③

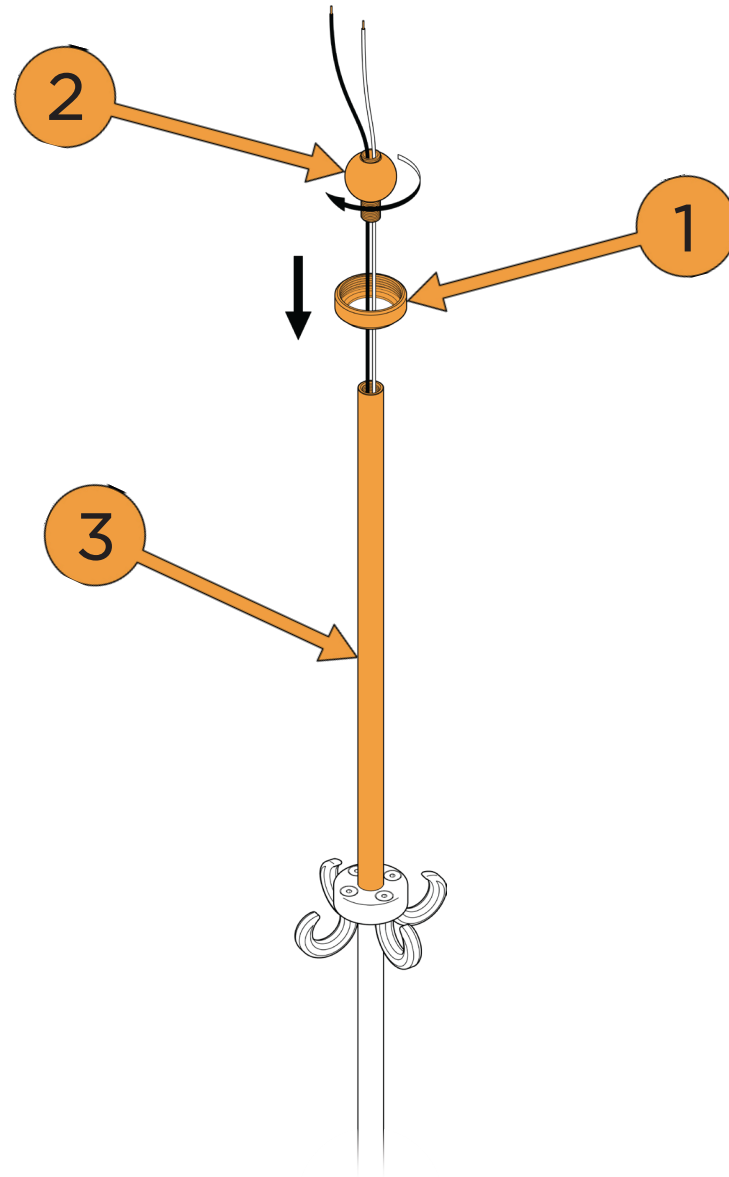


7

Connect the wires from the lighting fixture ① with the wires from the junction box ② using wire nuts ③


Insert the wires and then the ball stop ④ inside the adapter ⑤ and hold in place.

Screw the lock ring ⑥ onto the adapter ⑤ to secure the ball stop ④ into place.

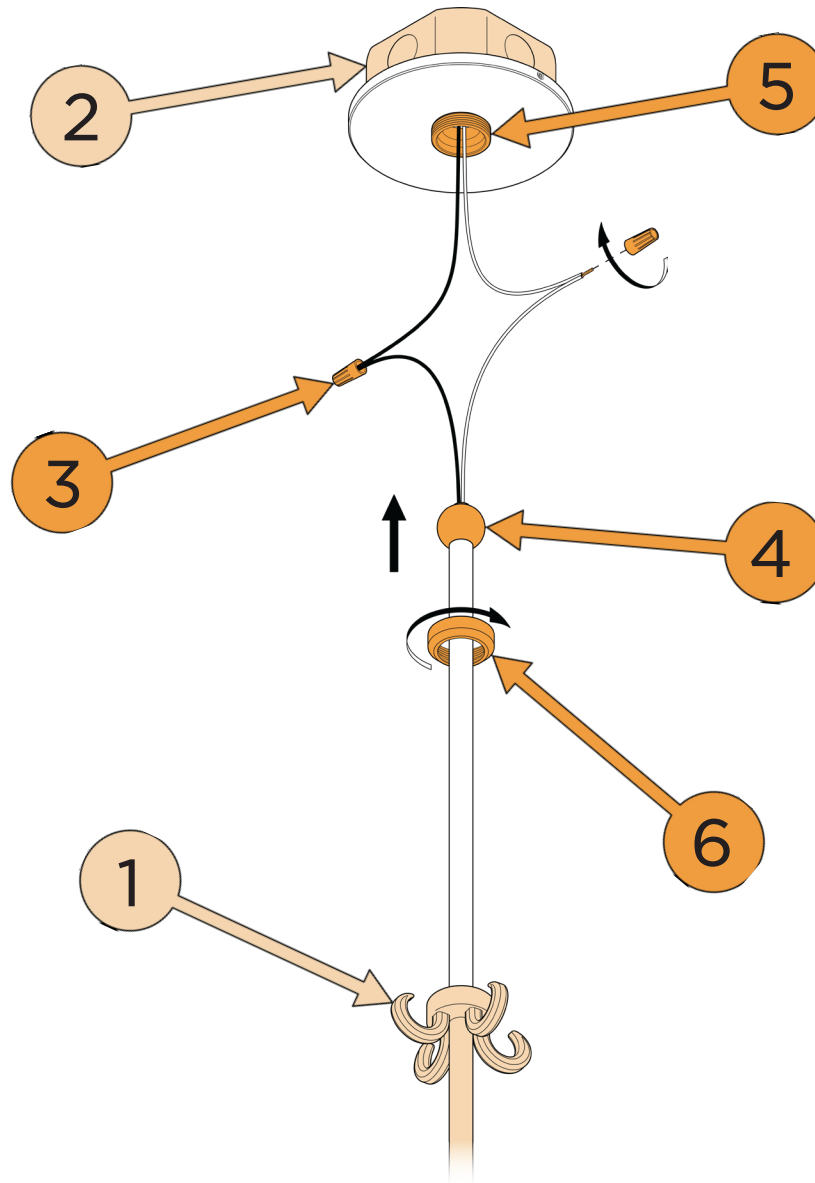

8


Screw the light bulb ①
into the fixture socket ②

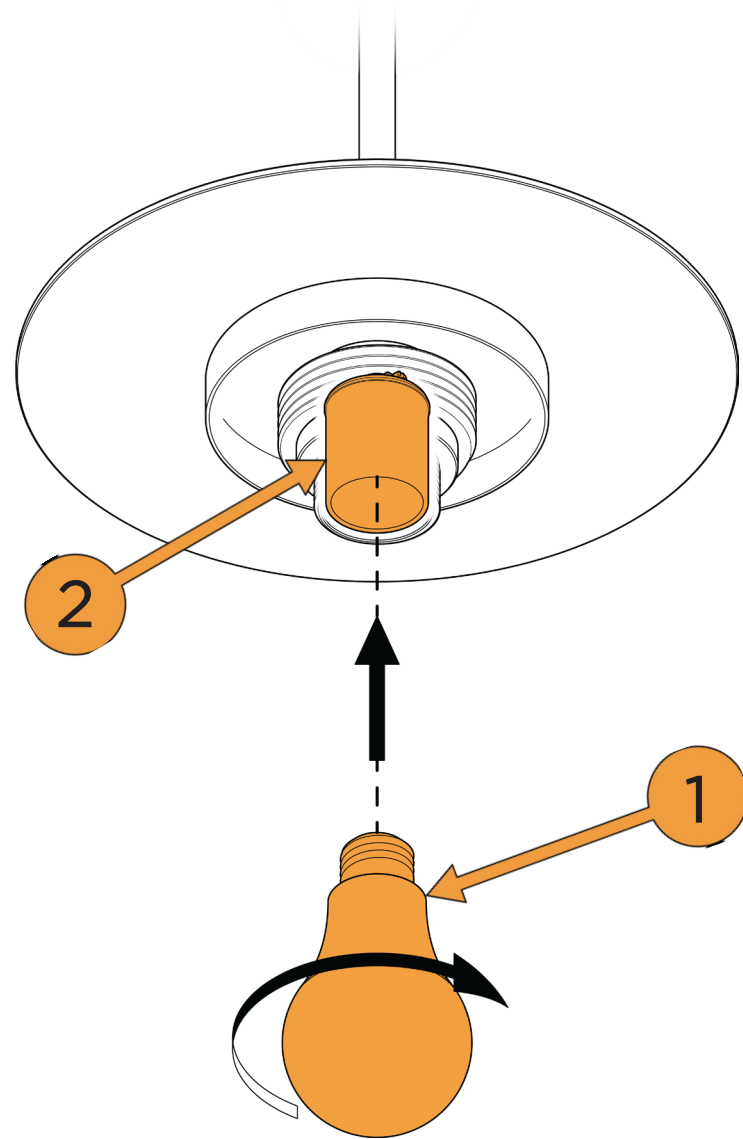

9

Screw the glass ①
onto the adapter ②

CAUTION: Align threads properly
for a smooth rotation before
twisting to avoid jamming.
Do not overtighten the glass.

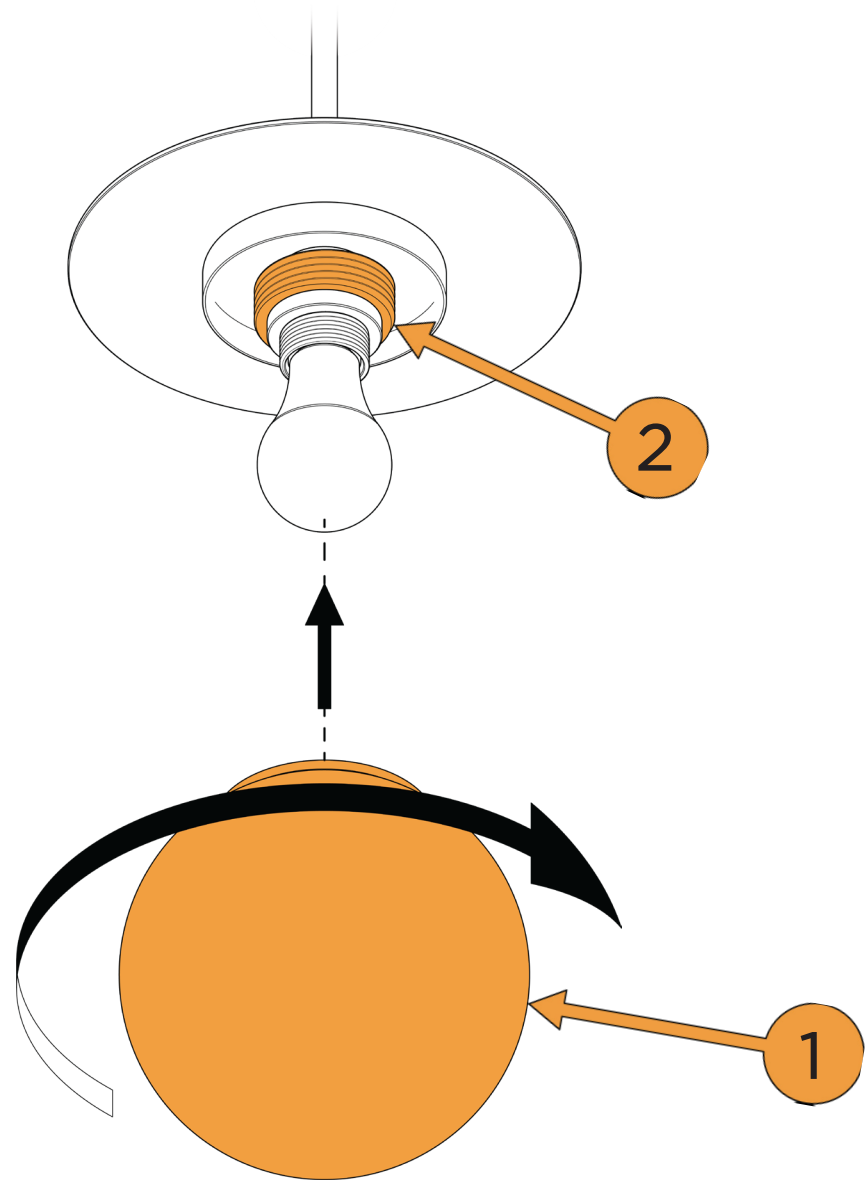

10

While holding the shade ① in place, attach the four ropes ② onto the hooks ③ to secure the shade ① into place.

Note: 2 person install.

