ALLIED MAKER

MADE IN NEW YORK

Dual Globe Sconce

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included



Lighting Fixture

2x Light Bulb



2x Phillips Screw



2x Glass

1/16 Hex Driver

1

Using the provided **hex driver** (1)
loosen the **set screw** (2)
from the **canopy** (3)

Remove the **backplate** (4)

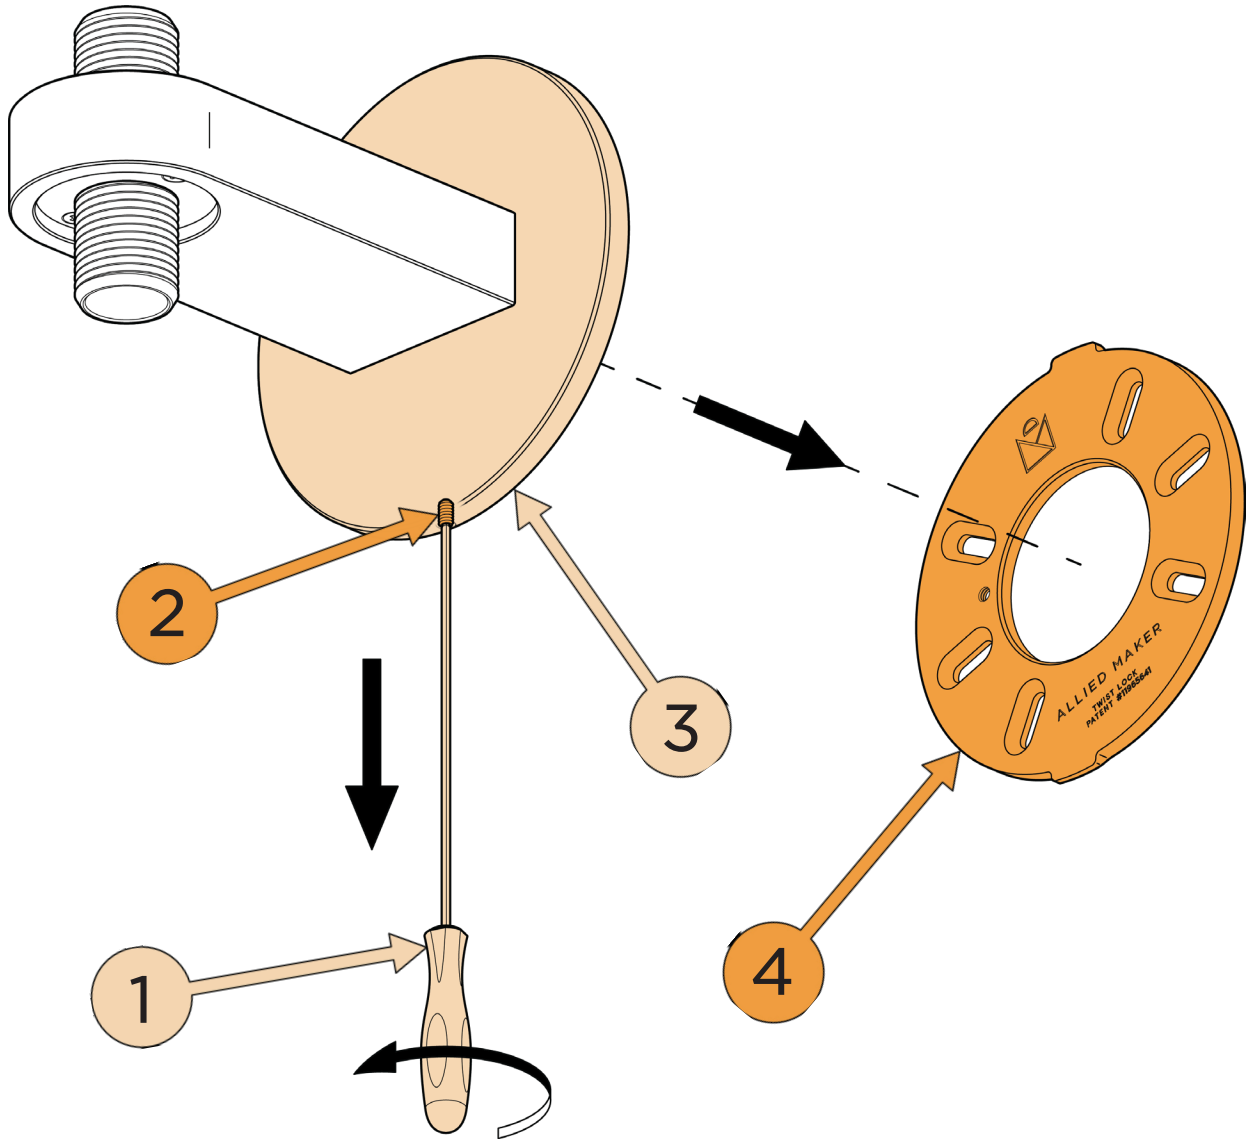

2

Mount the **backplate** (1) onto the **junction box** (2) using the provided **phillips screws** (3)

NOTE: Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

CAUTION: Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

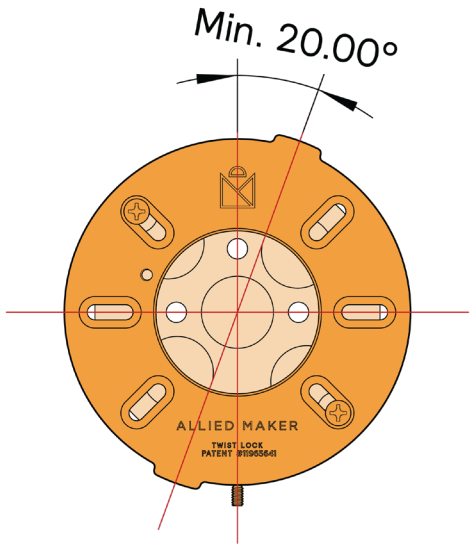

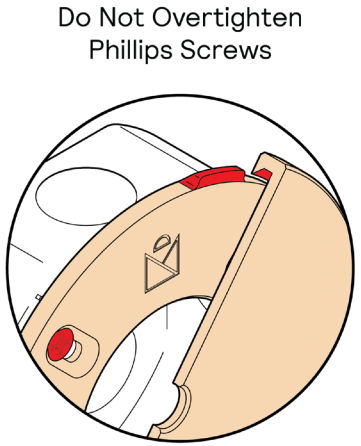

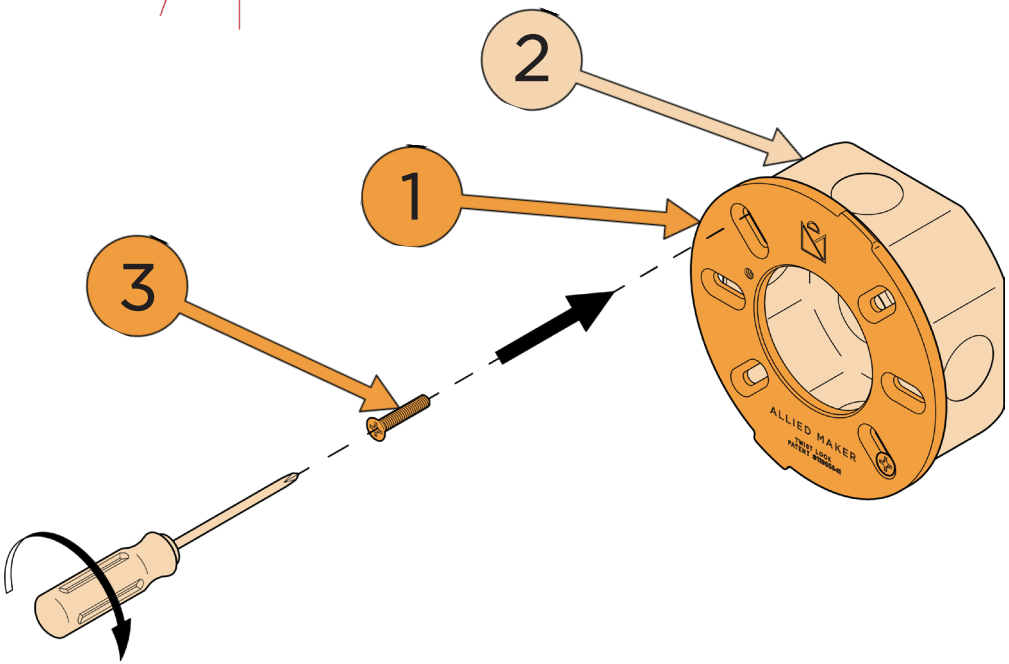

3

Connect the wires
from the **lighting fixture** (1)
with the wires from the
junction box (2) using **wire nuts** (3)

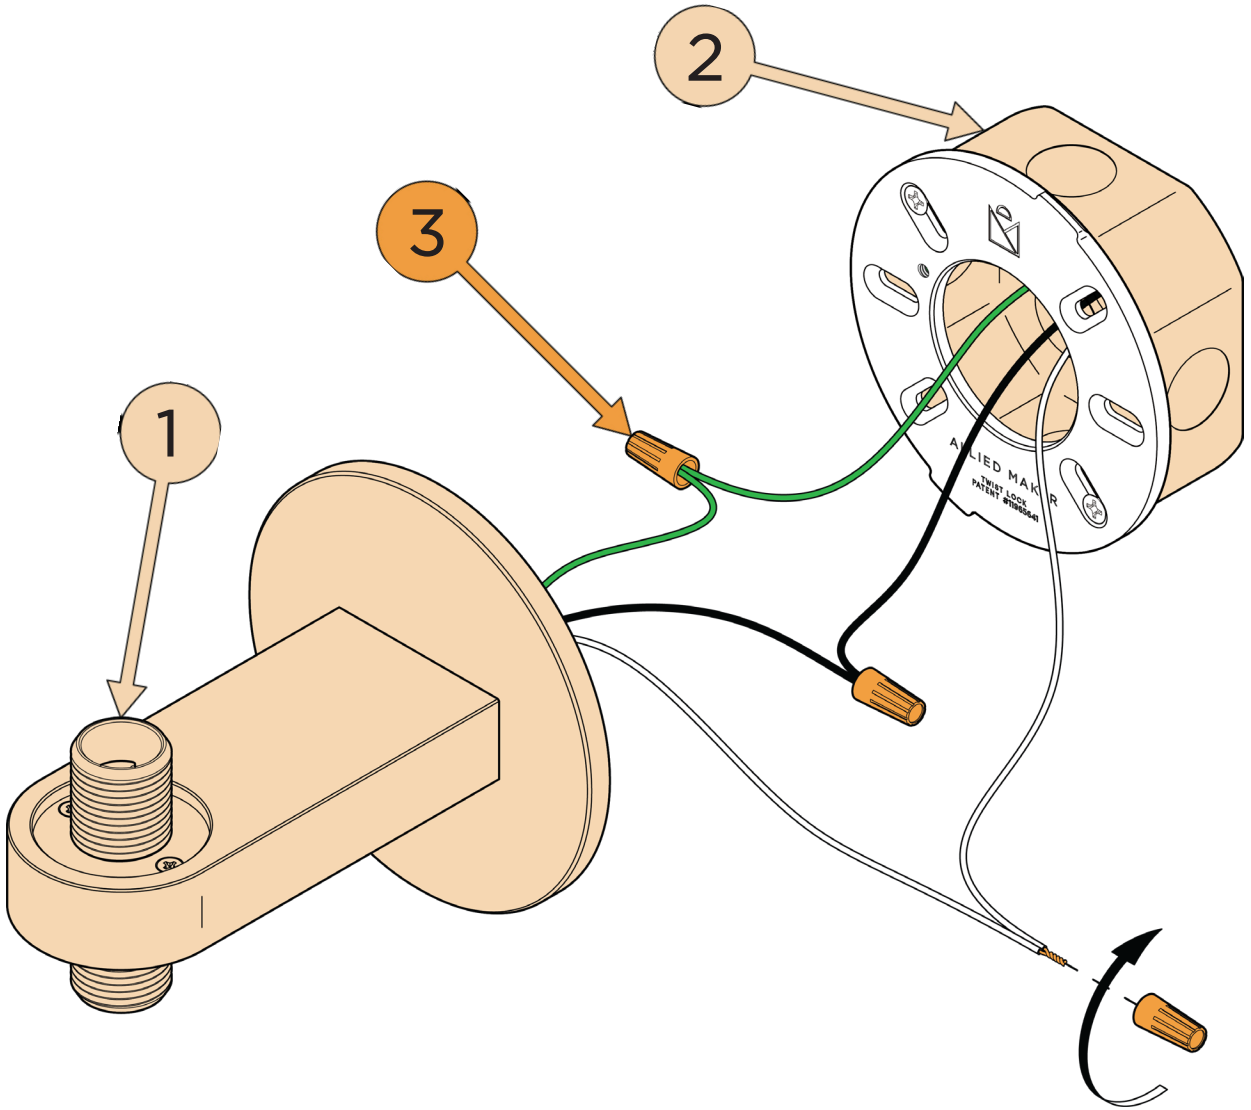

4

Align the tabs on the **backplate** (1) with the tab openings on the **canopy** (2)

Place the **canopy** (2) over the **backplate** (1) and rotate the **canopy** (2) to the desired position.

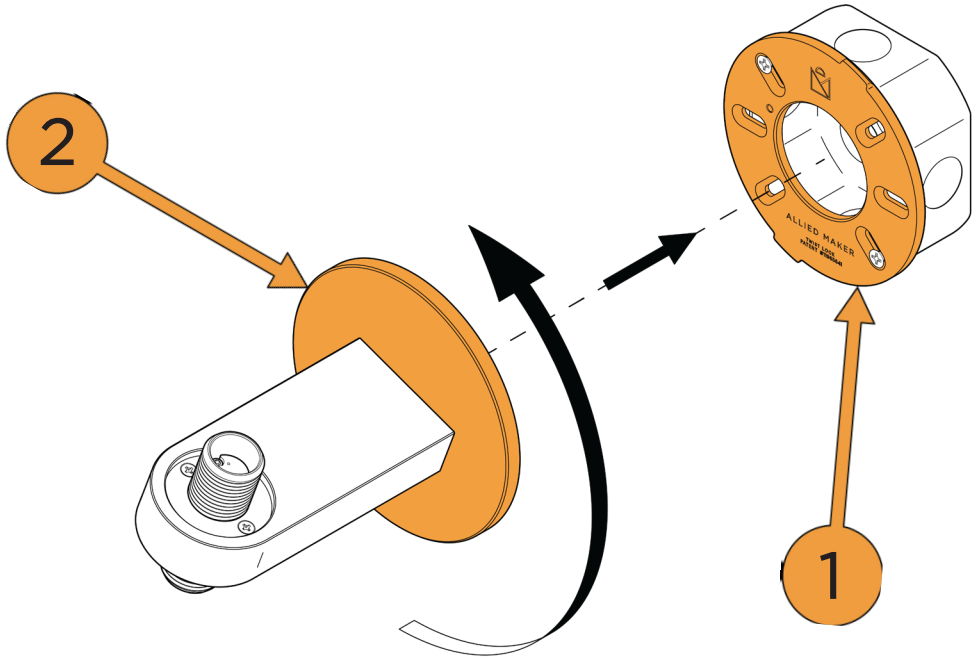

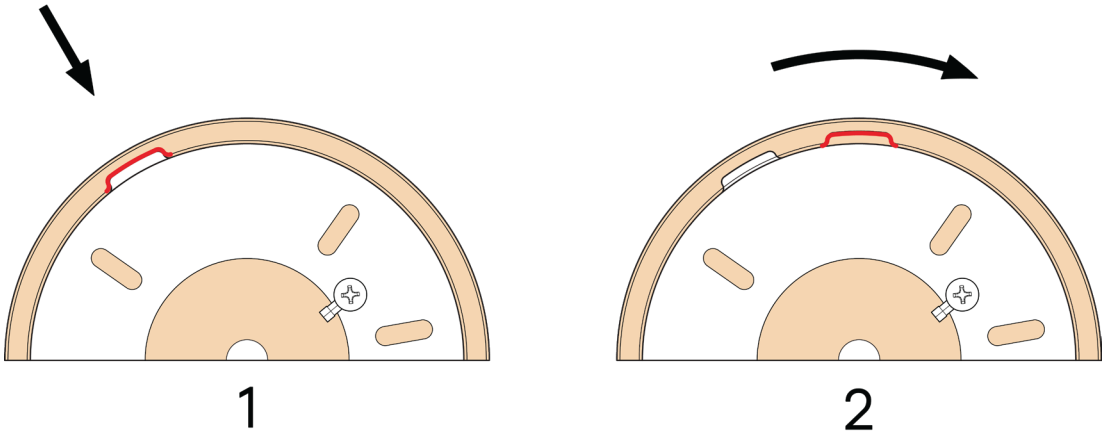

5

Using the **hex driver** (1) tighten the **set screw** (2) in the **canopy** (3) to secure the **canopy** (3) into place.

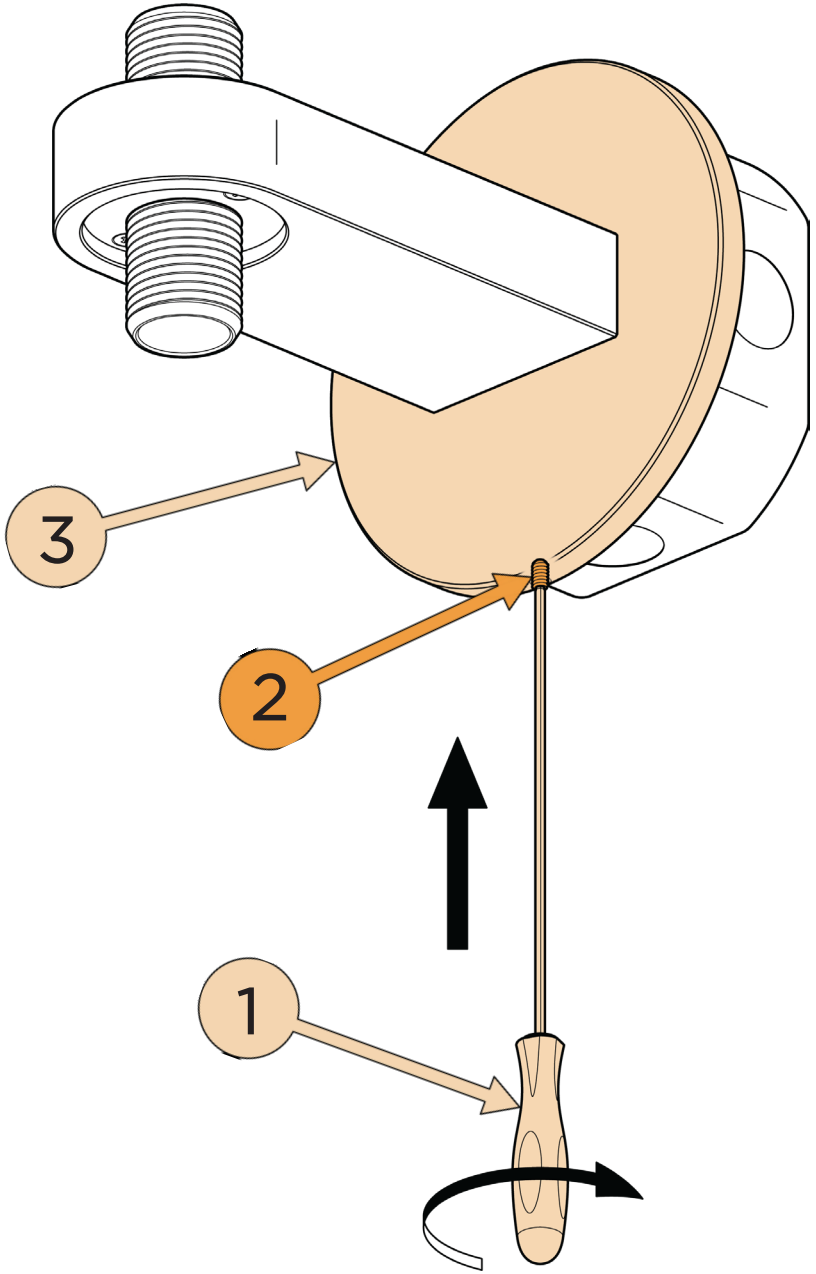

6

Insert the **light bulbs** (1)
into the **fixture sockets** (2)
CRITICAL: Align pins with
pin holes, then push in.

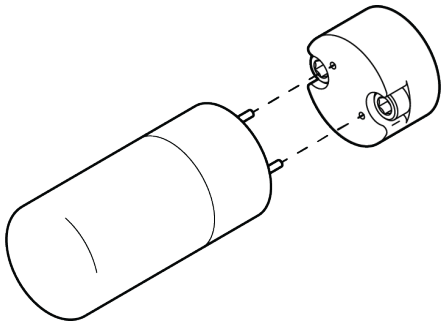

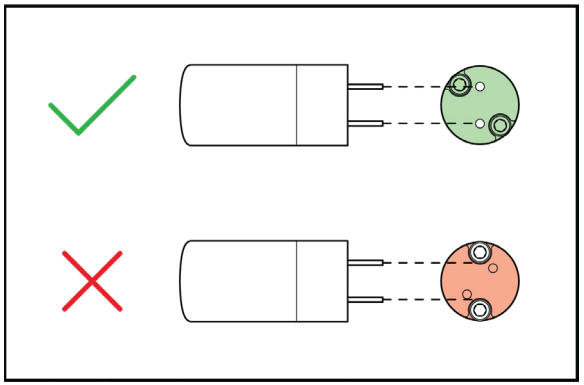

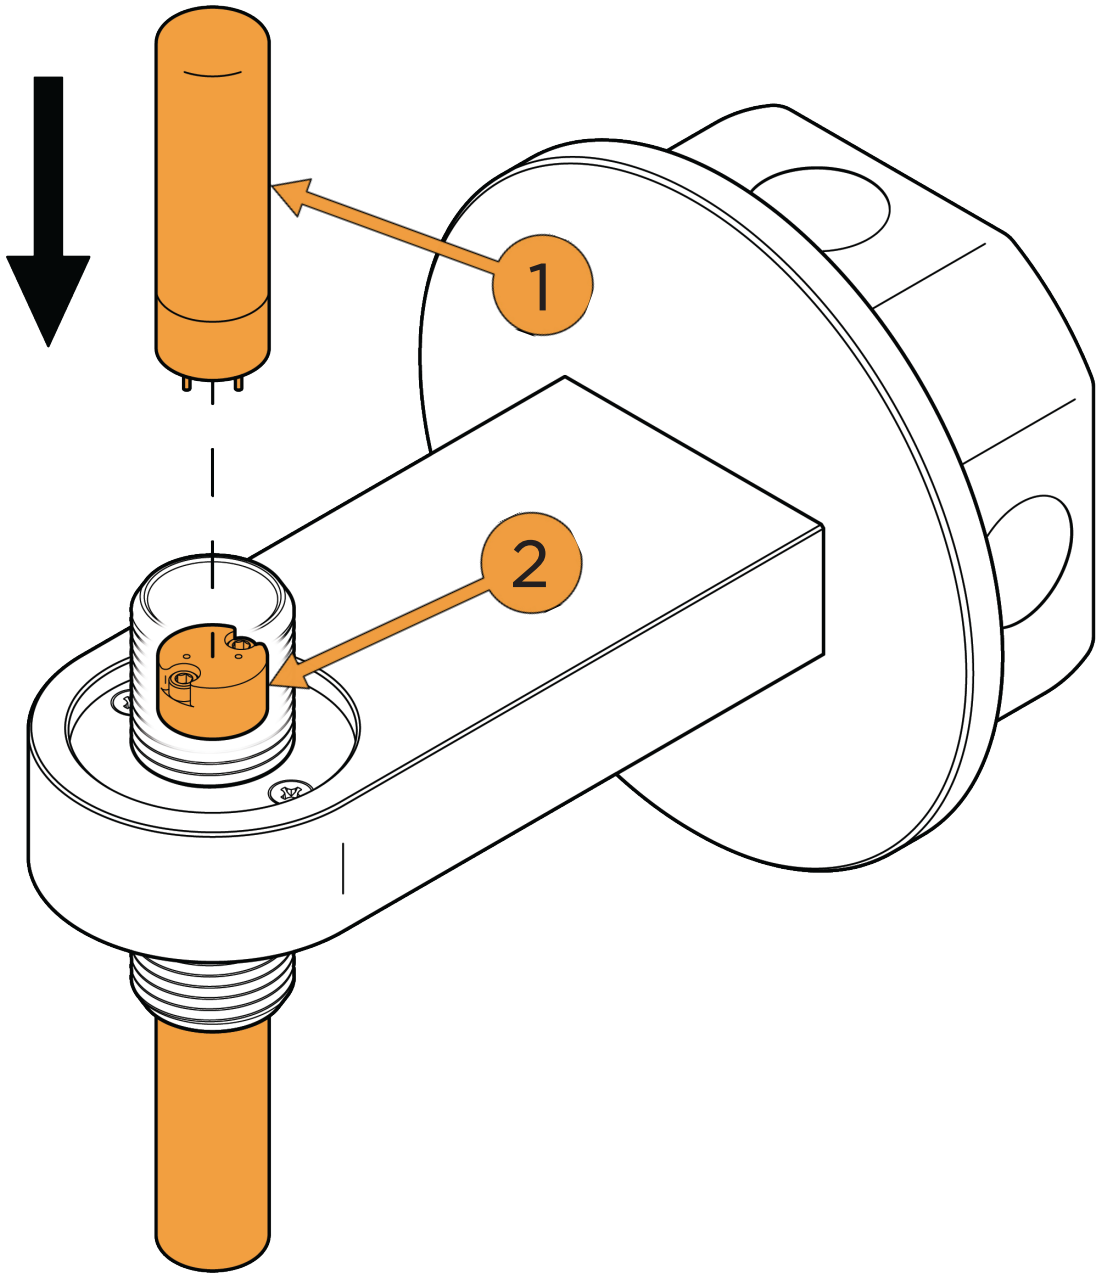

7
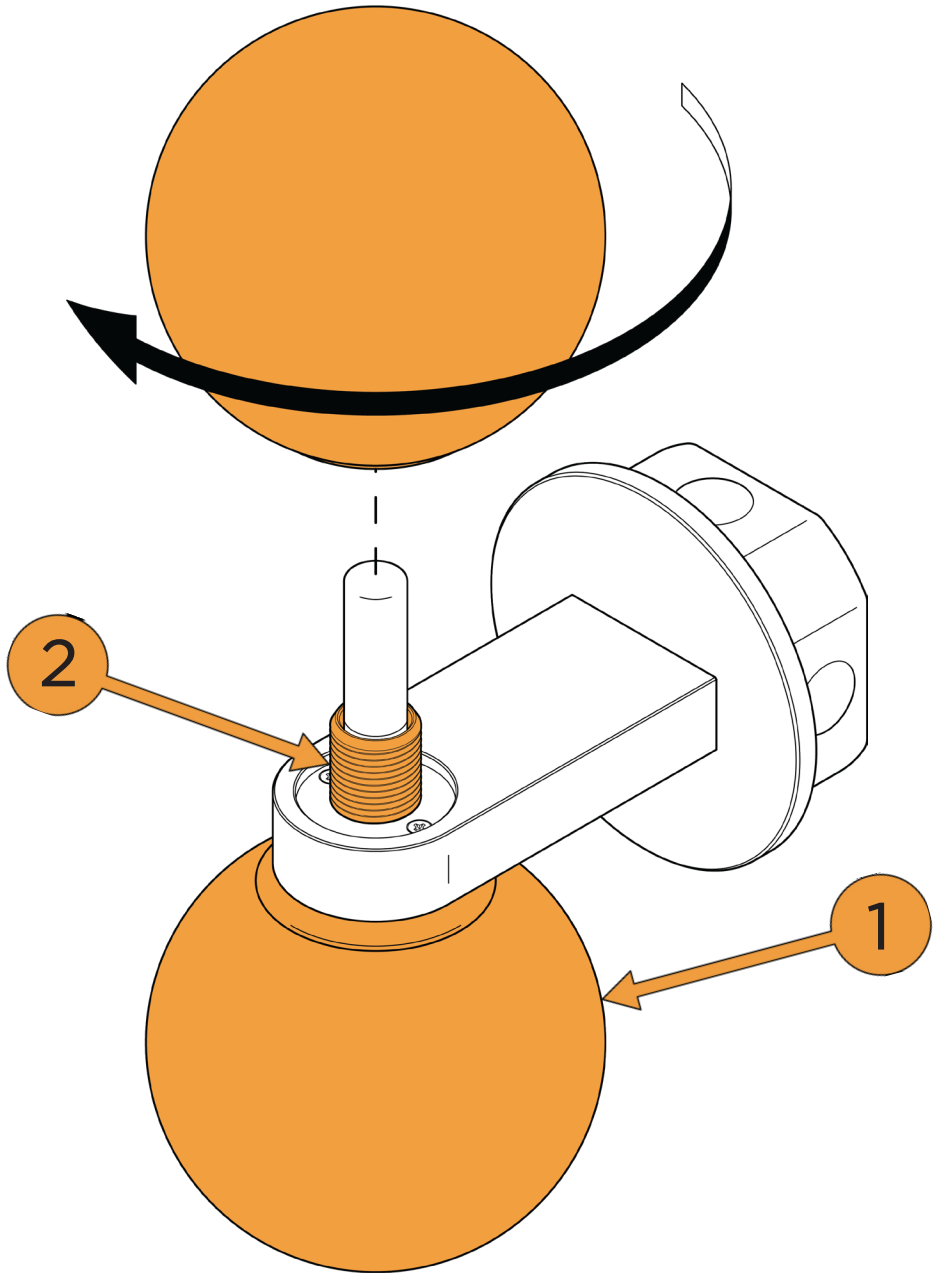
Screw the **glass** (1)
onto the **socket covers** (2)
CAUTION: Align threads properly
for a smooth rotation before
twisting to avoid jamming.
Do not overtighten the glass.