ALLIED MAKER

MADE IN NEW YORK

Molten Sconce

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included

 Shade	 Light Bulb	 2x Phillips Screw
 Lighting Fixture	Glass	1/16 Hex Driver

1

Remove the **adapter** (1)
from the **socket cover** (2)

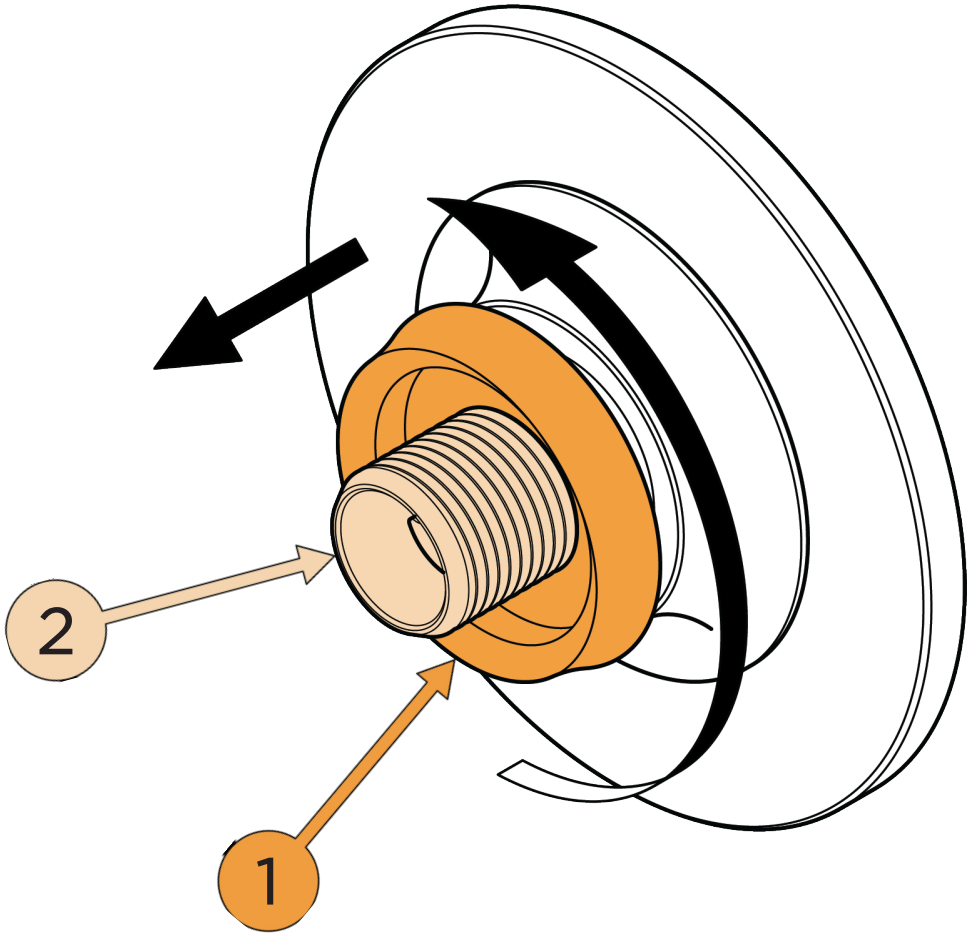

2

Using the provided **1/16 hex driver** (1)
loosen the **set screw** (2)
in the **canopy** (3)

Remove the **backplate** (4)

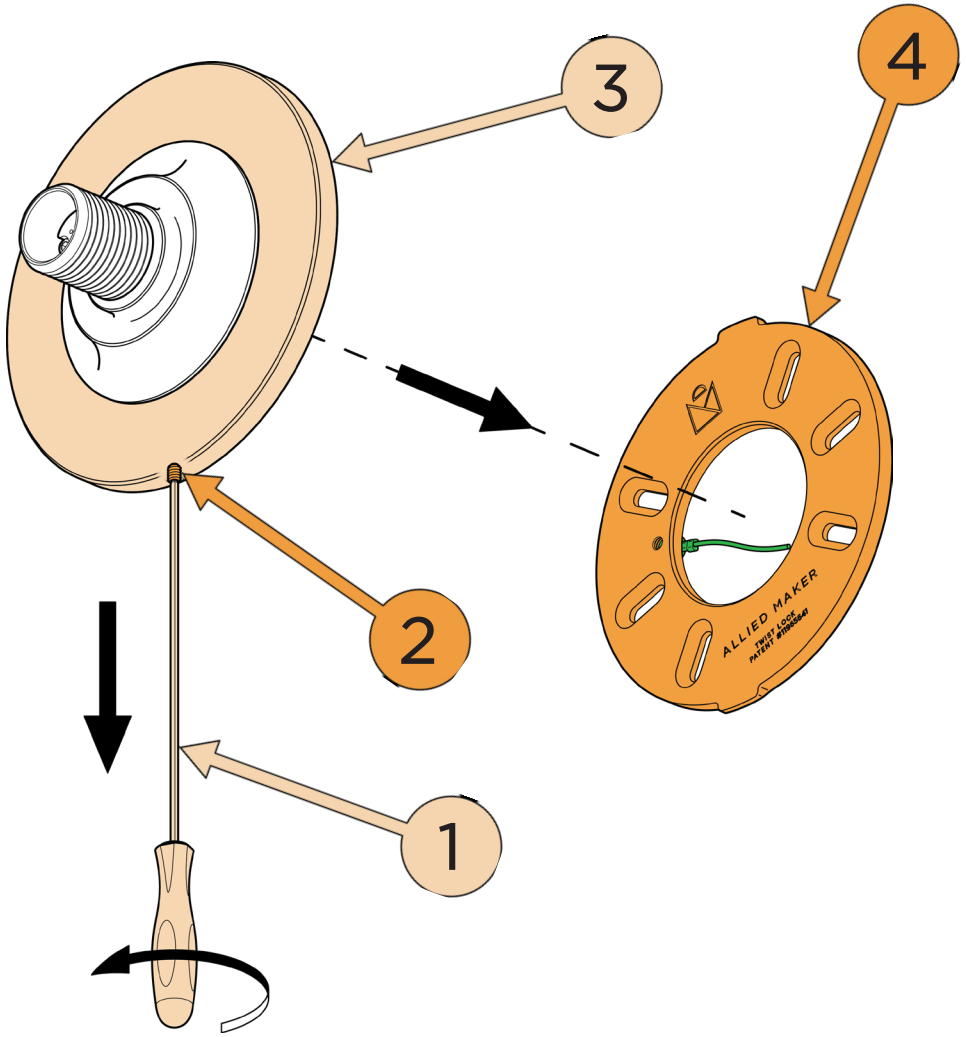

3

Mount the **backplate** (1) onto the **junction box** (2) using the provided **phillips screws** (3)

NOTE: Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

CAUTION: Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

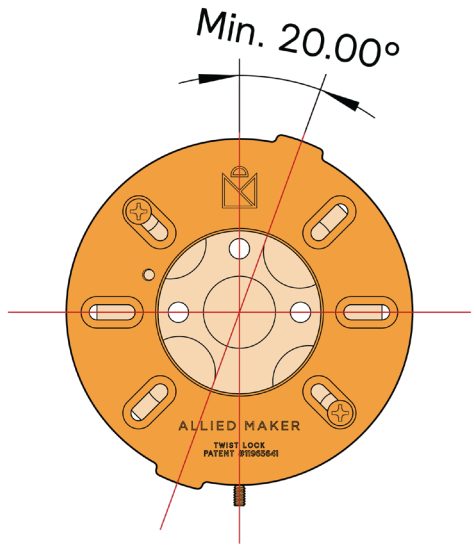

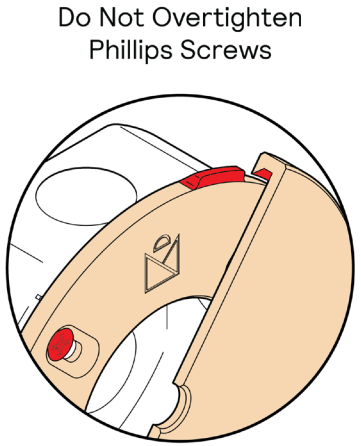

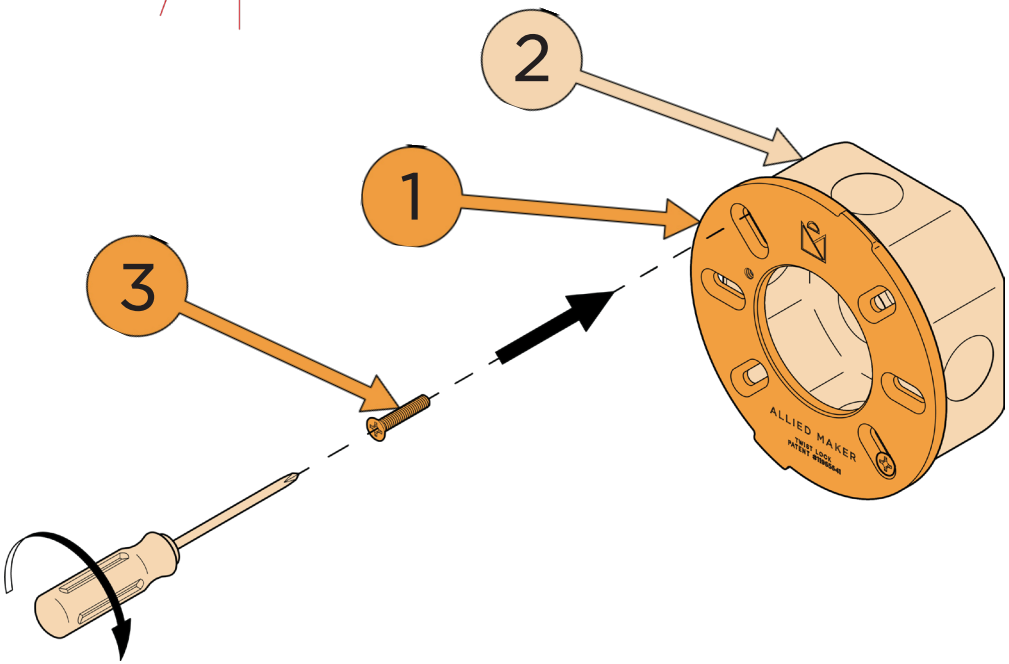

4

Connect the wires
from the **lighting fixture** (1)
with the wires from the
junction box (2) using **wire nuts** (3)

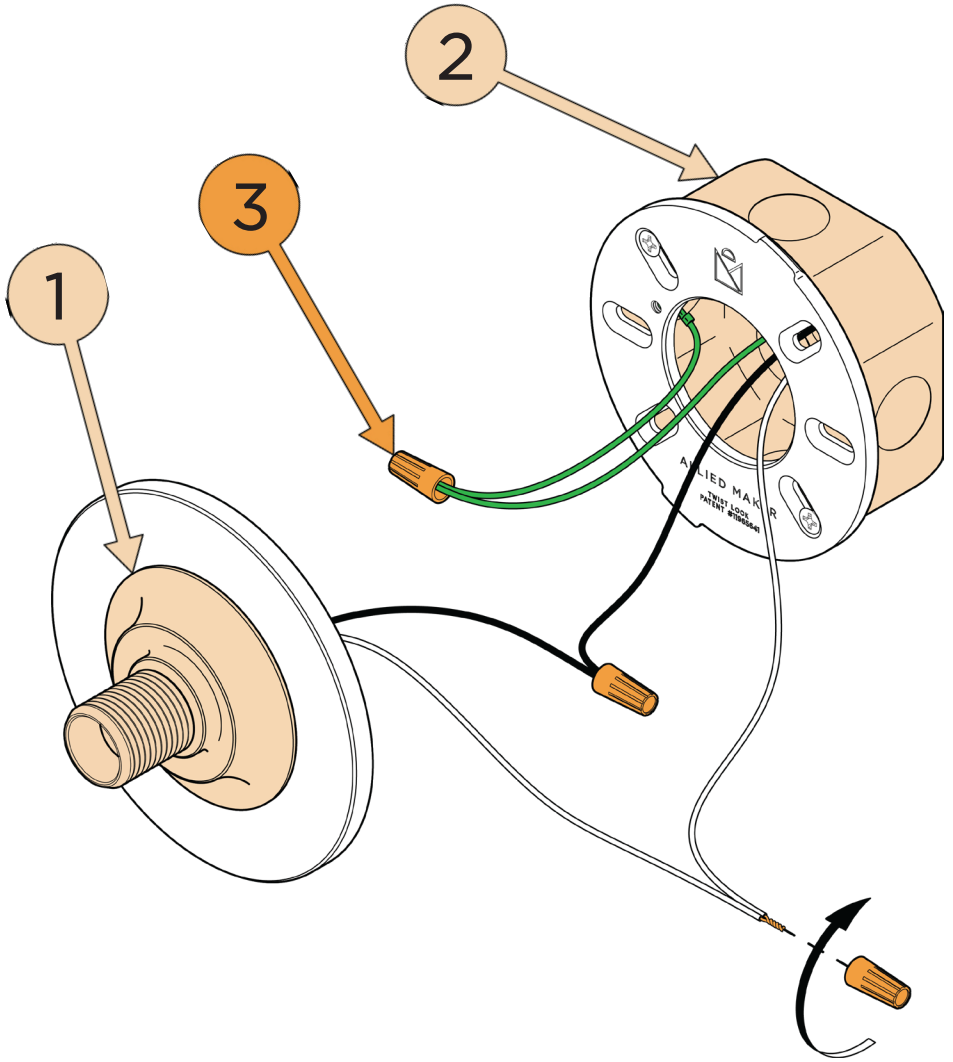

5

Align the tabs on the **backplate** (1) with the tab openings on the **canopy** (2)

Place the **canopy** (2) over the **backplate** (1) and rotate the **canopy** (2) to the desired position.

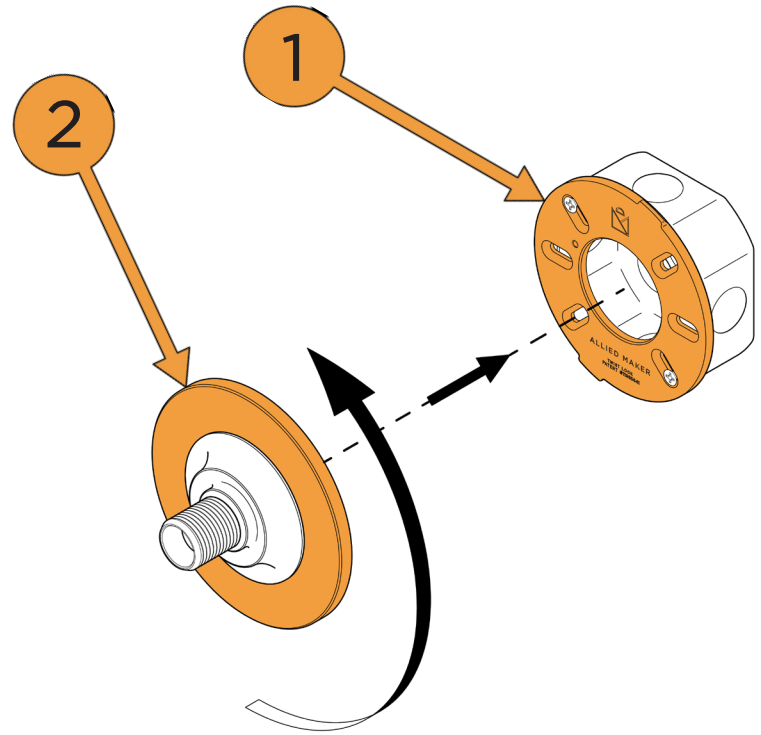

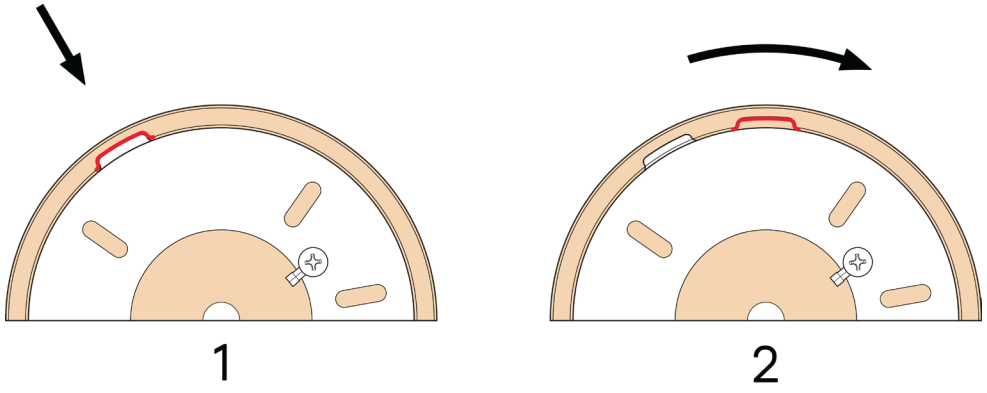

6

Using the **1/16 hex driver** (1)
tighten the **set screw** (2)
in the **canopy** (3)
to secure the **canopy** (3)
into place.

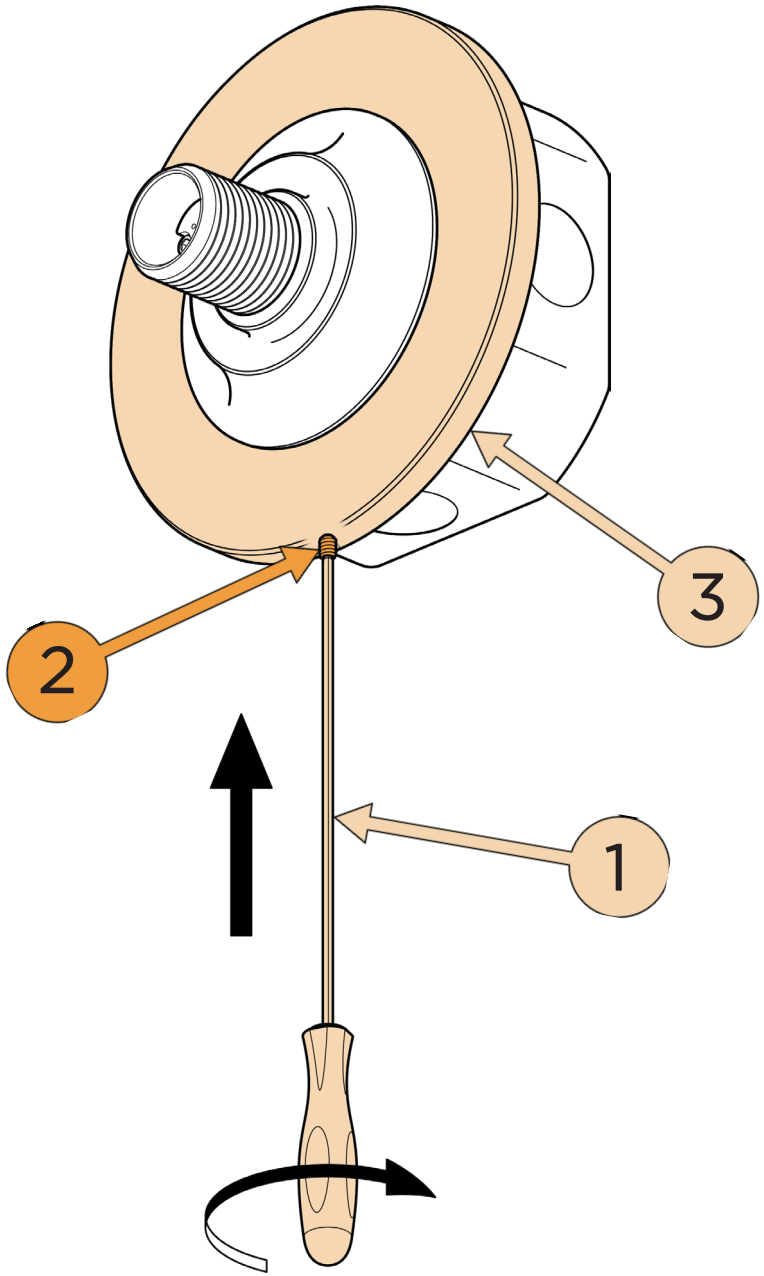

7

Place the **shade** (1)
over the **socket cover** (2)
and hold in place.

Screw the **adapter** (3)
onto the **socket cover** (2)
to secure the **shade** (1) into place.

*Align threads properly for a smooth rotation before twisting to avoid jamming.
Do not overtighten the adapter.

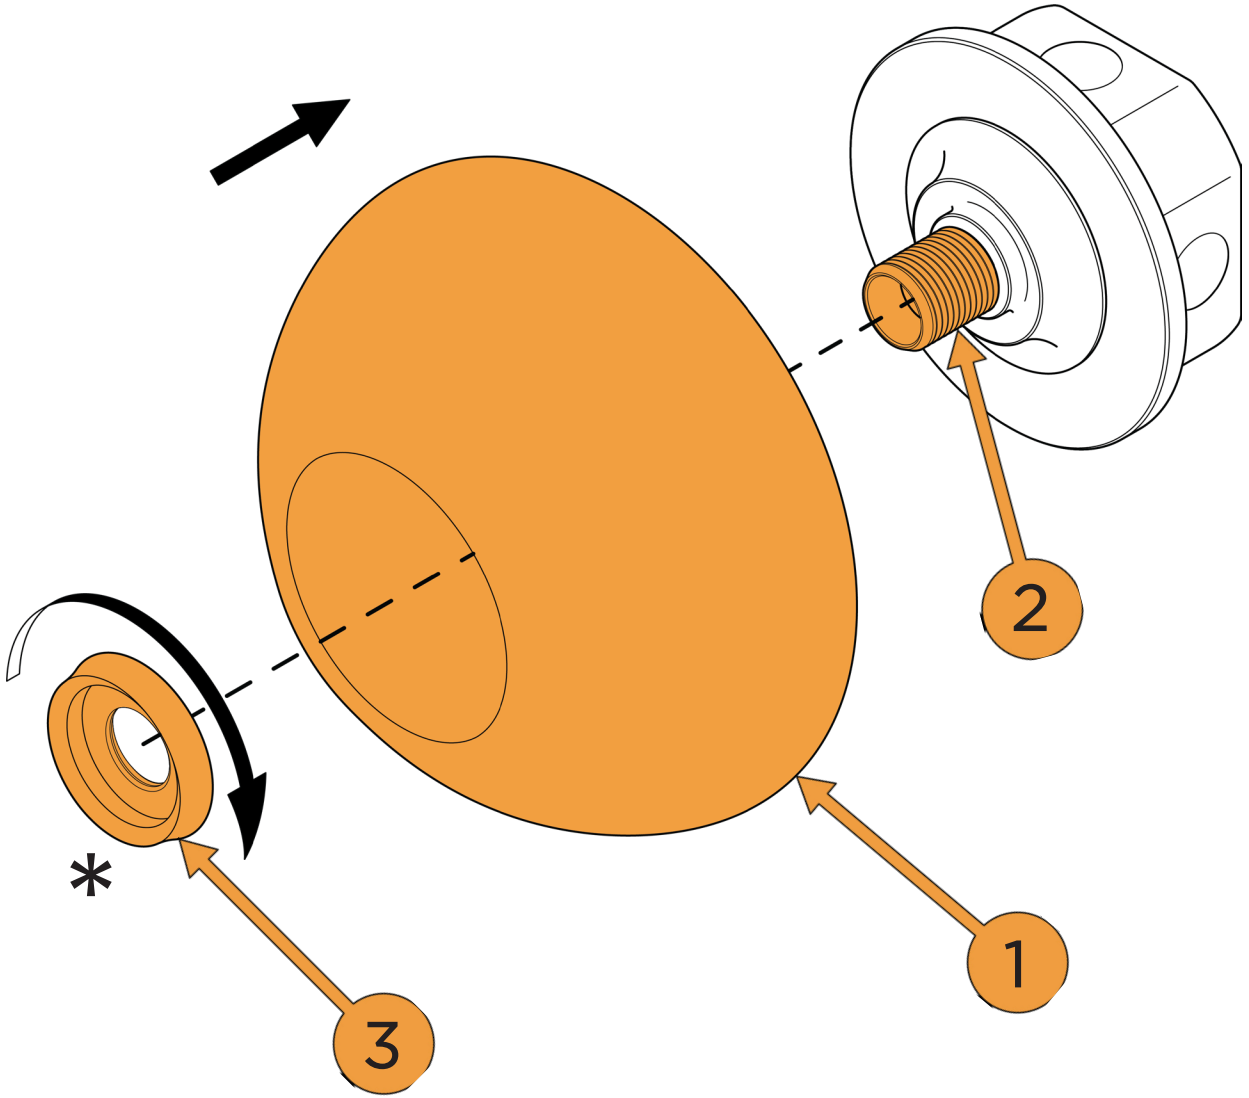

8

Insert the **light bulb** (1)
into the **fixture socket** (2)

*Align pins with pin holes,
then push in.

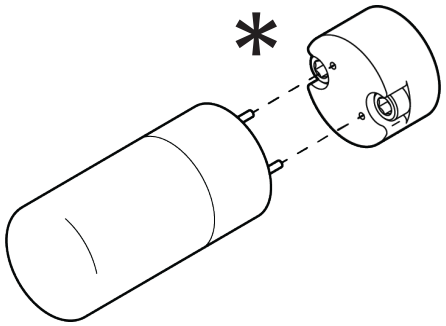

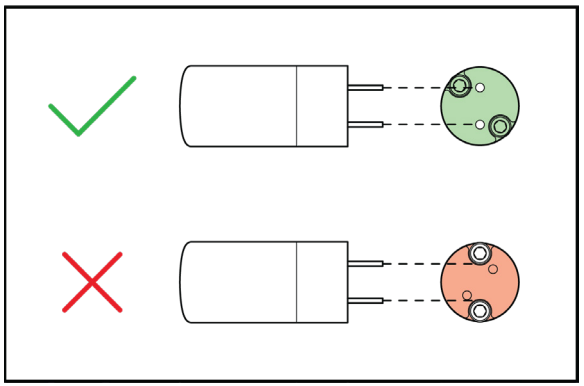

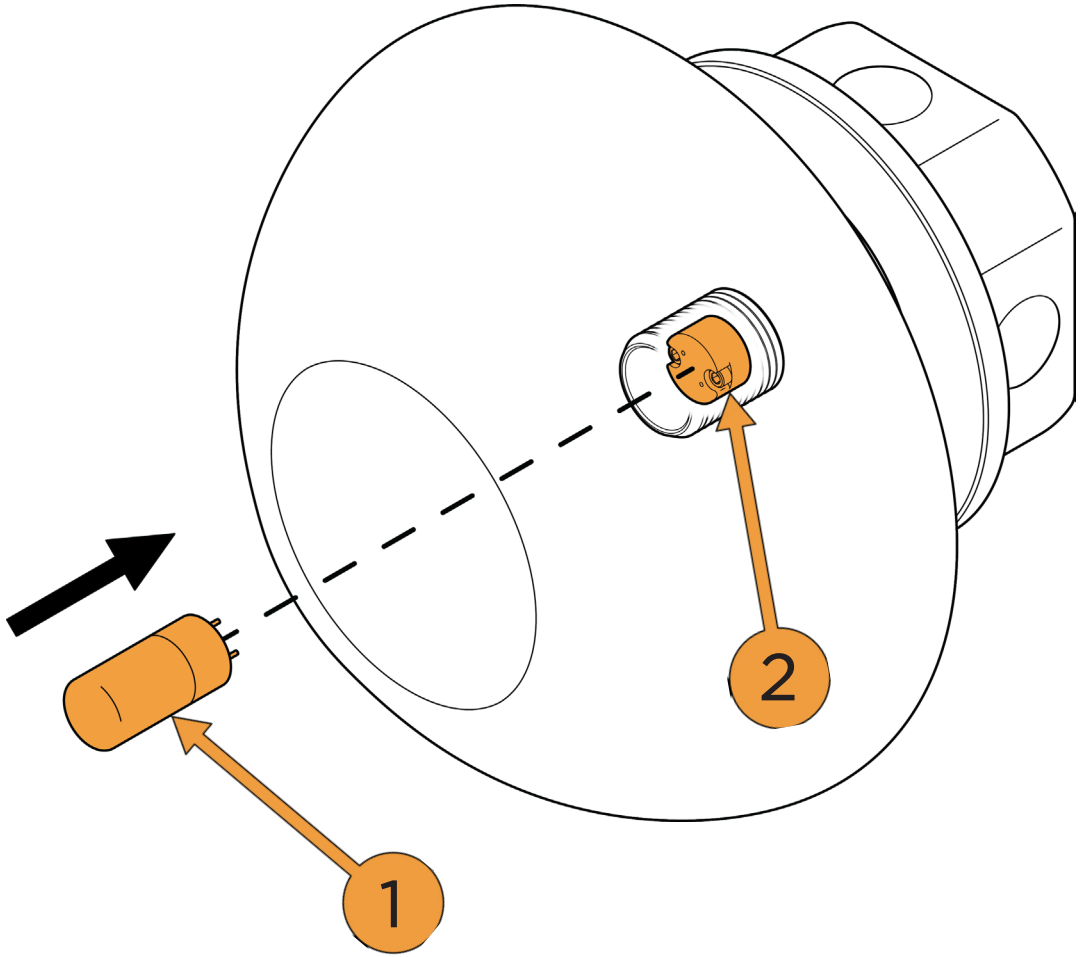

9

Screw the **glass** (1)
onto the **socket cover** (2)

*Align threads properly for a smooth rotation before twisting to avoid jamming. **Do not overtighten the glass.**
*NOTE: Carefully insert the glass by tilting the glass to a downward angle, and then tilting again to an upward angle to screw the glass onto the socket cover.

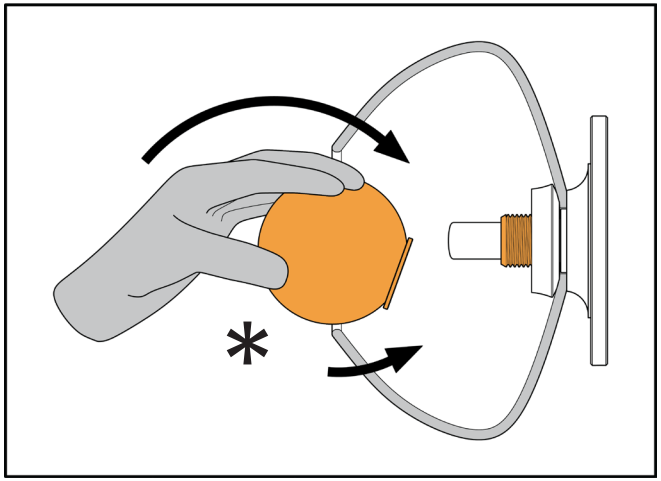

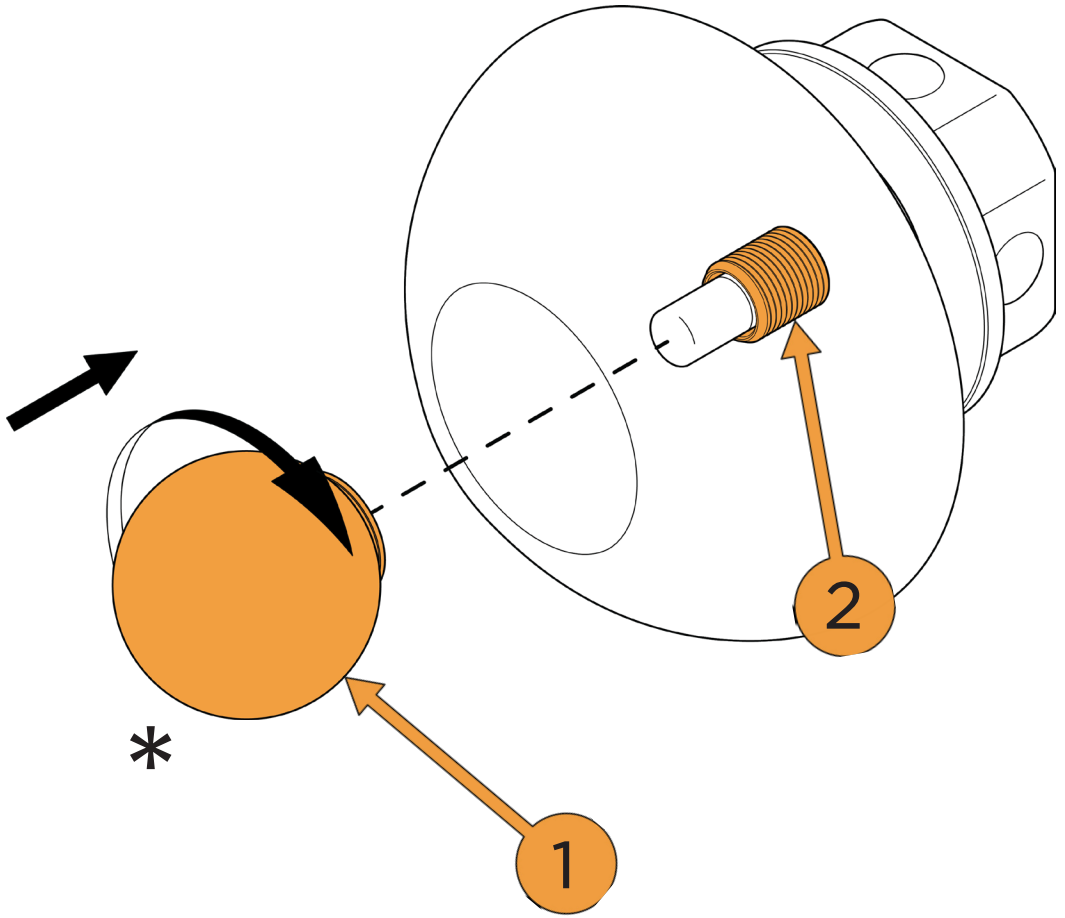

ALLIED MAKER

MADE IN NEW YORK

Molten Sconce

Bulb Replacement
Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included

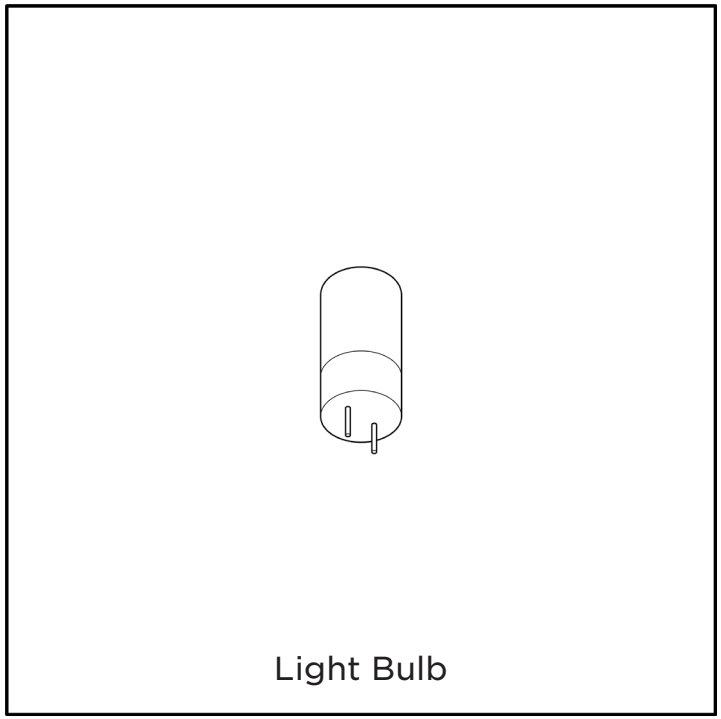

Light Bulb

1

Remove the **glass** (1)

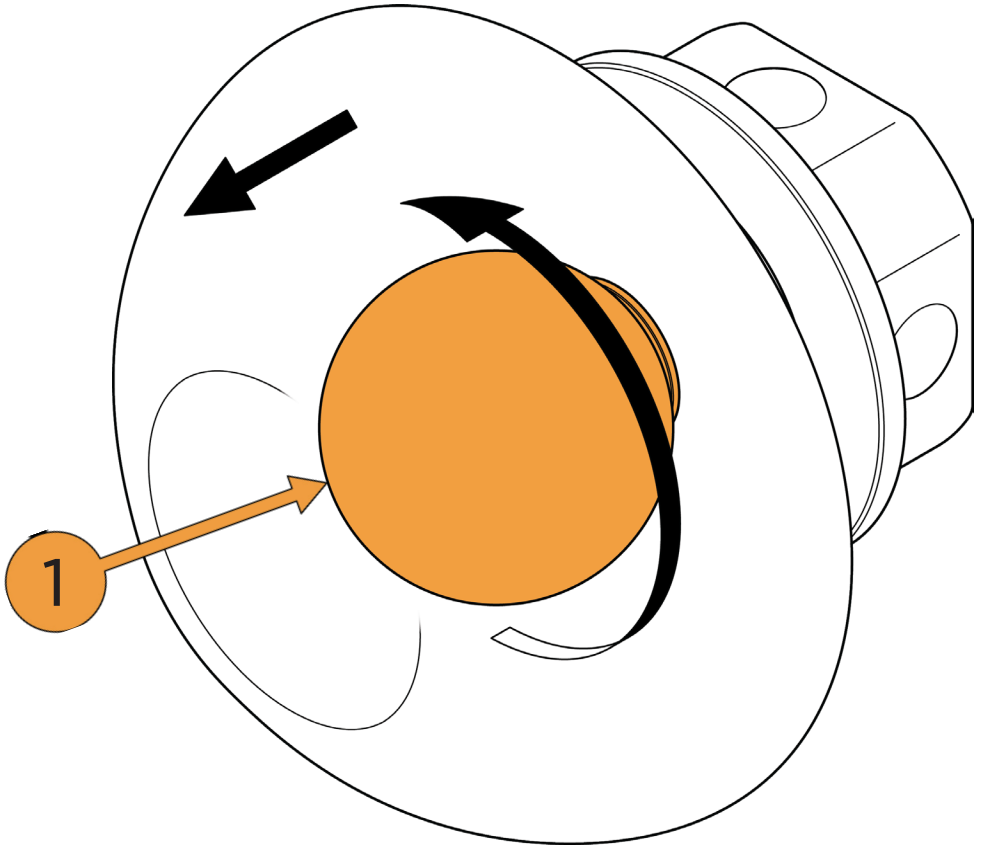

2

Remove the **light bulb** (1)
from the **fixture socket** (2)

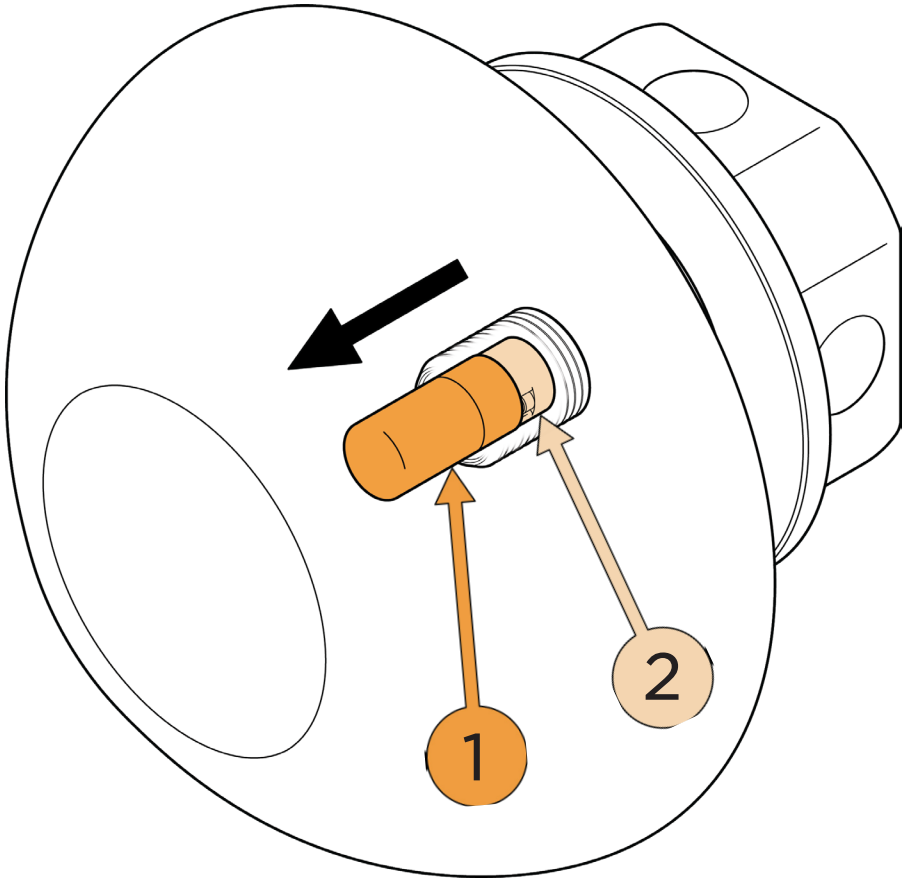

3

Insert the replacement **light bulb** (1)
into the **fixture socket** (2)

*Align pins with pin holes, then push in.

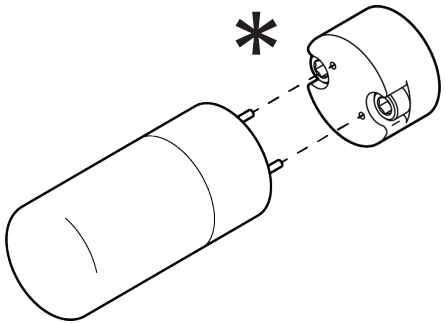

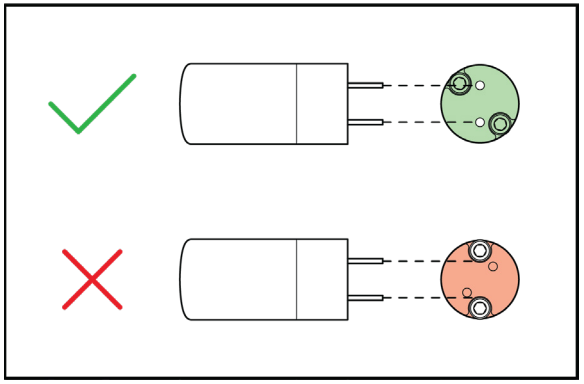

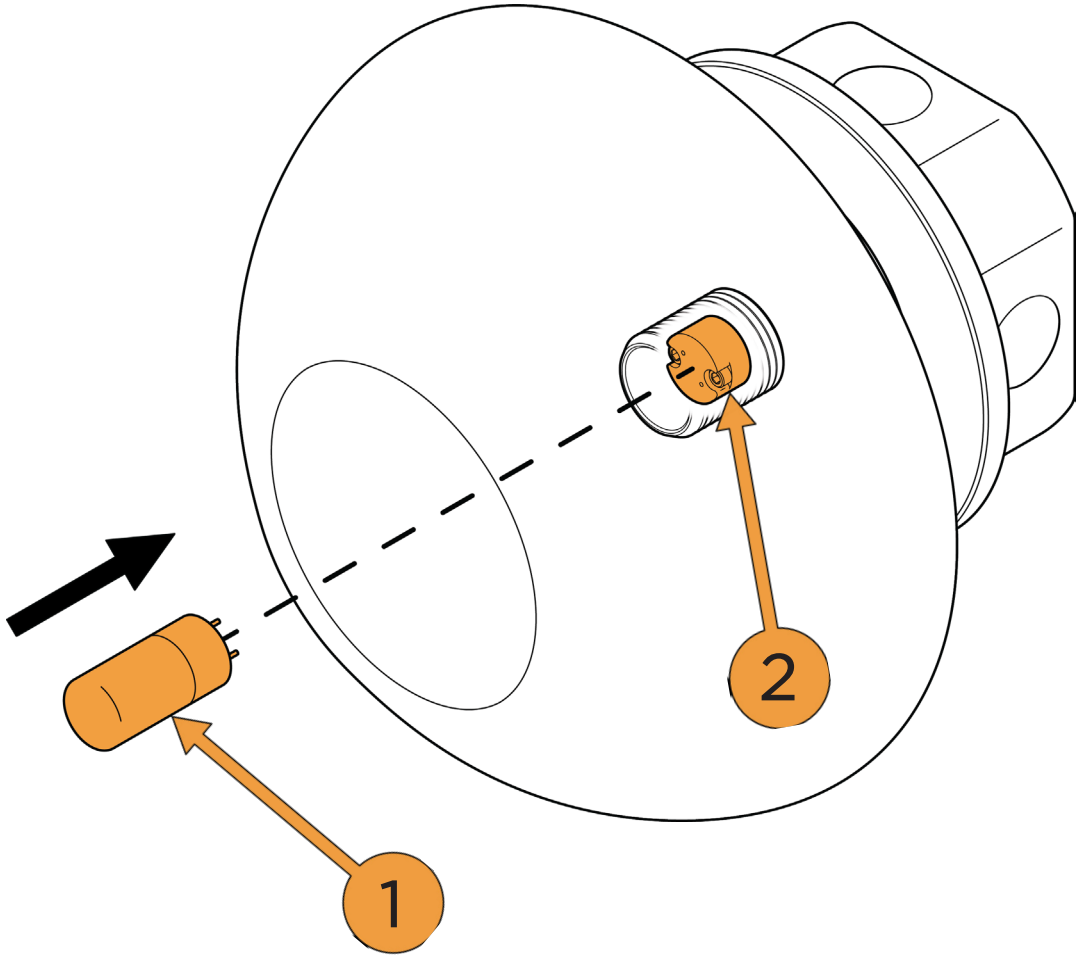

4

Screw the **glass** ①
onto the **socket cover** ②
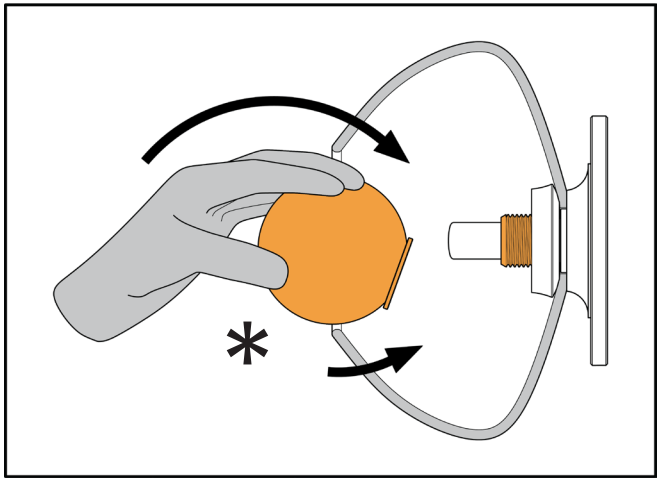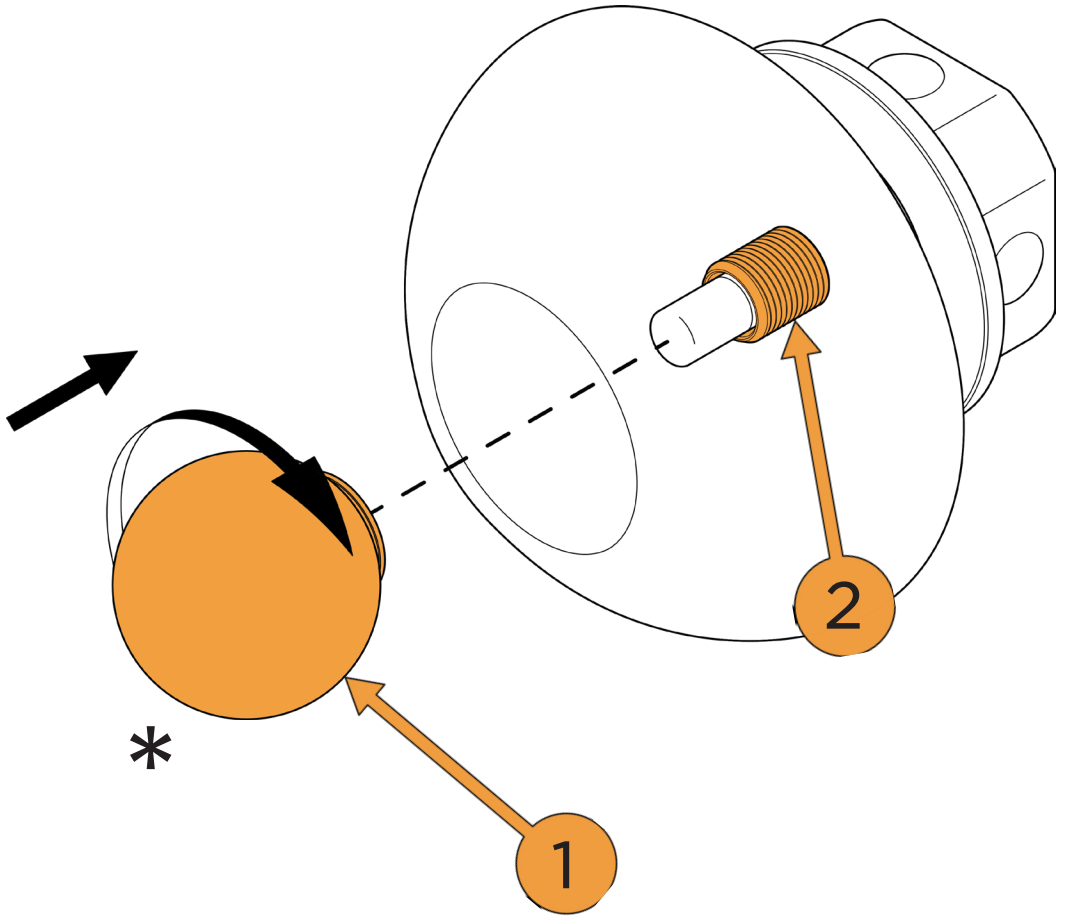
*Align threads properly for a smooth rotation before twisting to avoid jamming. **Do not overtighten the glass.**
*NOTE: Carefully insert the glass by tilting the glass to a downward angle, and then tilting again to an upward angle to screw the glass onto the socket cover.