ALLIED MAKER

MADE IN NEW YORK

Molten Bloom 5

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included



Lighting Fixture



Canopy



2x Phillips Screw

1/16 Hex Driver

Hang Tube



5x Light Bulb



5x Shade

5x Glass

1

Remove the five **adapters** (1)
from the **socket covers** (2)

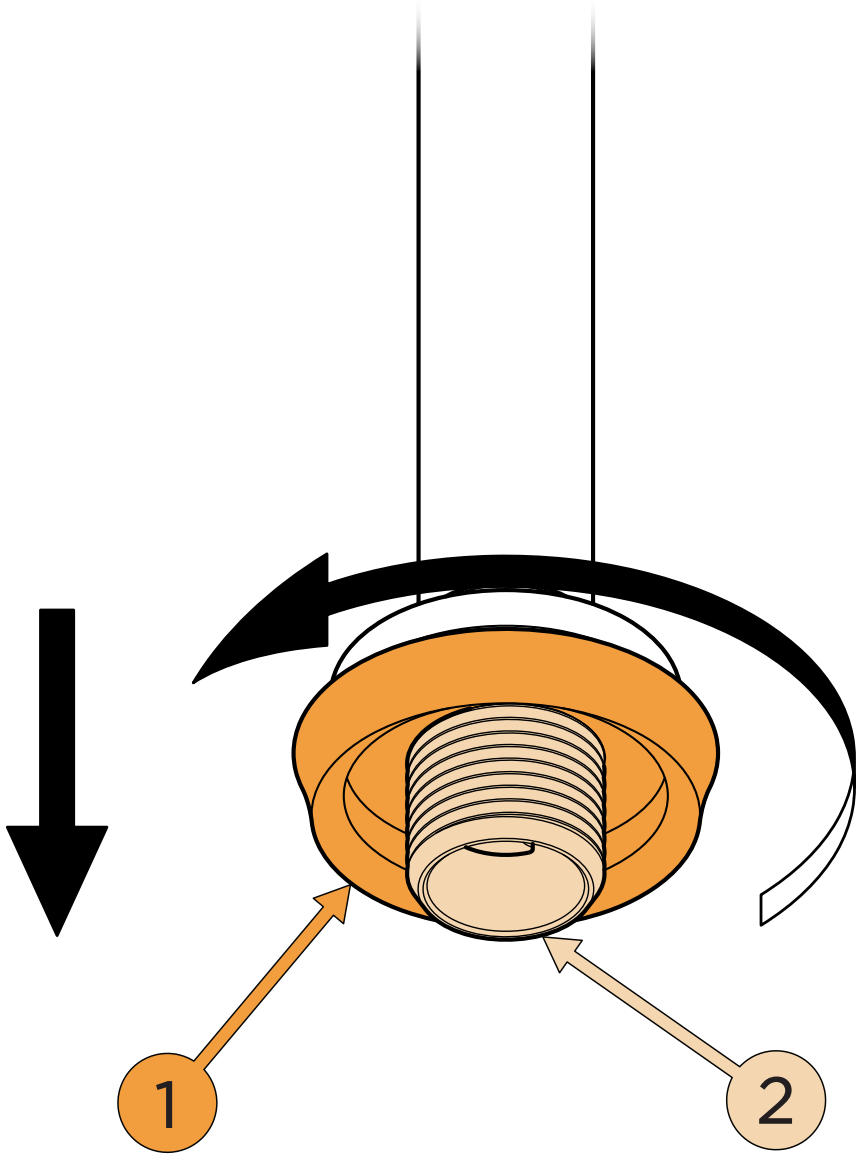

2

Using the provided **hex driver** (1)
loosen the **set screw** (2)
from the **canopy** (3)

Remove the **backplate** (4)

Remove the **lock ring** (5)
and **ball stop** (6)

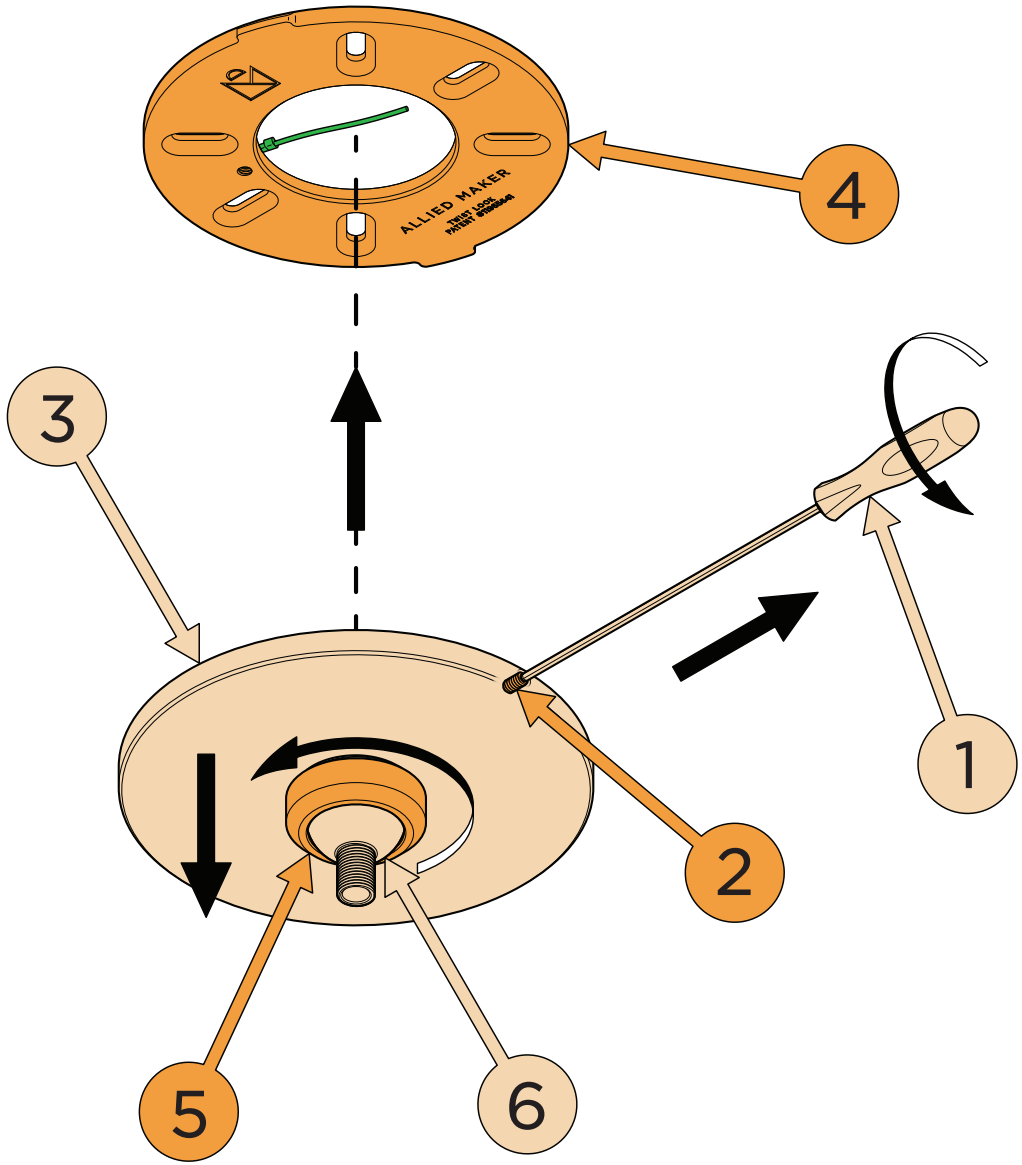

3

Mount the **backplate** (1) onto the **junction box** (2) using the provided **phillips screws** (3)

NOTE: Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

CAUTION: Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

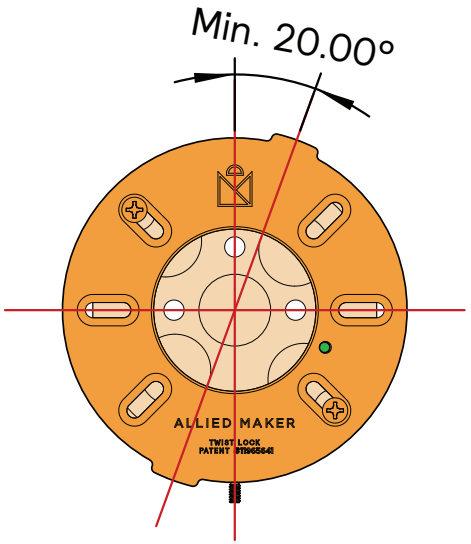

Do Not Overtighten
Phillips Screws

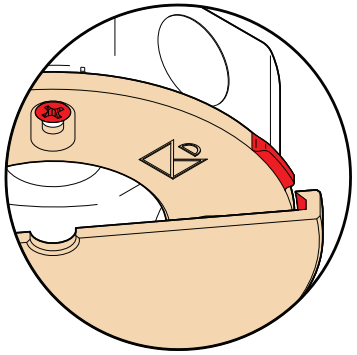

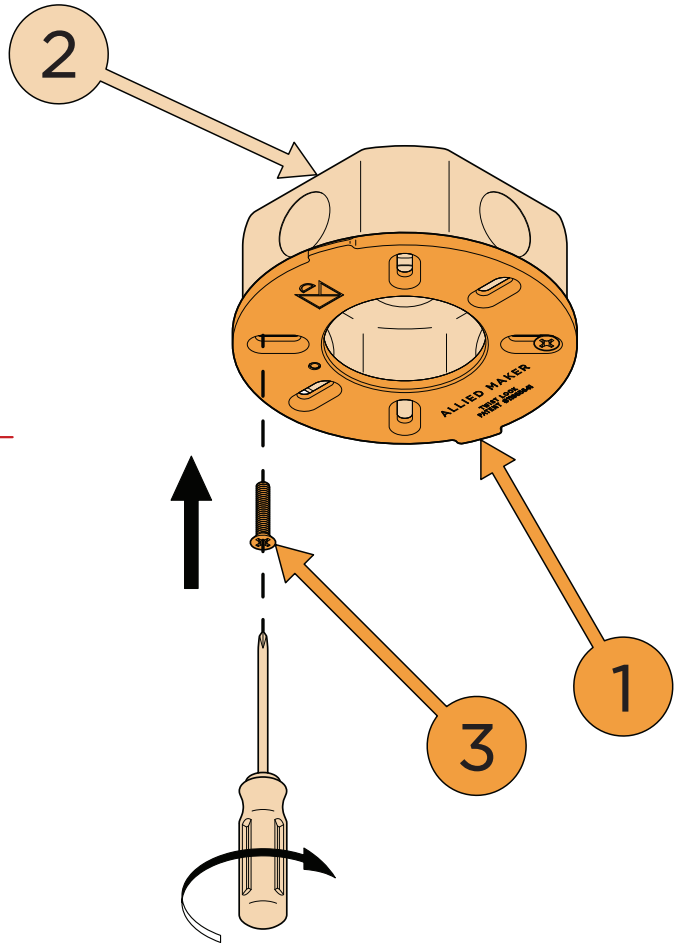

4

Connect the ground wire from the **junction box** (1) with the ground wire from the **backplate** (2) using a **wire nut** (3)

Travel the wires from the **junction box** (1) through the **canopy** (4)

Align the tabs on the **backplate** (2) with the tab openings on the **canopy** (4)

Place the **canopy** (4) over the **backplate** (2) and rotate the **canopy** (4) to the desired position.

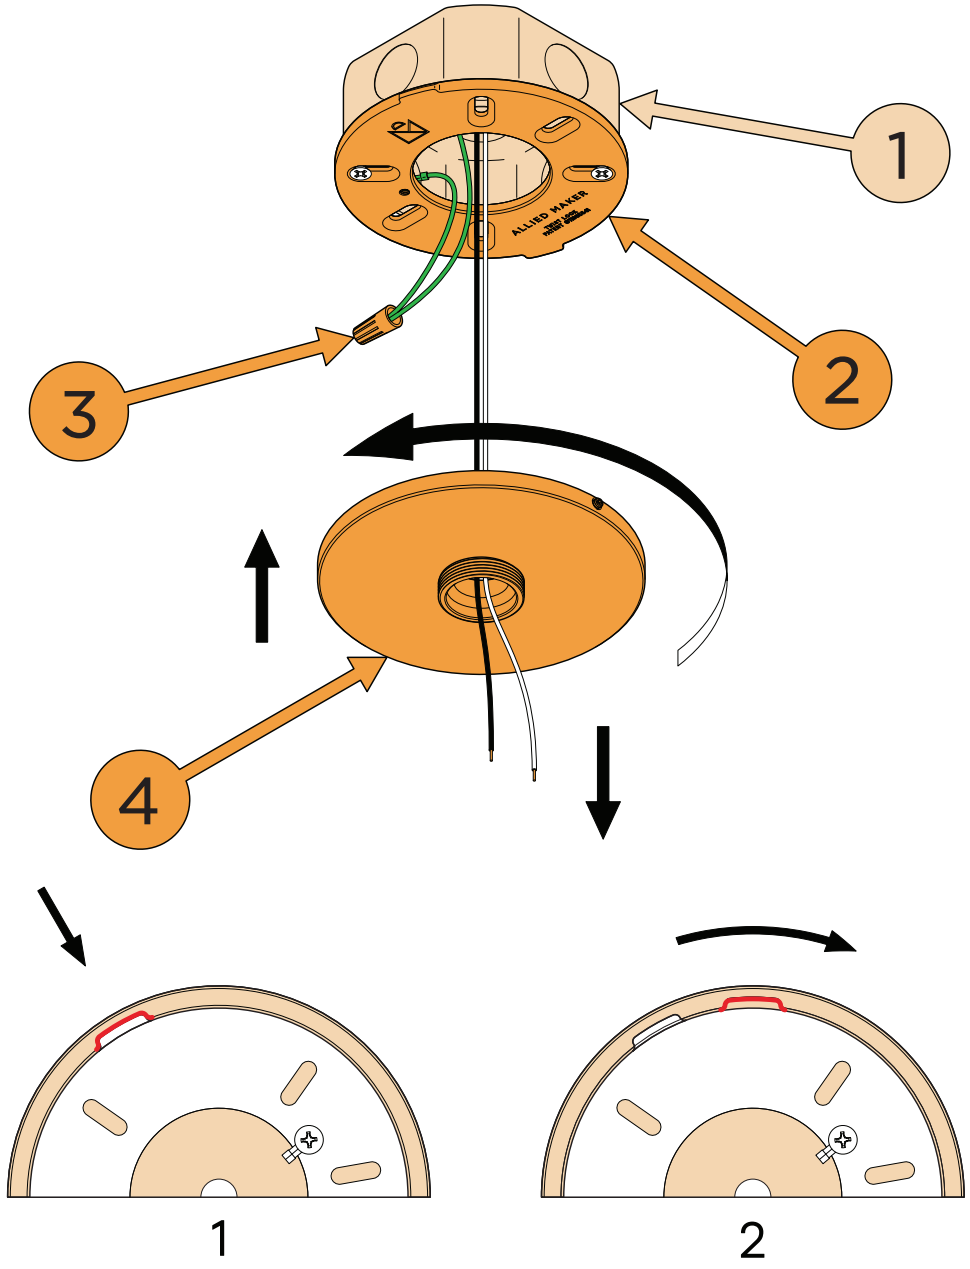

5

Using the provided **1/16 hex driver** (1)
tighten the **set screw** (2)
in the **canopy** (3)
to secure the **canopy** (3)
into place.

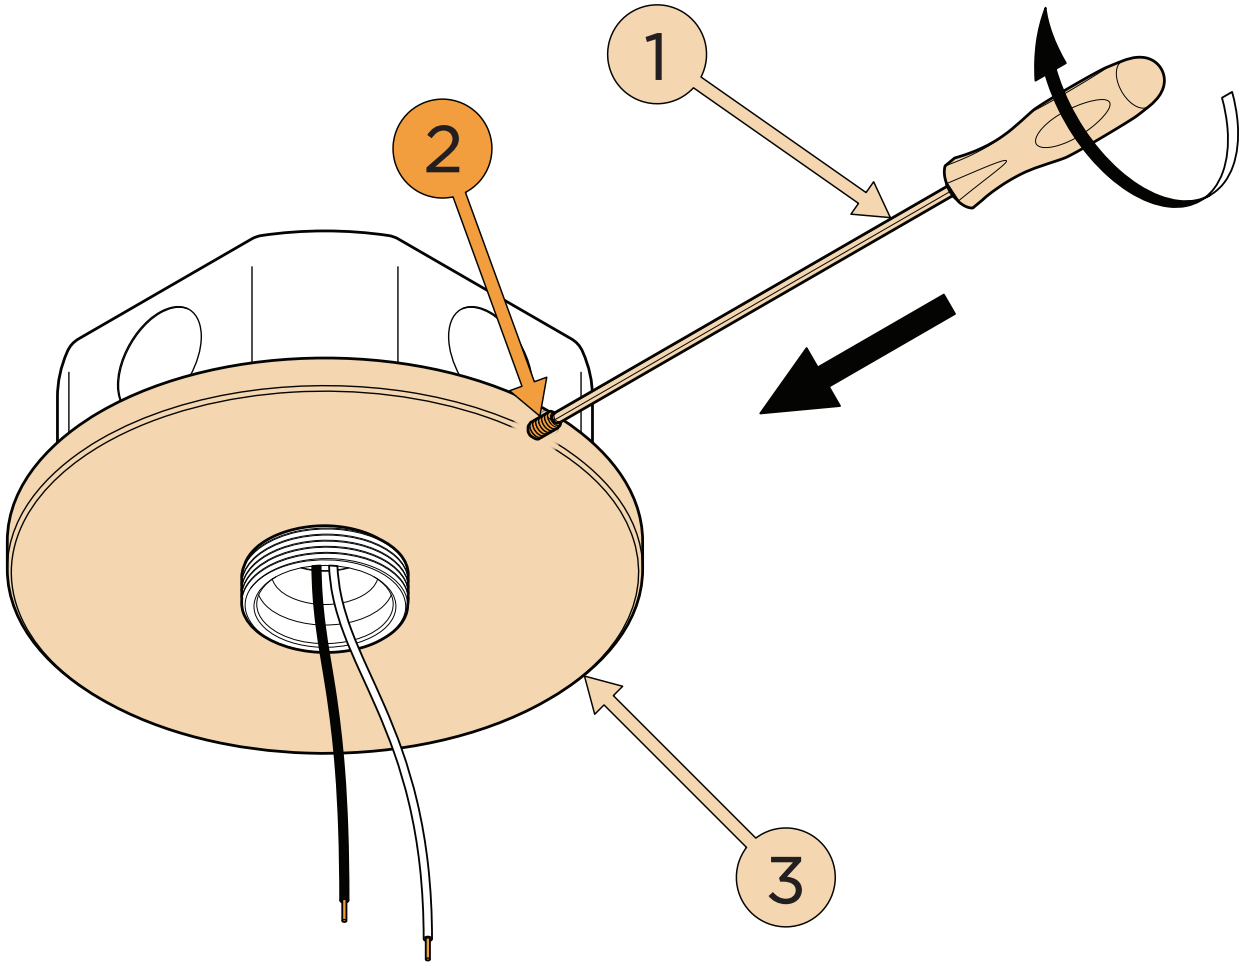

6

Travel the wires from the **lighting fixture** (1)
through the **hang tube** (2)

Screw the **hang tube** (2)
onto the **lighting fixture** (1)

Continue to travel the wires through the
lock ring (3) and then the **ball stop** (4)

Screw the **ball stop** (4)
onto the **hang tube** (2)

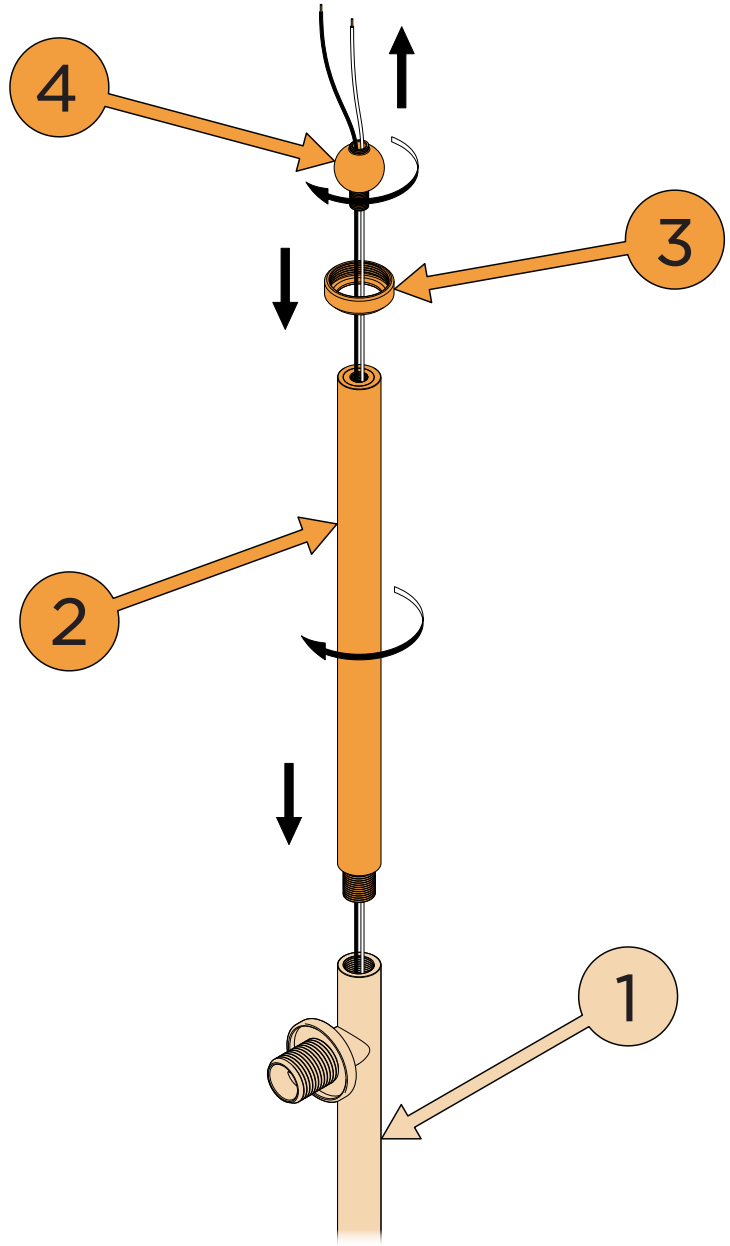

7

Connect the wires from the lighting fixture with the wires from the **junction box** (1) using **wire nuts** (2)

Insert the **ball stop** (3) into the **adapter** (4) and hold in place.

Carry the **lock ring** (5) up the **hang tube** (6) and screw the **lock ring** (5) onto the **adapter** (4) to secure the lighting fixture into place.

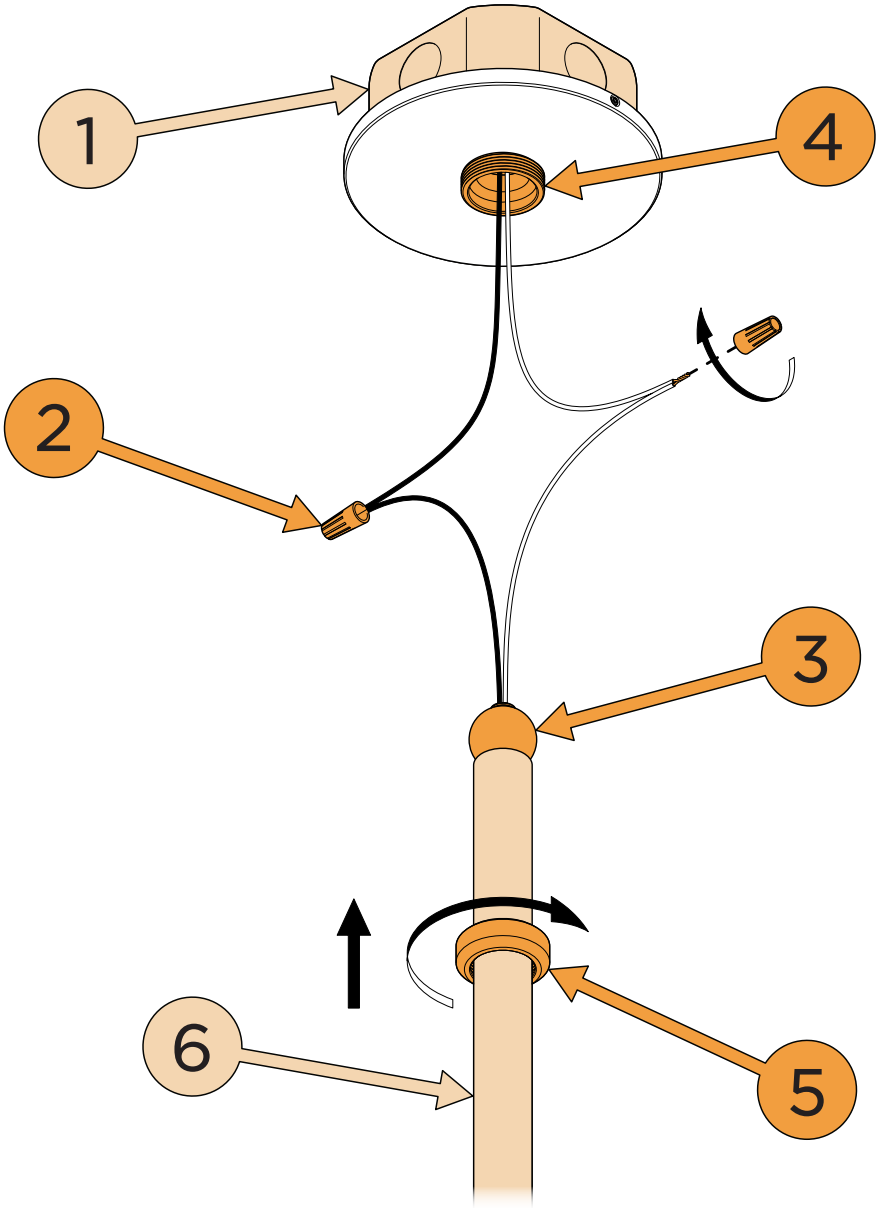

8

Place the five **shades** (1)
over the **socket covers** (2)
and hold in place.

Screw the five **adapters** (3)
onto the **socket covers** (2)
to secure the **shades** (1) into place.

*Align threads properly for a smooth rotation before twisting to avoid jamming.
Do not overtighten the adapter.

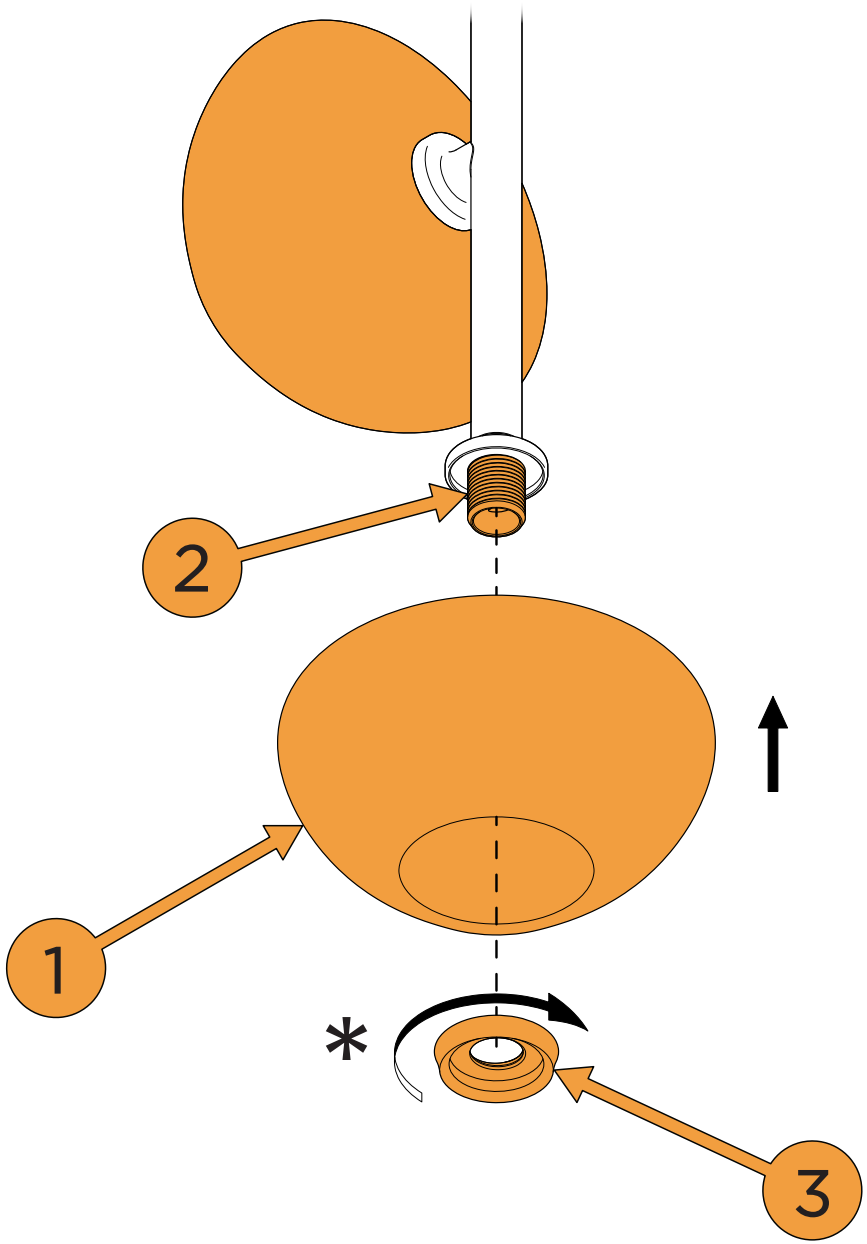

9

Insert the five **light bulbs** (1)
into the **fixture sockets** (2)

*Align pins with pin holes,
then push in.

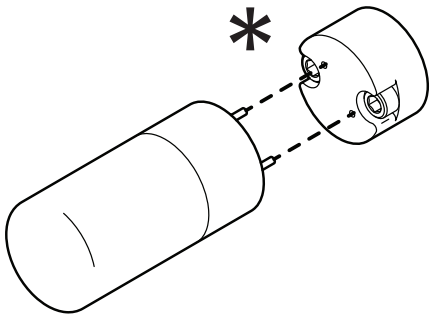

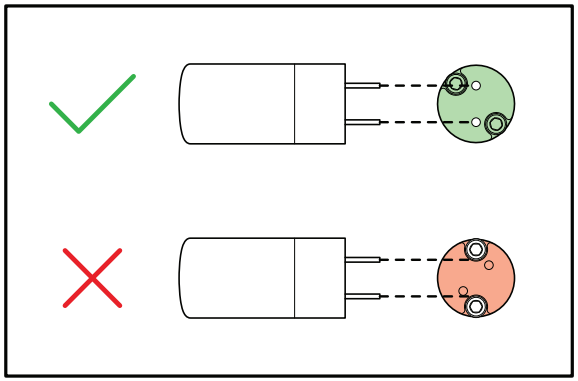

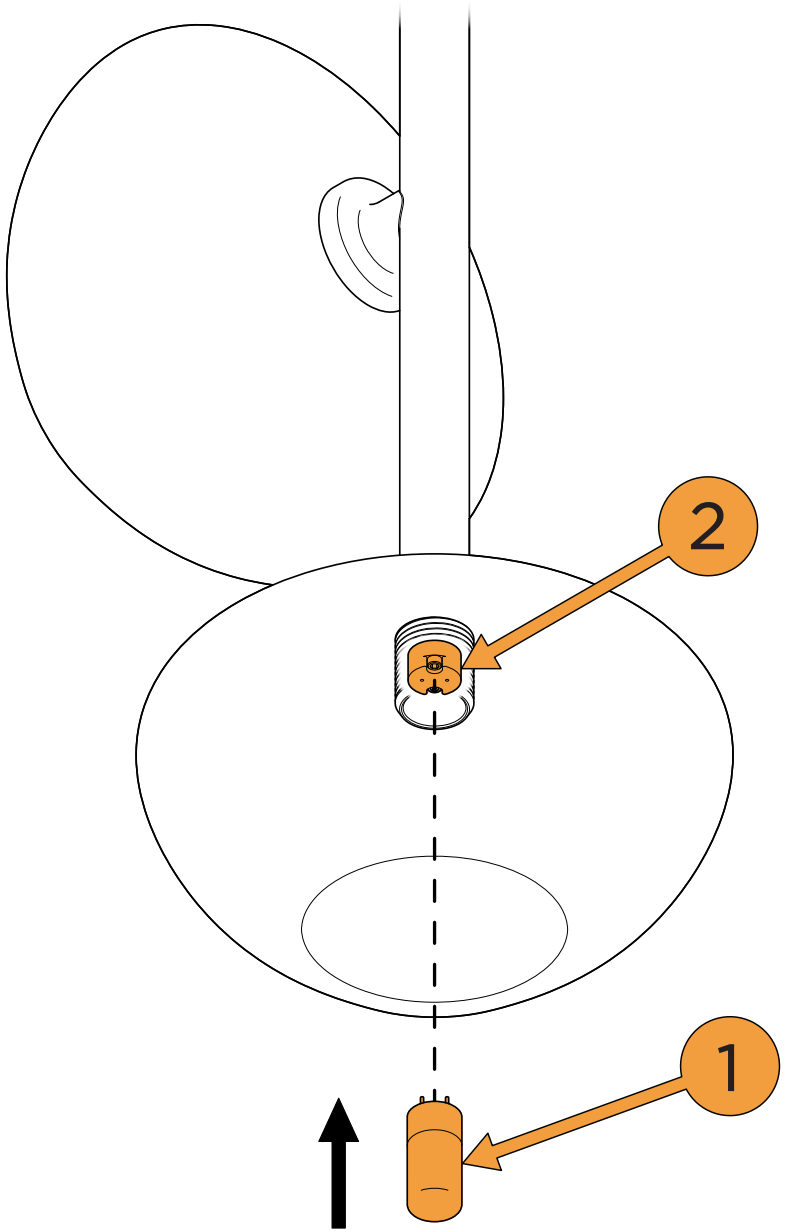

10

Screw the five **glasses** (1)
onto the **socket covers** (2)
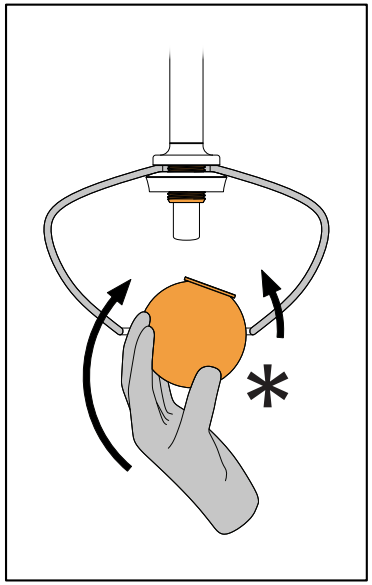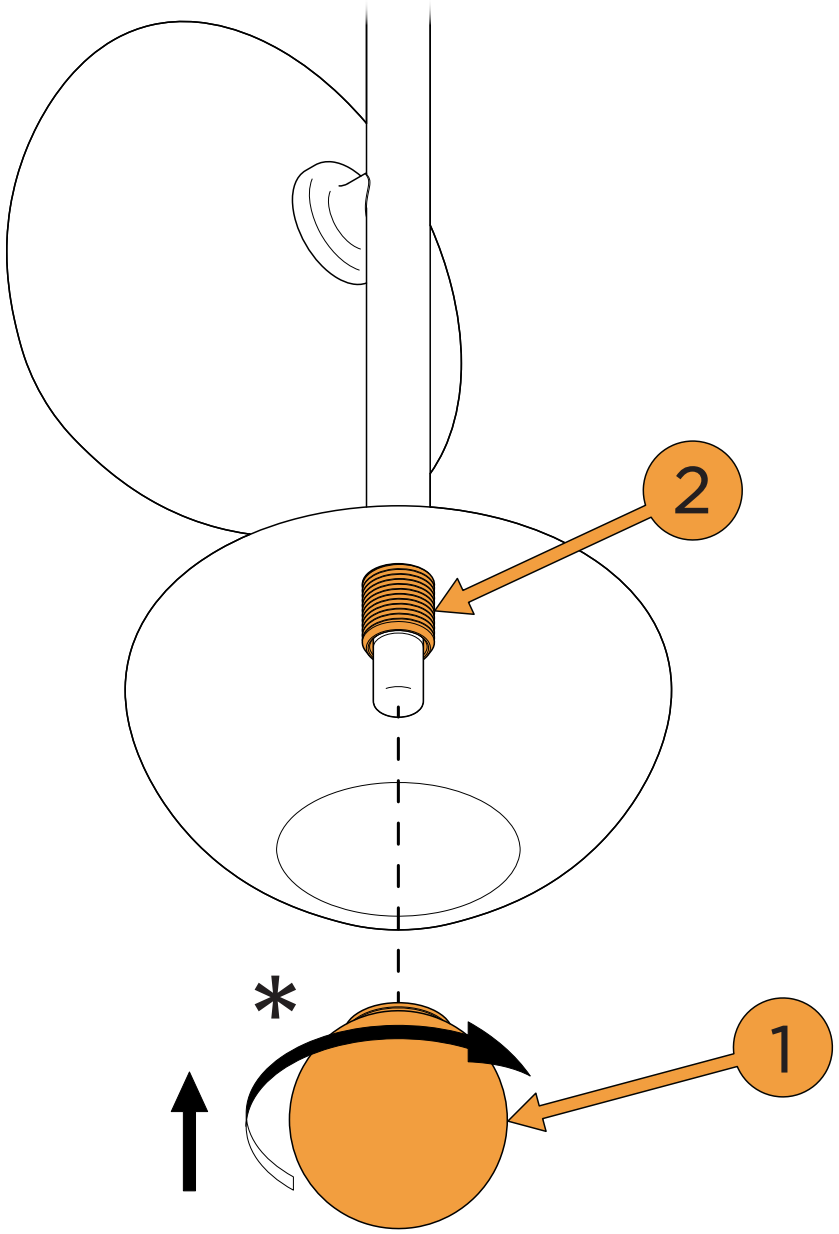
*Align threads properly for a smooth rotation before twisting to avoid jamming. **Do not overtighten the glass.**
*NOTE: Carefully insert the glass by tilting the glass to a downward angle, and then tilting again to an upward angle to screw the glass onto the socket cover.