ALLIED MAKER

MADE IN NEW YORK

Winnow Flush Mount

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included

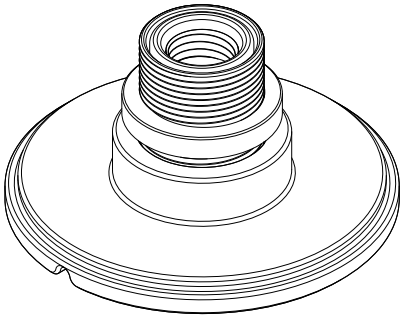

Lighting Fixture



Light Bulb



2x Phillips Screw



Shade

1/16 Hex Driver

1

Using the provided **1/16 hex driver** (1)
loosen the **set screw** (2)
from the **canopy** (3)

Remove the **backplate** (4)

Remove the **lock ring** (5)

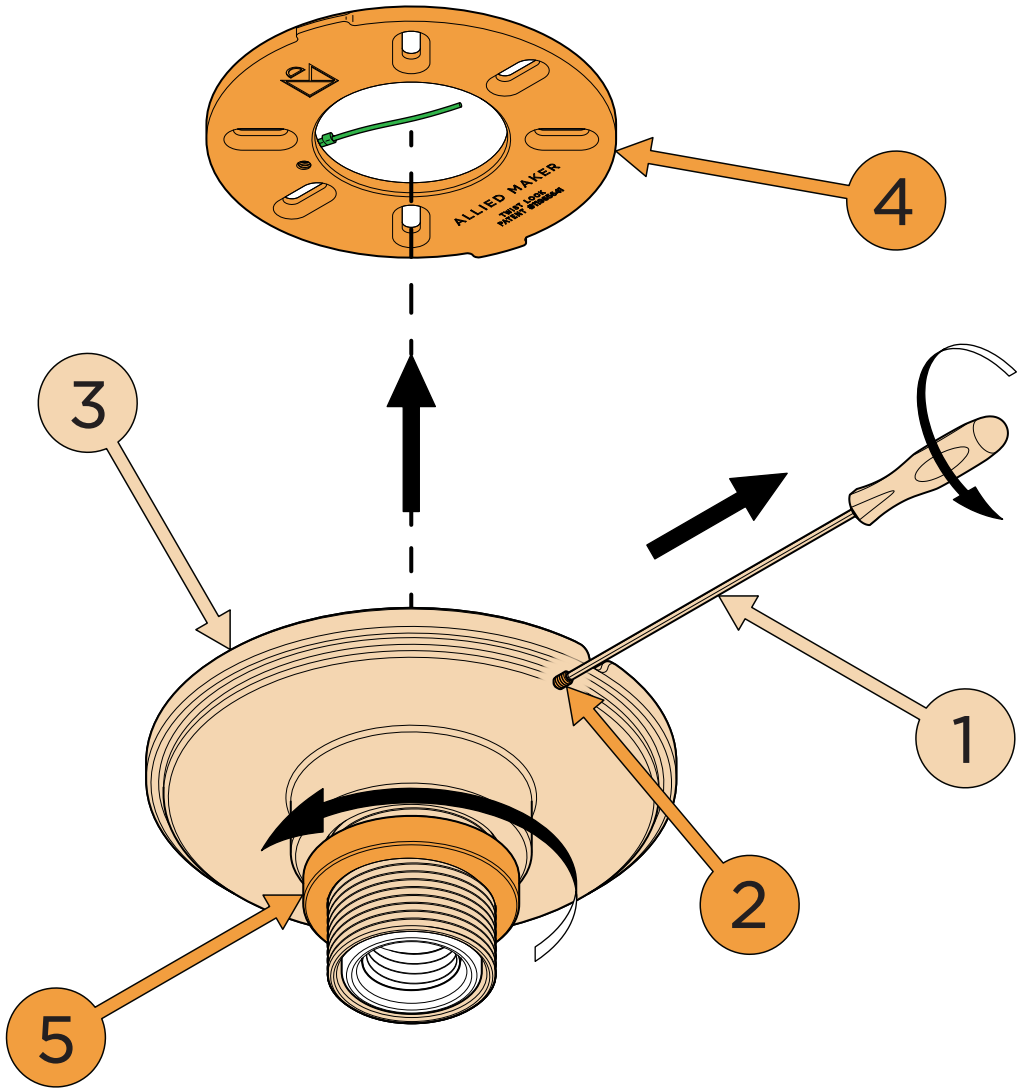

2

Mount the **backplate** (1)
onto the **junction box** (2)
using the provided **phillips screws** (3)

NOTE: Make sure the two tabs on the backplate are rotated to a minimum of 20° from the intended mounting alignment. This will ensure the set screw has enough space to fully secure the canopy and backplate into place.

CAUTION: Do not overtighten the phillips screws. Overtightening will prevent the two tabs on the backplate from engaging with the channel inside the canopy.

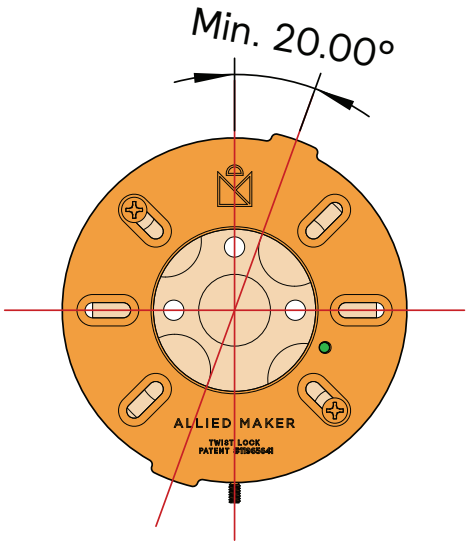

Do Not Overtighten
Phillips Screws

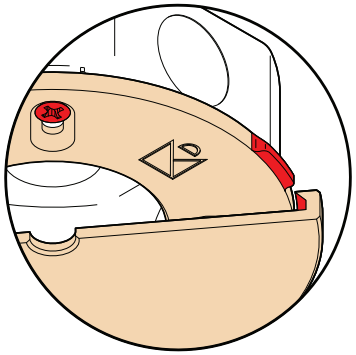

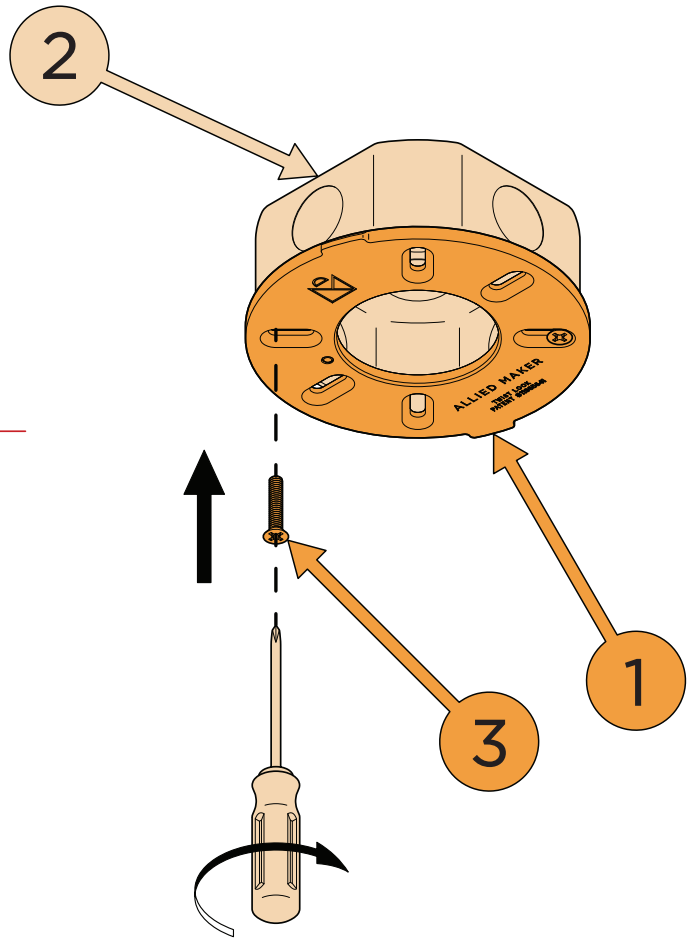

3

Connect the wires
from the **lighting fixture** (1)
with the wires
from the **junction box** (2)
using **wire nuts** (3)

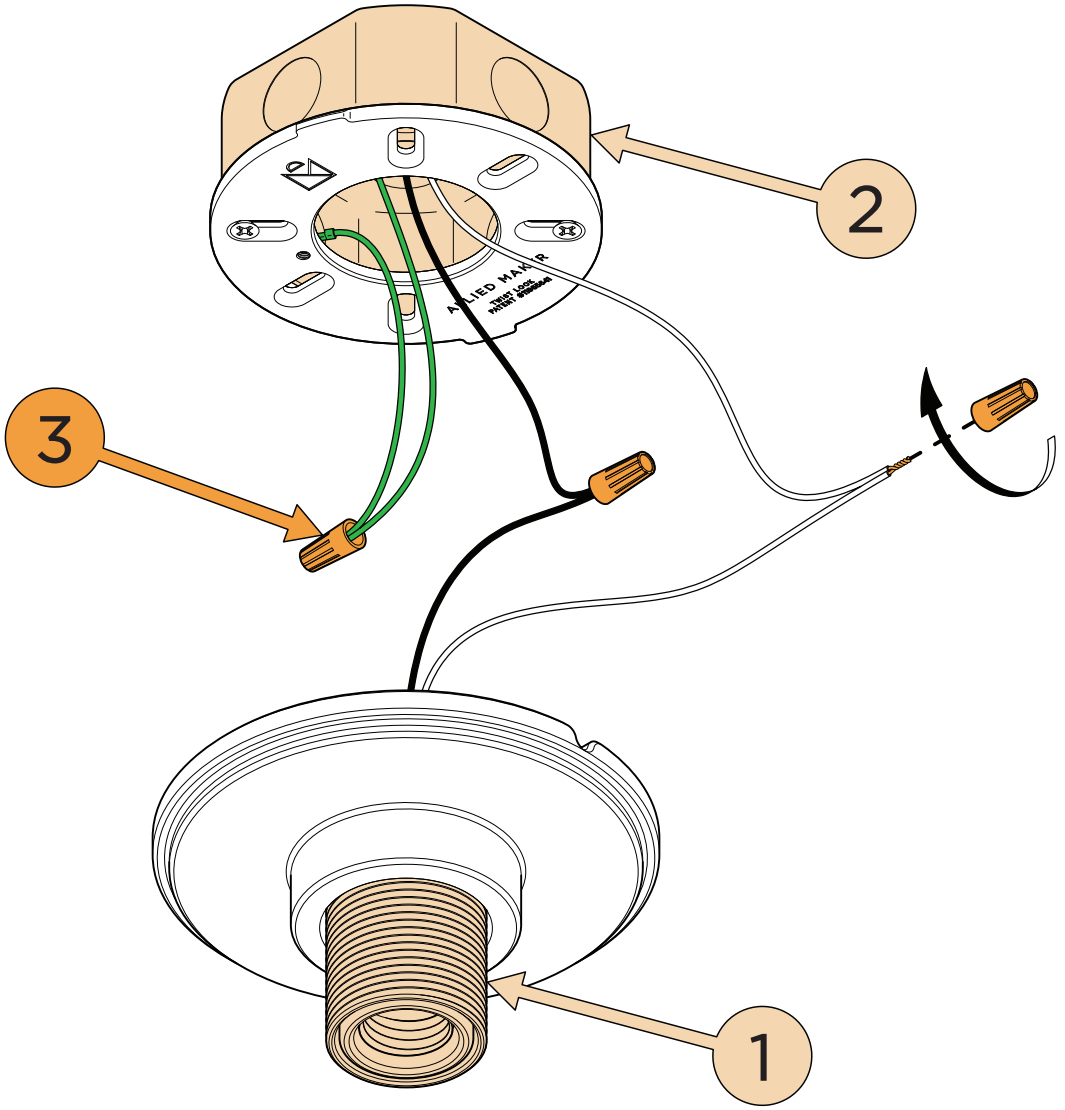

4

Align the tabs on the **backplate** (1)
with the tab openings on the **canopy** (2)

Place the **canopy** (2)
over the **backplate** (1)
and rotate the **canopy** (2)
to the desired position.

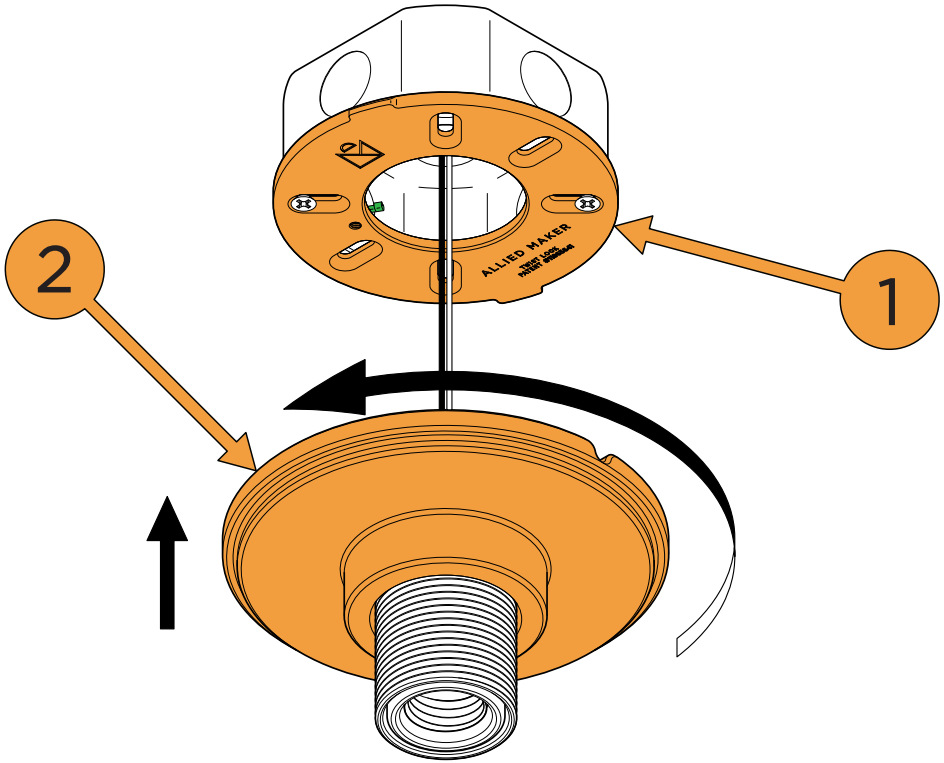

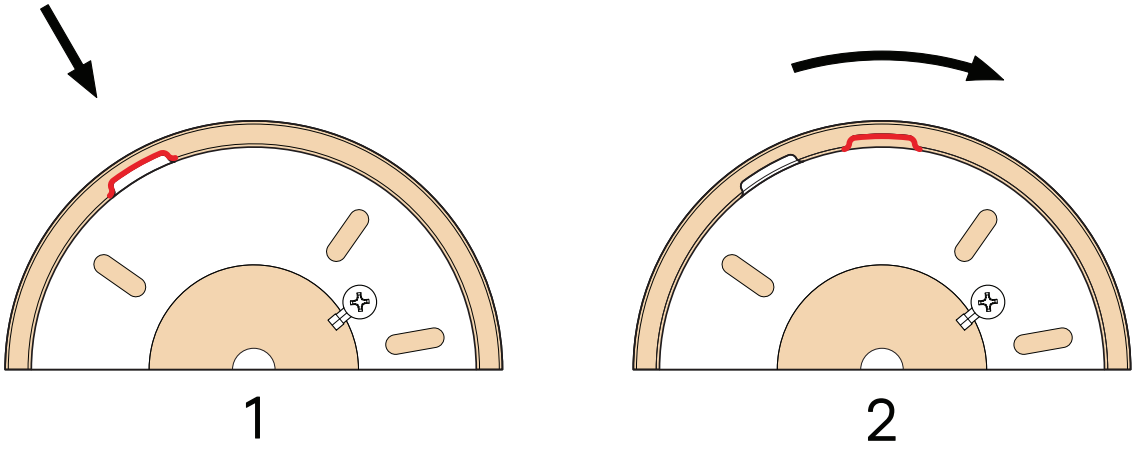

5

Using the provided **1/16 hex driver** (1)
tighten the **set screw** (2)
in the **canopy** (3)
to secure the **canopy** (3)
into place.

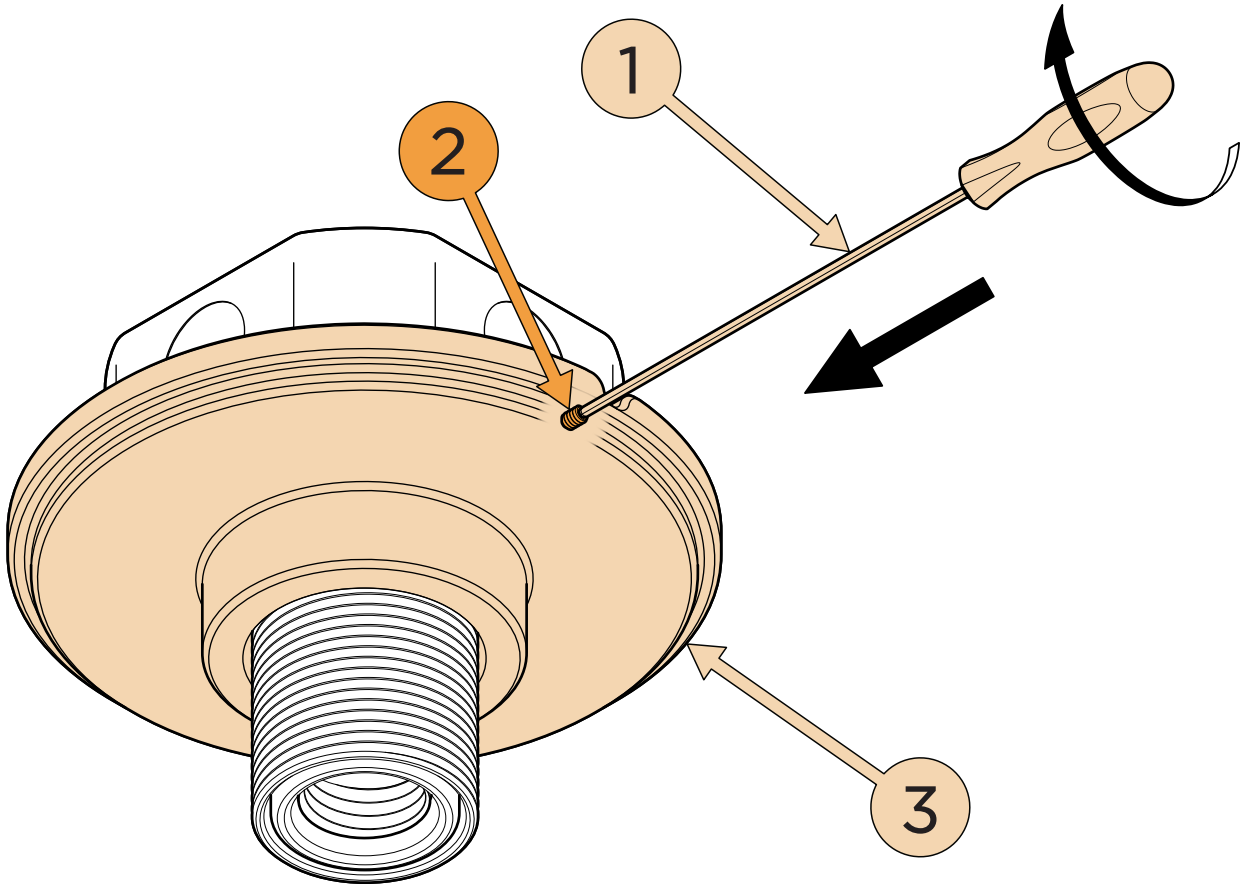

6

Place the **shade** (1)
over the **socket cover** (2)
and hold in place.

Screw the **lock ring** (3)
onto the **socket cover** (2)
to secure the **shade** (1)
into place.

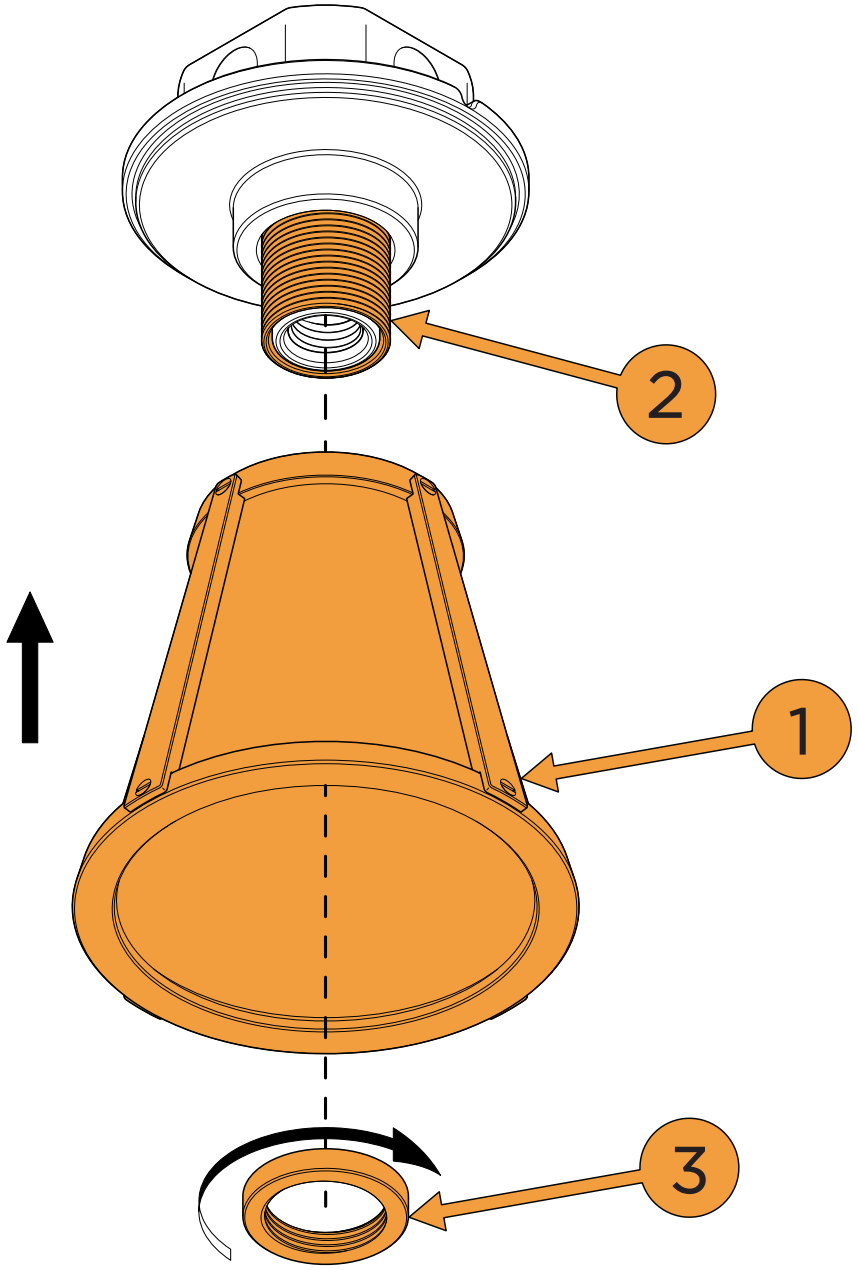

7
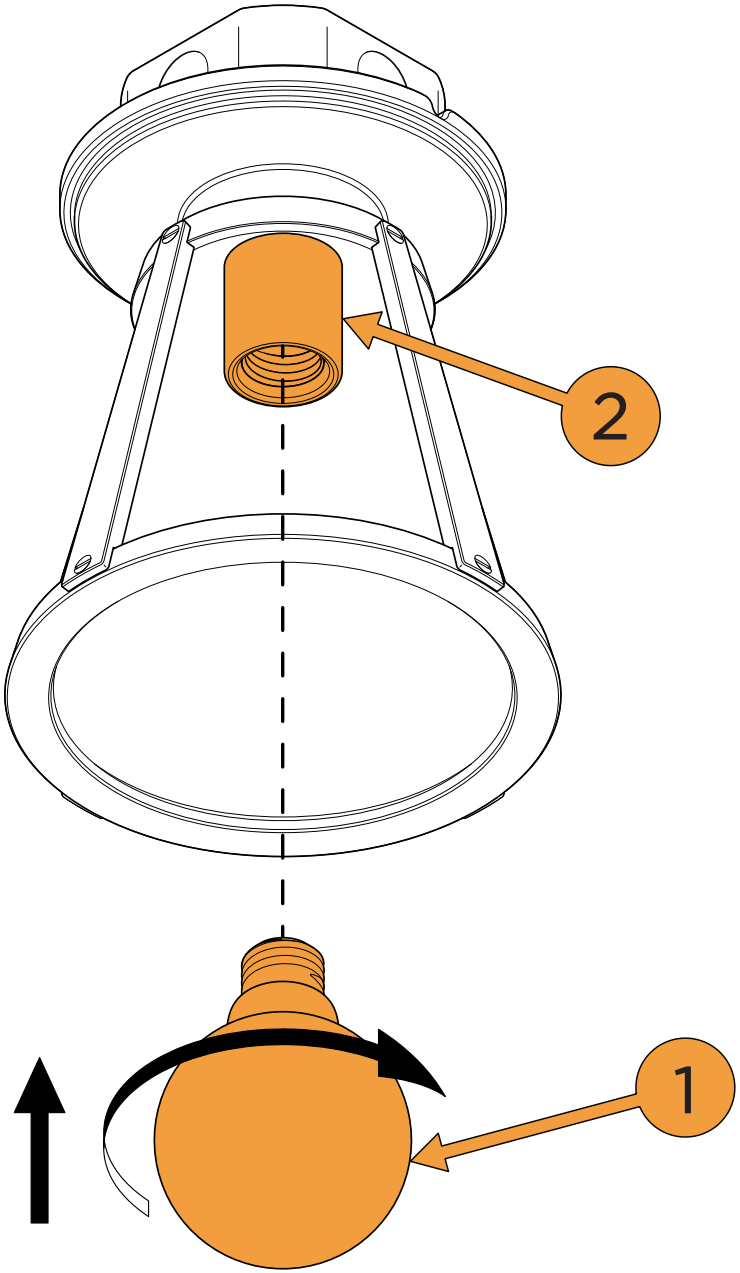
Screw the **light bulb** (1)
into the **fixture socket** (2)