ALLIED MAKER

MADE IN NEW YORK

Ewing Sconce

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included

3x Light Bulb	3x Glass	3x Glass Shade	Shade Screw	2x Phillips Screw	1/8 Hex Key
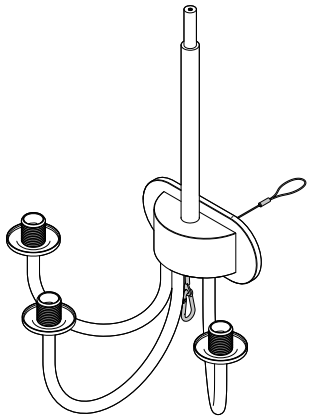 Lighting Fixture		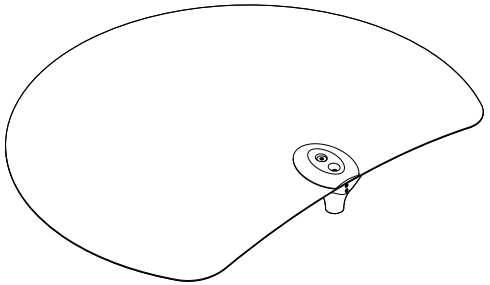 Shade			5/64 Hex Driver
					1/16 Hex Driver

1

Using the provided **1/16 hex driver** (1)
loosen the **set screw** (2)
in the **canopy** (3)

Remove the **backplate** (4)

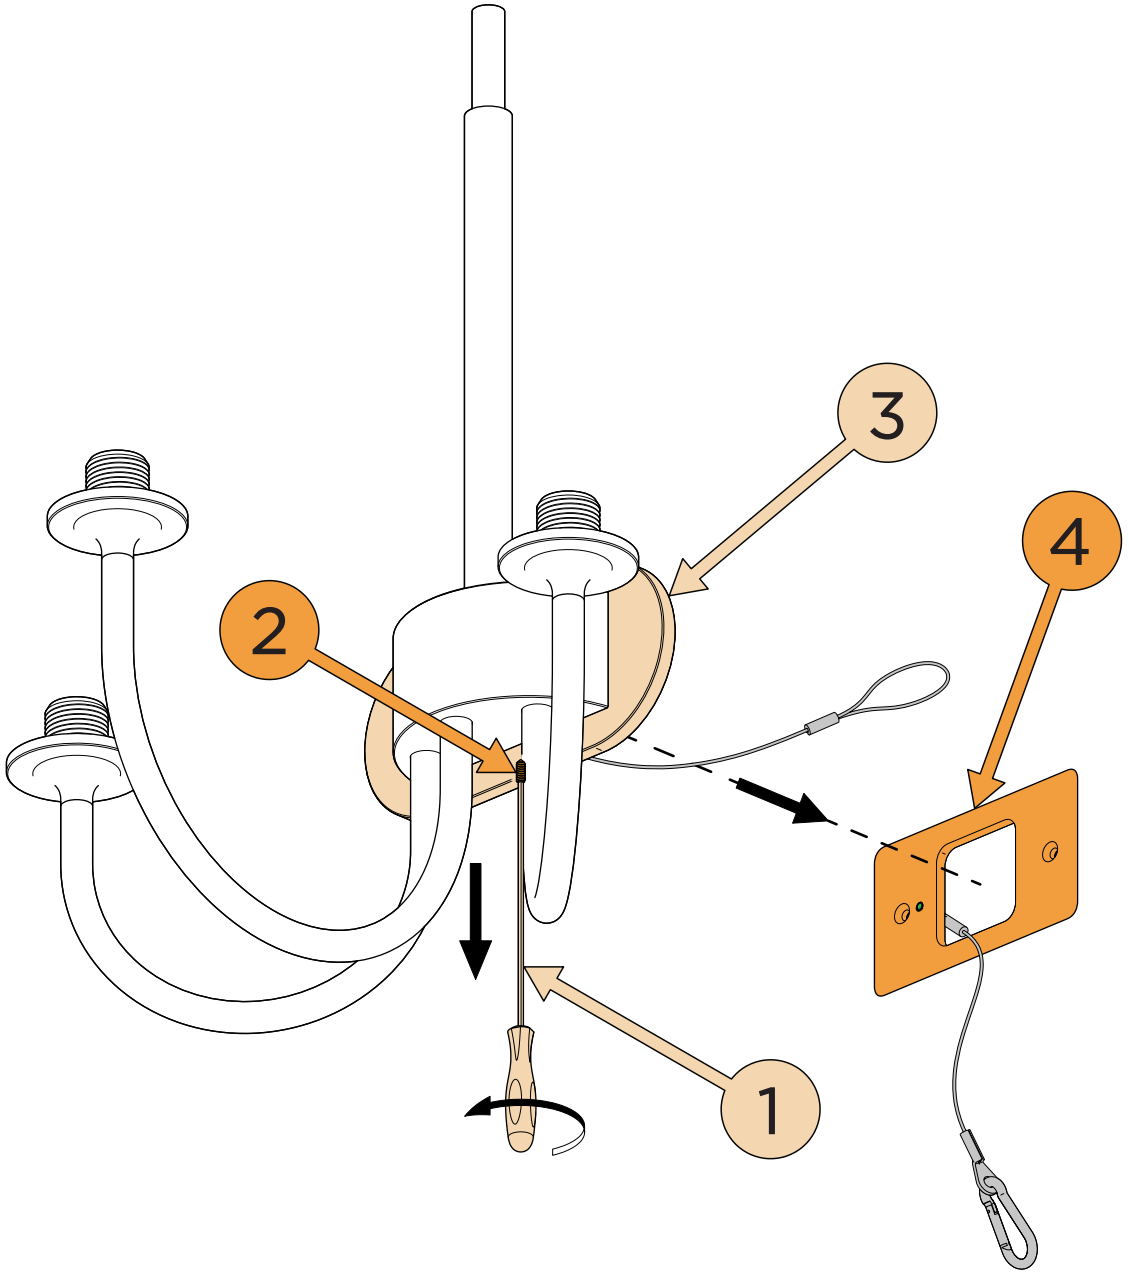

2

Mount the **backplate** (1)
onto the **junction box** (2)
using the provided **phillips screws** (3)

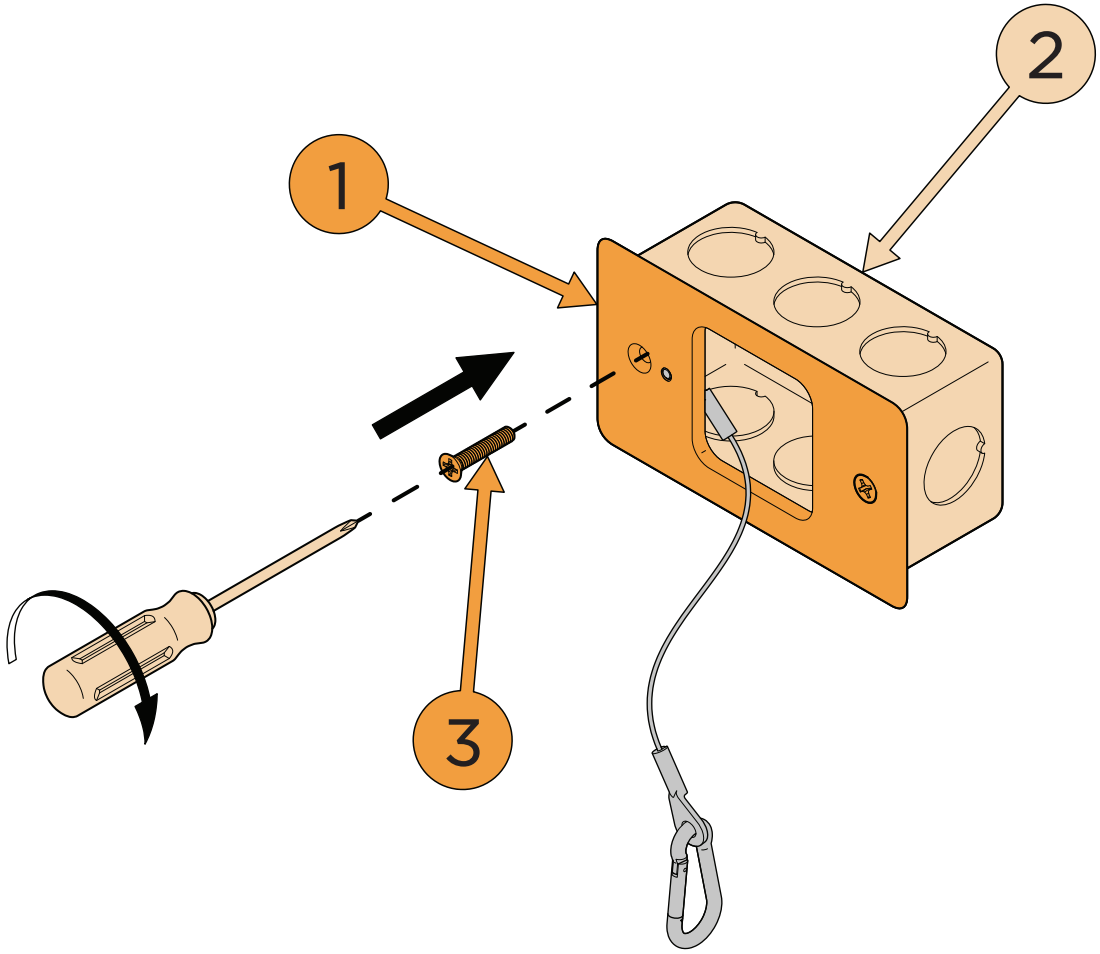

3

Using the provided **5/64 hex driver** (1)
loosen the two **set screws** (2)
in the **adapter** (3)
on the **shade** (4)

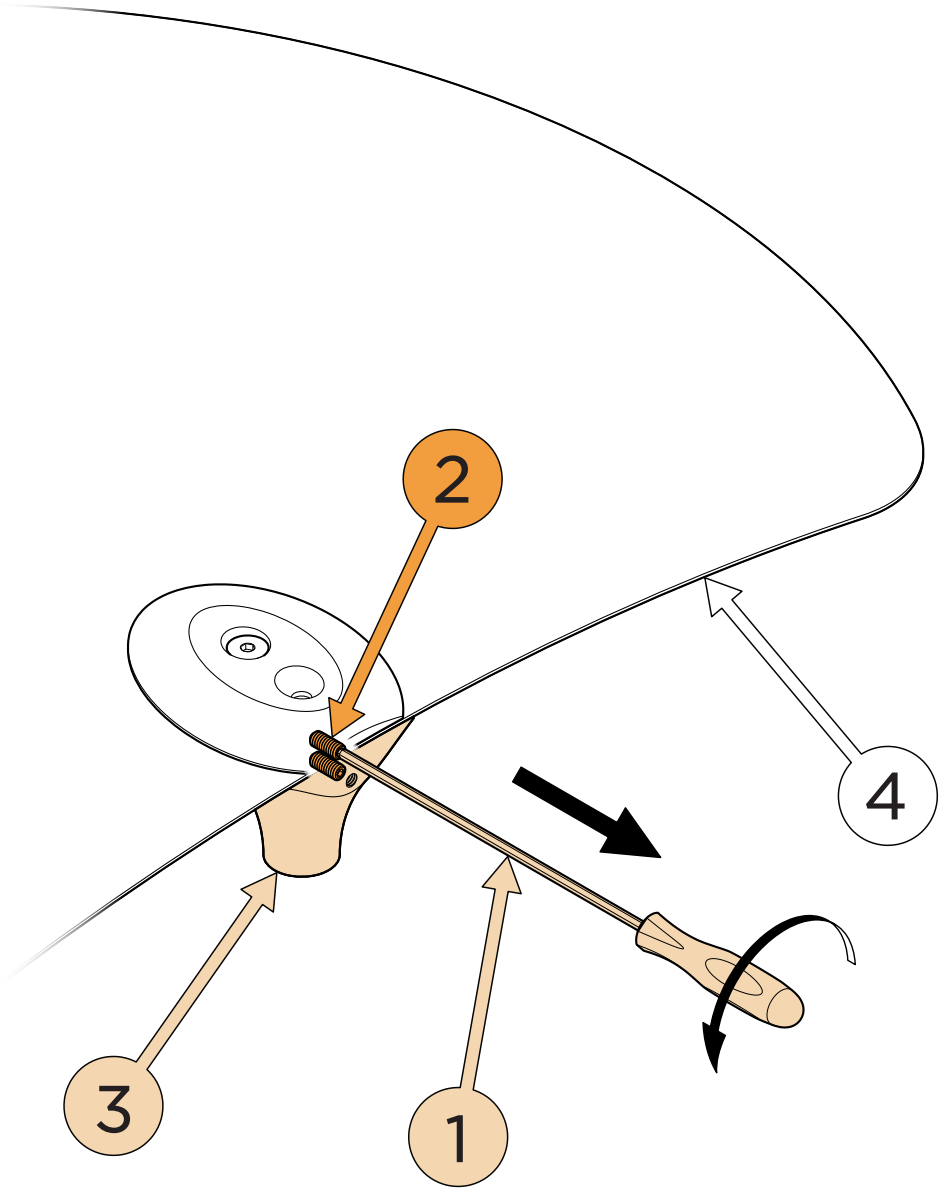

4

Insert the **adapter** (1)
onto the **lighting fixture** (2)

Using the provided **1/8 hex key** (3)
screw the **shade screw** (4)
into the **adapter** (1)
to secure the **shade** (5)
onto the **lighting fixture** (2)

Using the provided **5/64 hex driver** (6)
tighten the two **set screws** (7)
in the **adapter** (1)
to fully secure the **shade** (5)
into place.

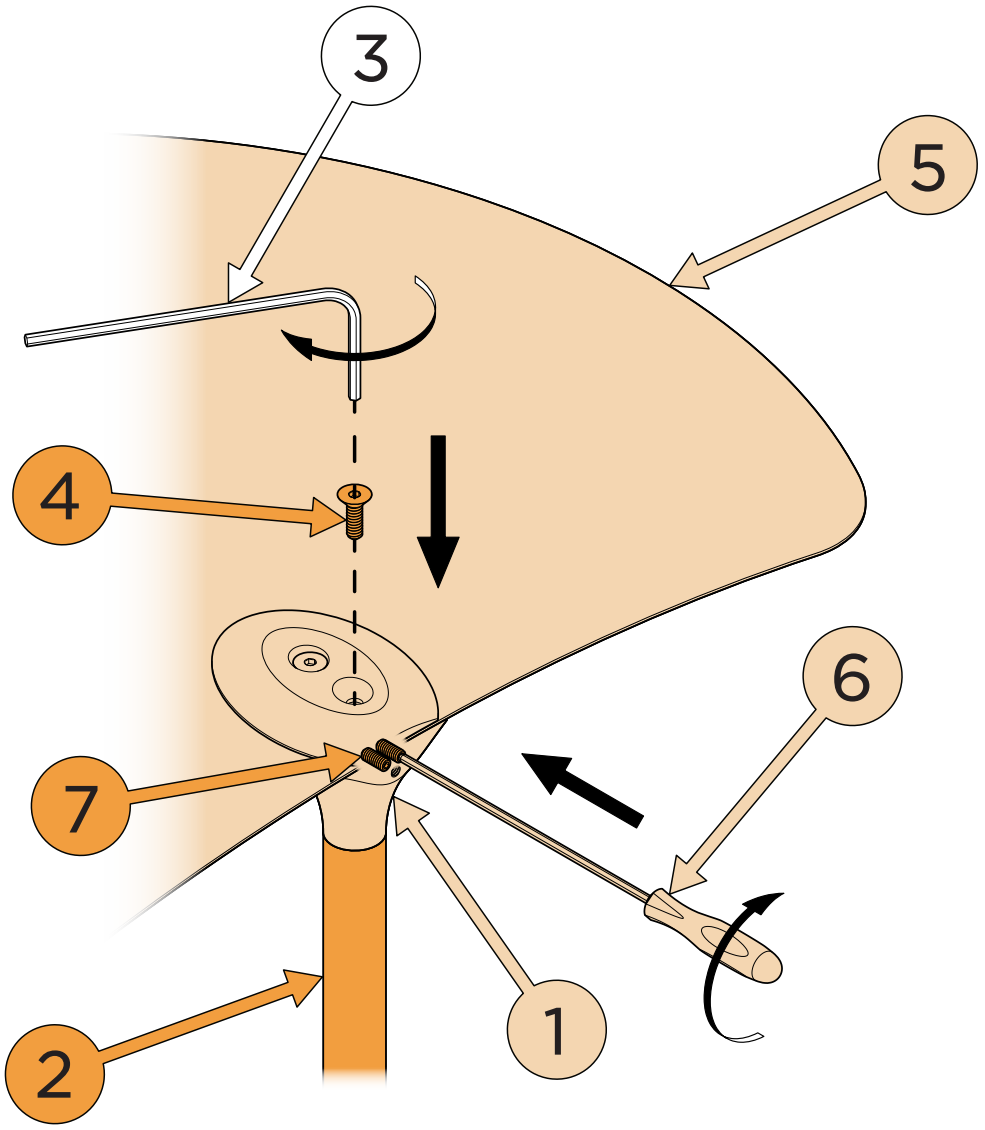

5

Connect the ground wire
from the **lighting fixture** (1)
with the ground wire
from the **junction box** (2)
using a **wire nut** (3)

Connect the **lanyard** (4) loop
from the **lighting fixture** (1)
with the **carabiner** (5)
on the **backplate** (6)

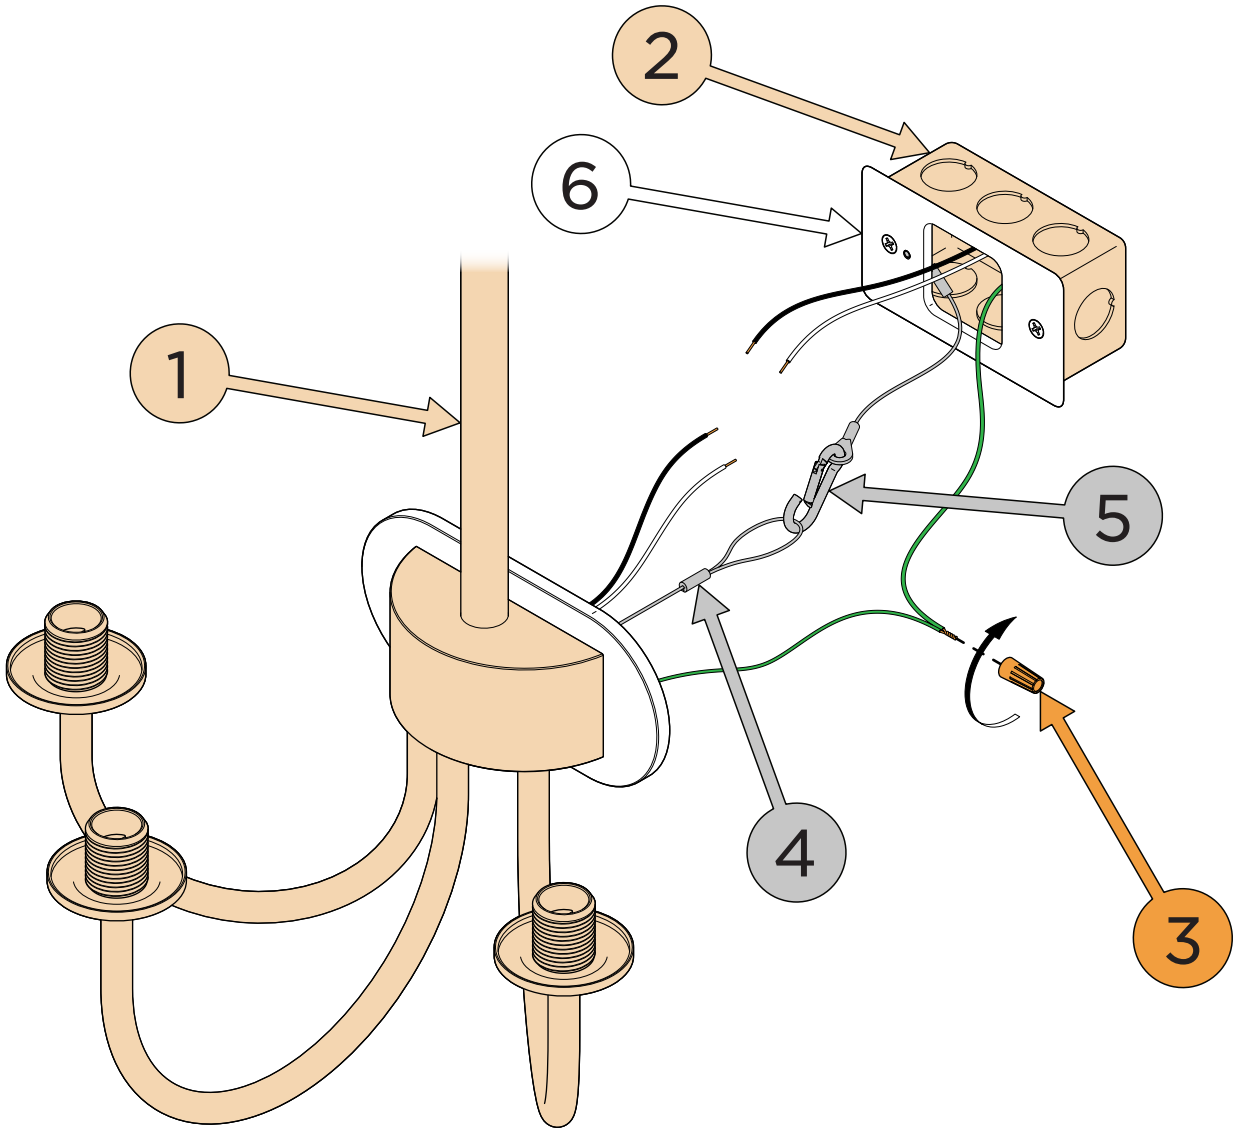

6

Place a **cloth** (1)
over the arms of the
backside of the **lighting fixture** (2)
to protect the finish.

Let the **lighting fixture** (2)
rest on the wall.

Connect the wires
from the **lighting fixture** (2)
with the wires
from the **junction box** (3)
using **wire nuts** (4)

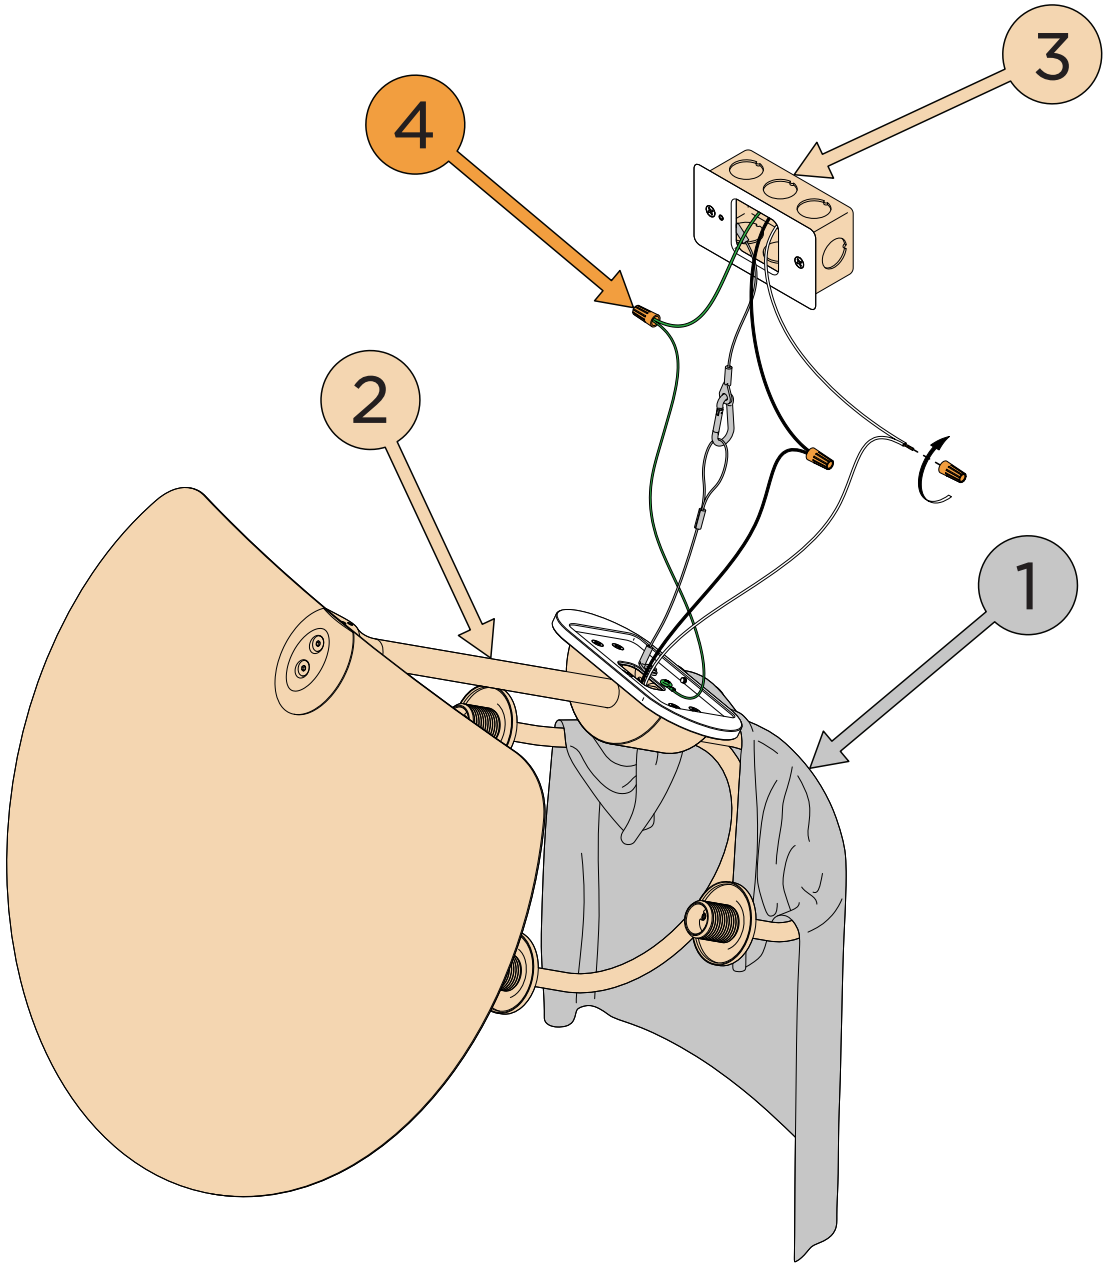

7

Place the **canopy** (1)
over the **backplate** (2)
and let the **lighting fixture** (3)
rest into place.

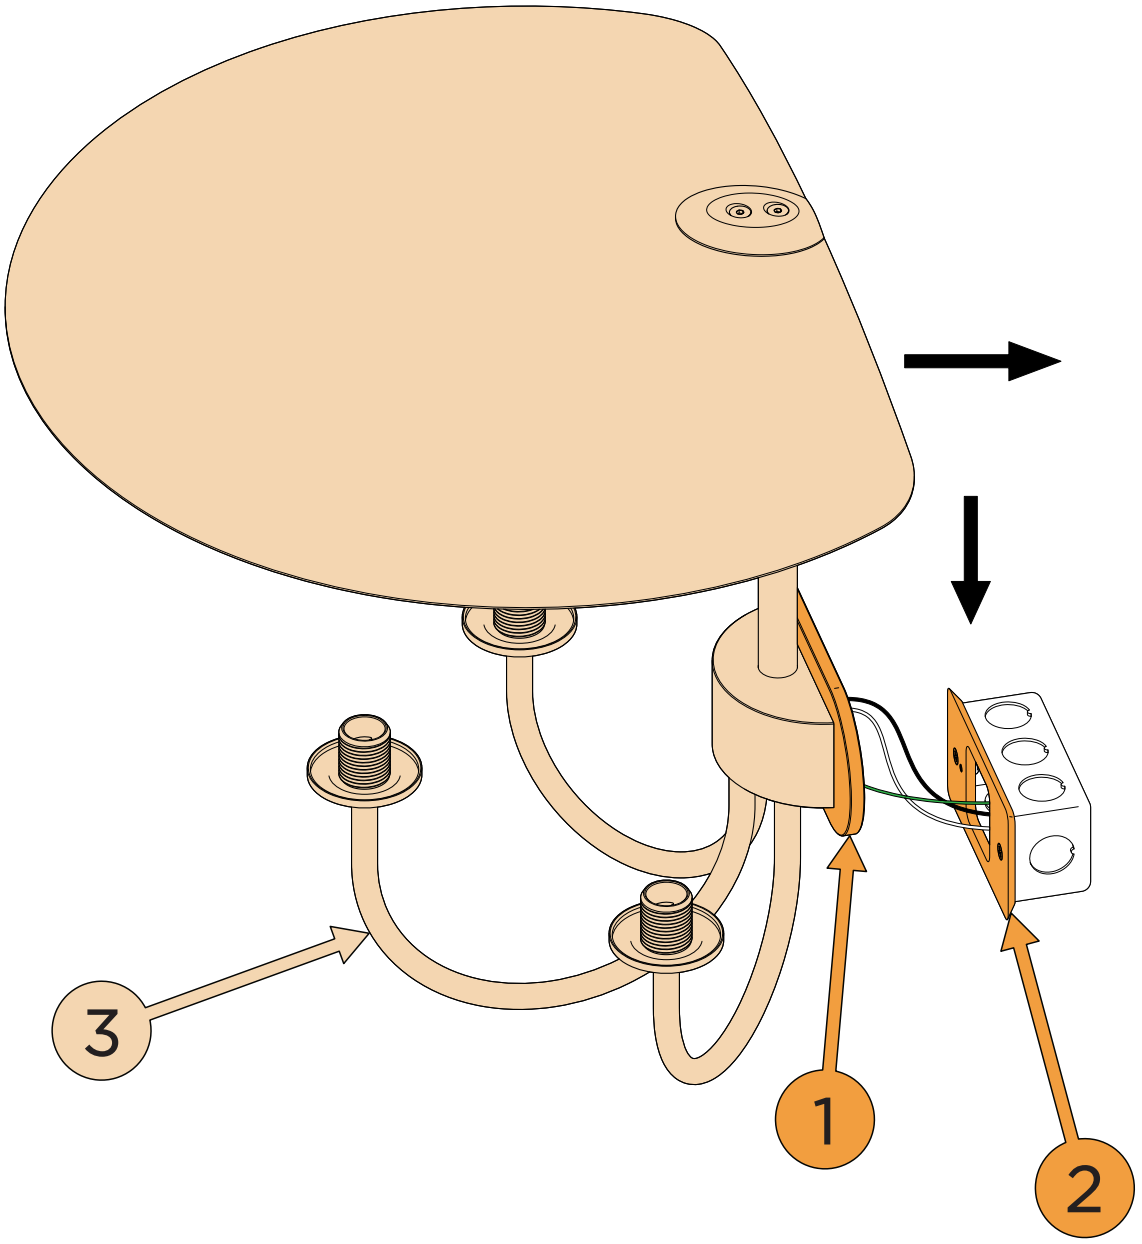

8

Using the provided **1/16 hex driver** (1)
tighten the **set screw** (2)
in the **canopy** (3)
to secure the **canopy** (3)
into place.

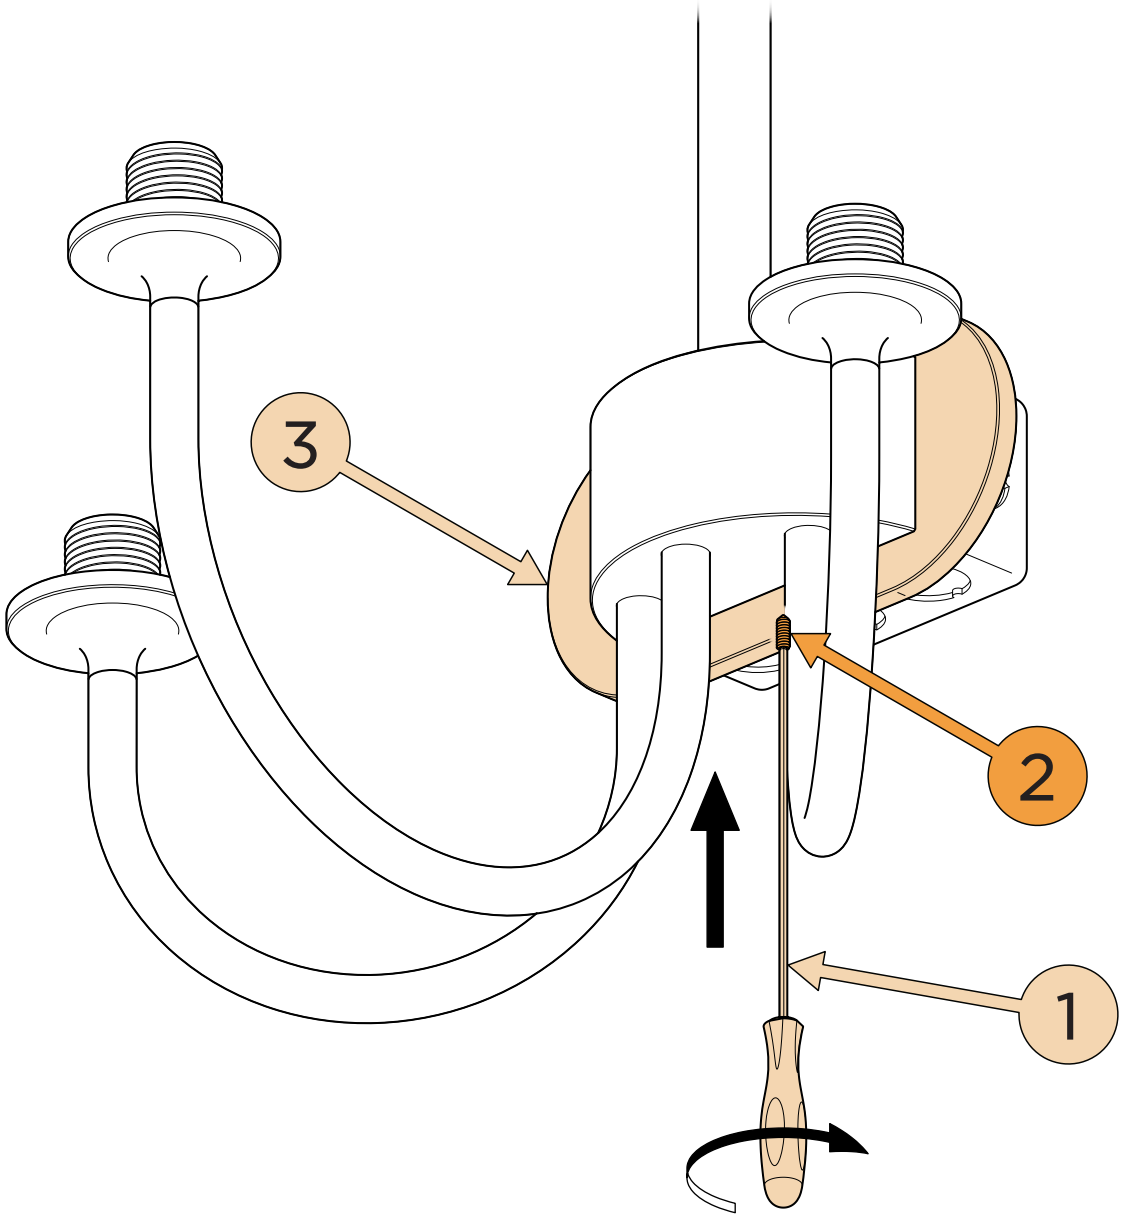

9

Place the **glass shades** (1)
over the **socket covers** (2)

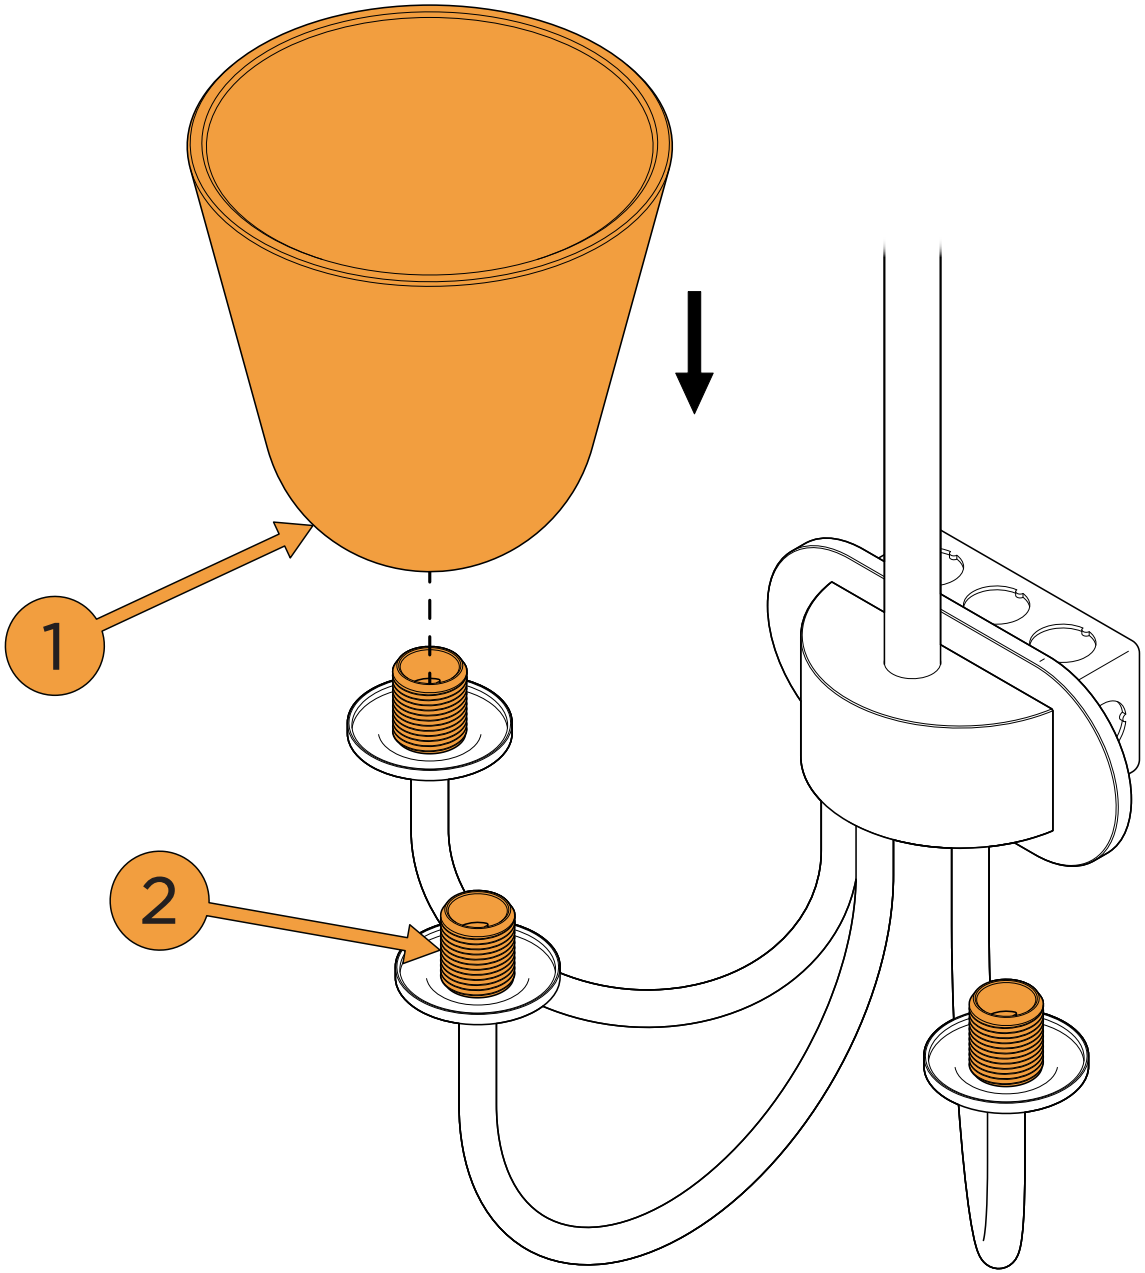

10

Insert the **light bulbs** (1)
into the **fixture sockets** (2)
CRITICAL: Align pins with
pin holes, then push in.

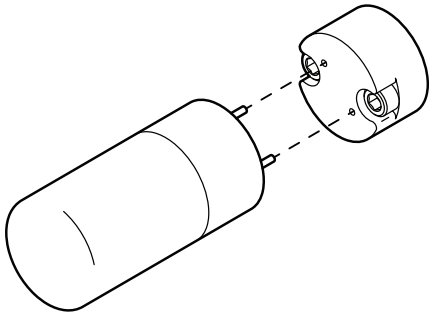

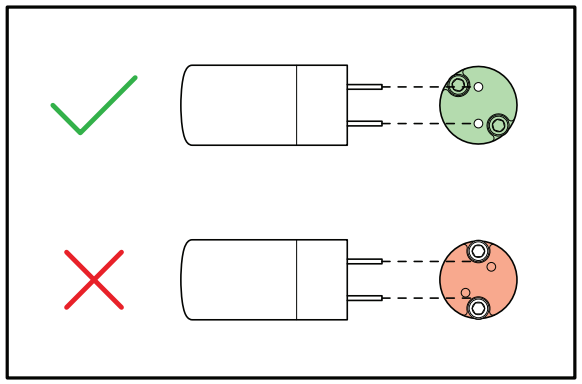

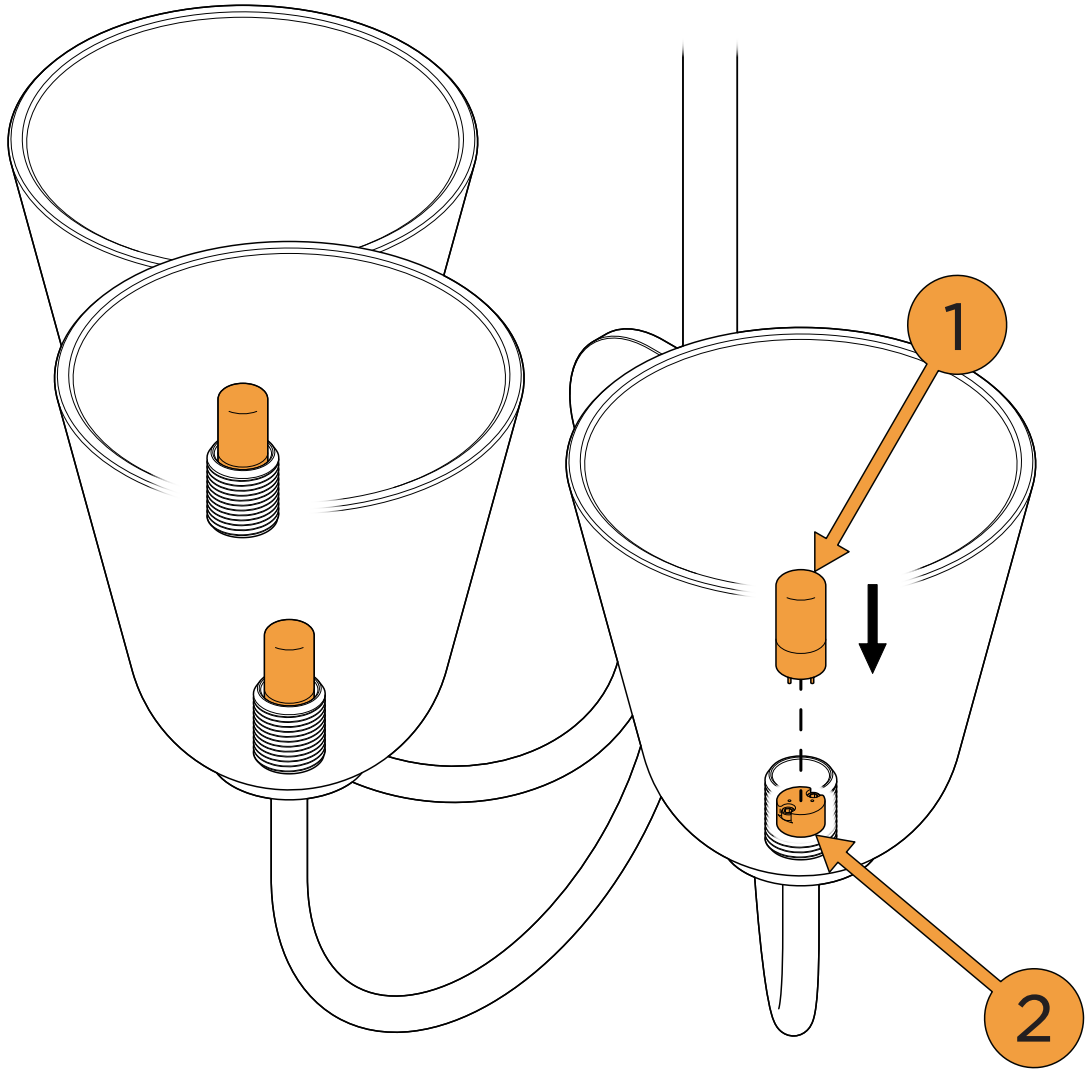

11
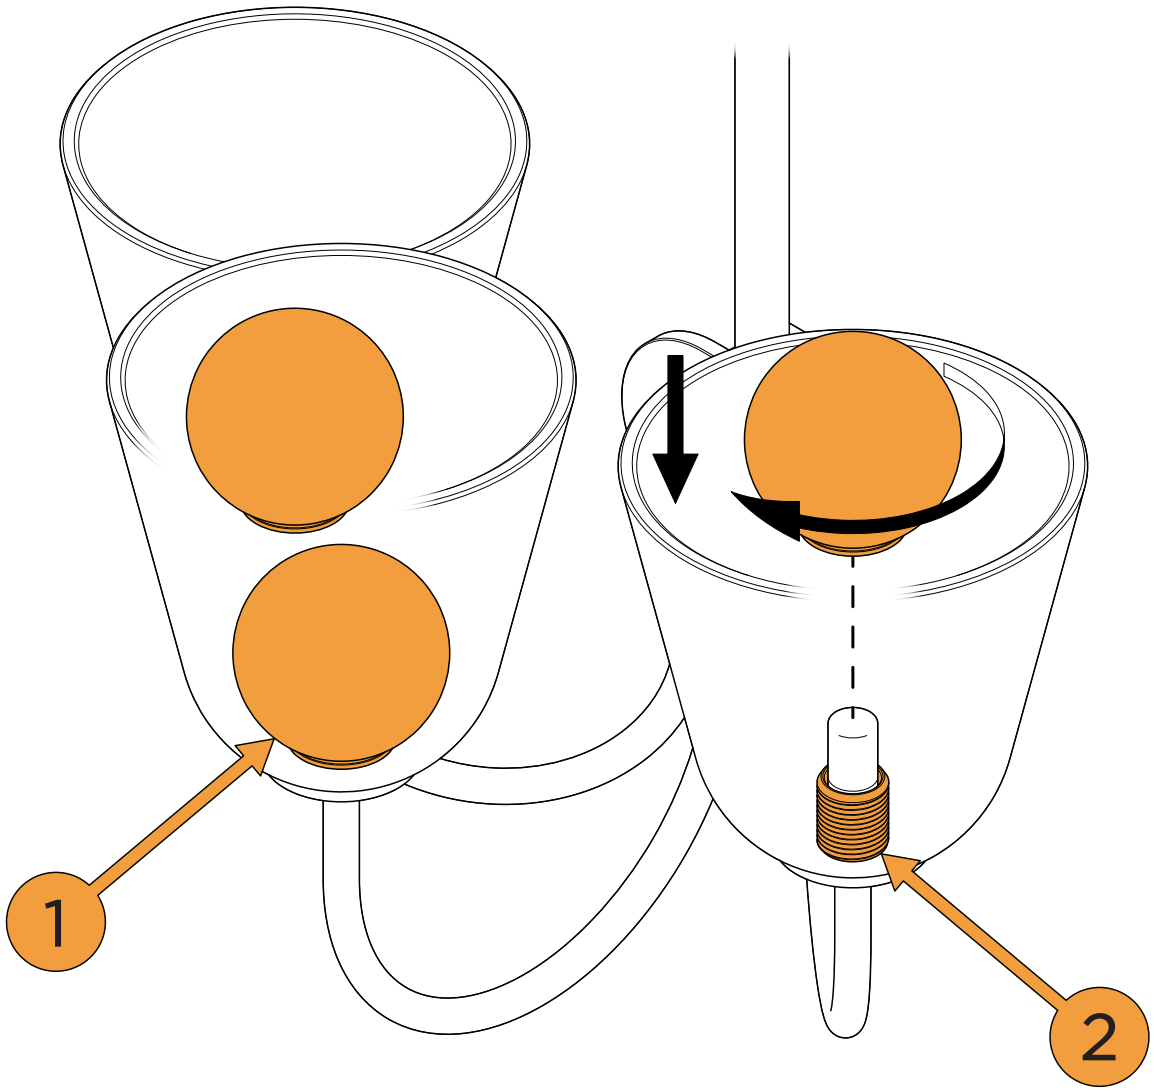
Screw the **glass** (1)
onto the **socket covers** (2)
CAUTION: Align threads properly for a smooth rotation before twisting to avoid jamming.
Do not overtighten the glass.