ALLIED MAKER

MADE IN NEW YORK

Drift Pendant

Installation Guide

212-334-7333

help@alliedmaker.com

LIVING FINISHES

Wear Gloves!

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND HAZARDS INVOLVED

Contents Included



Canopy



Lock Ring

Light Bulb

8x Fixture Screw

2x Phillips Screw

5/64 Hex Driver

Hang Tube

Lighting Fixture

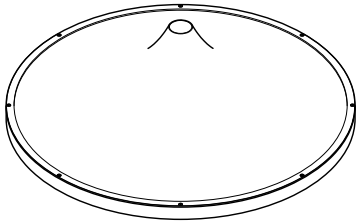

Shade



Glass Shade

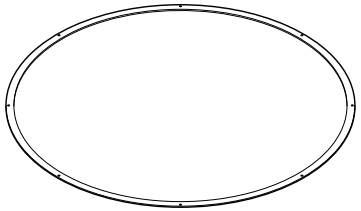

Shade Ring

1

Travel the wires from the **lighting fixture** (1) through the **hang tube** (2)

Screw the **hang tube** (2) onto the **lighting fixture** (1)

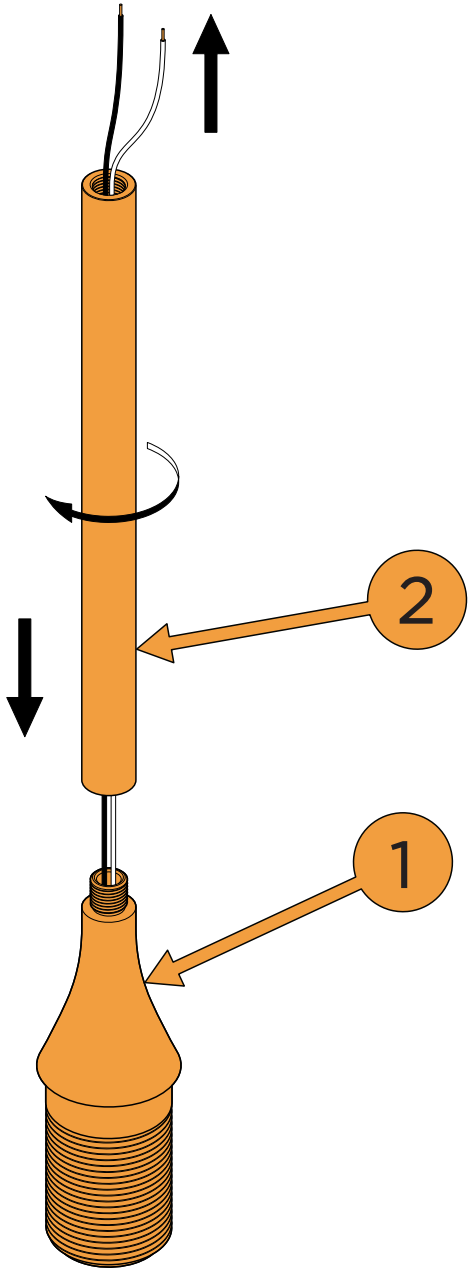

2

Travel the wires
through the **hang straight** (1)

Screw the **hang straight** (1)
onto the **hang tube** (2)

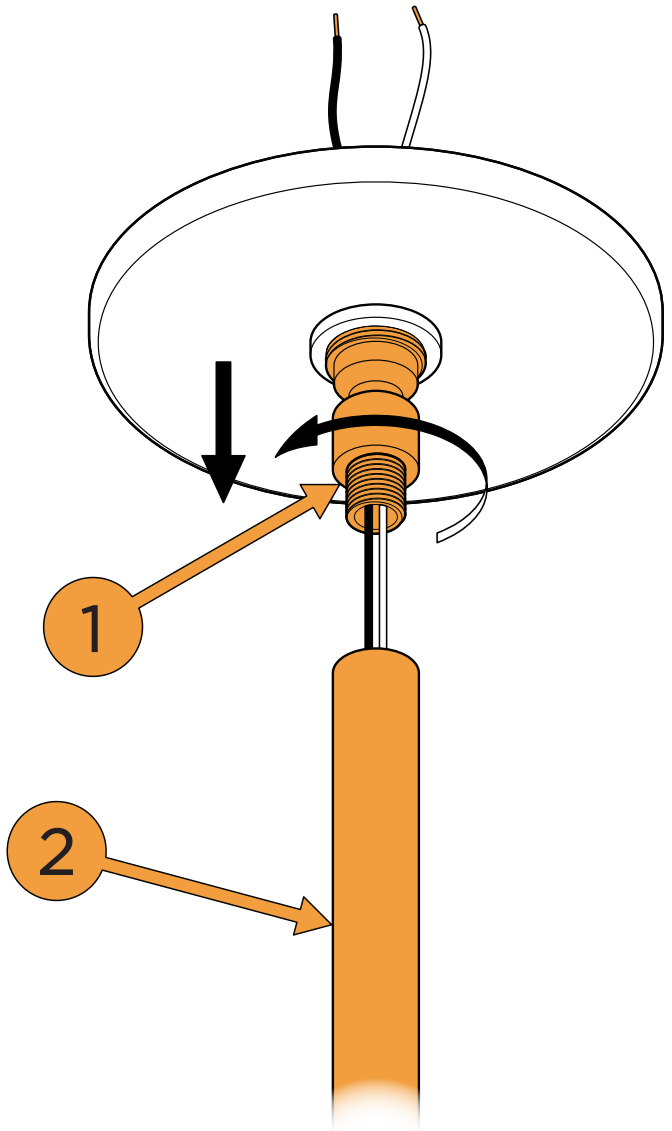

3

Unscrew the **knurled ring** (1)
from the **hang straight** (2)

Carry the **knurled ring** (1) and the
canopy (3) down the **hang tube** (4)

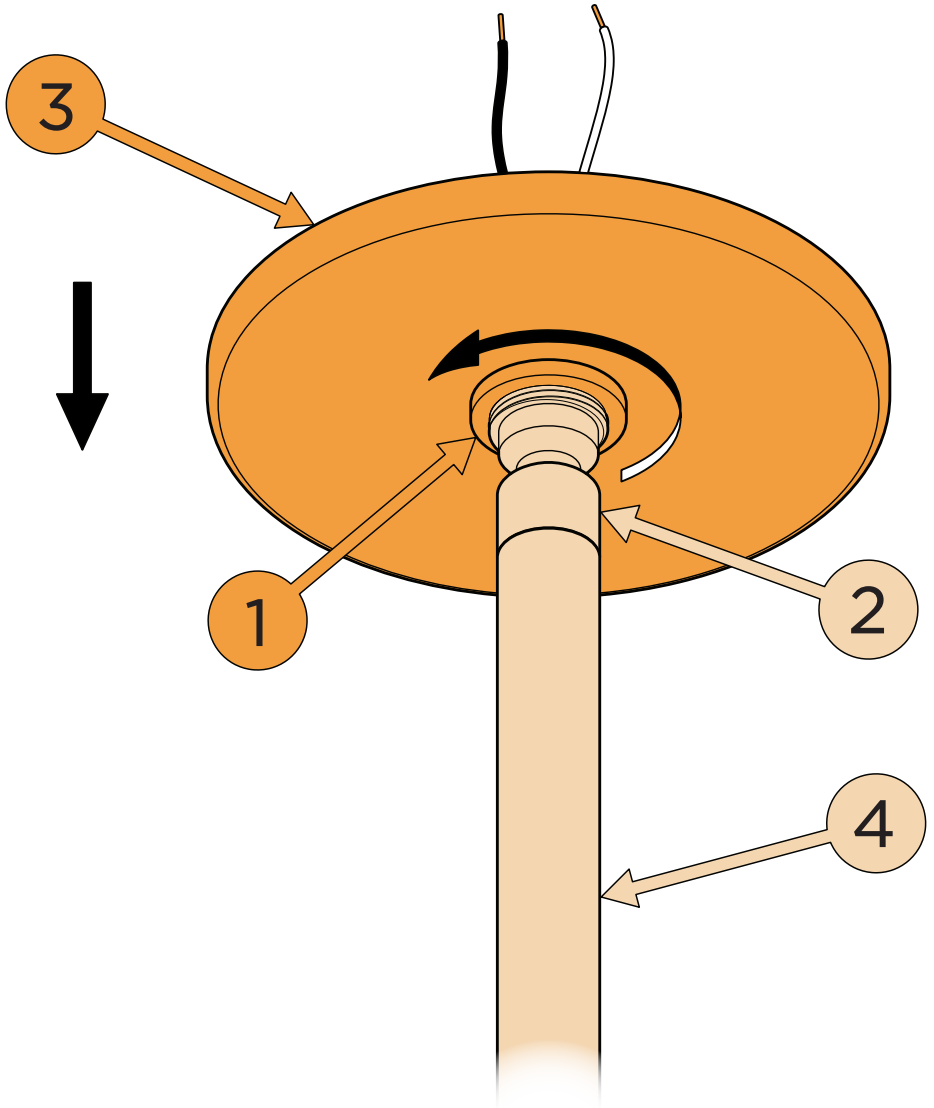

4

Mount the **backplate** (1)
onto the **junction box** (2)
using the provided **phillips screws** (3)

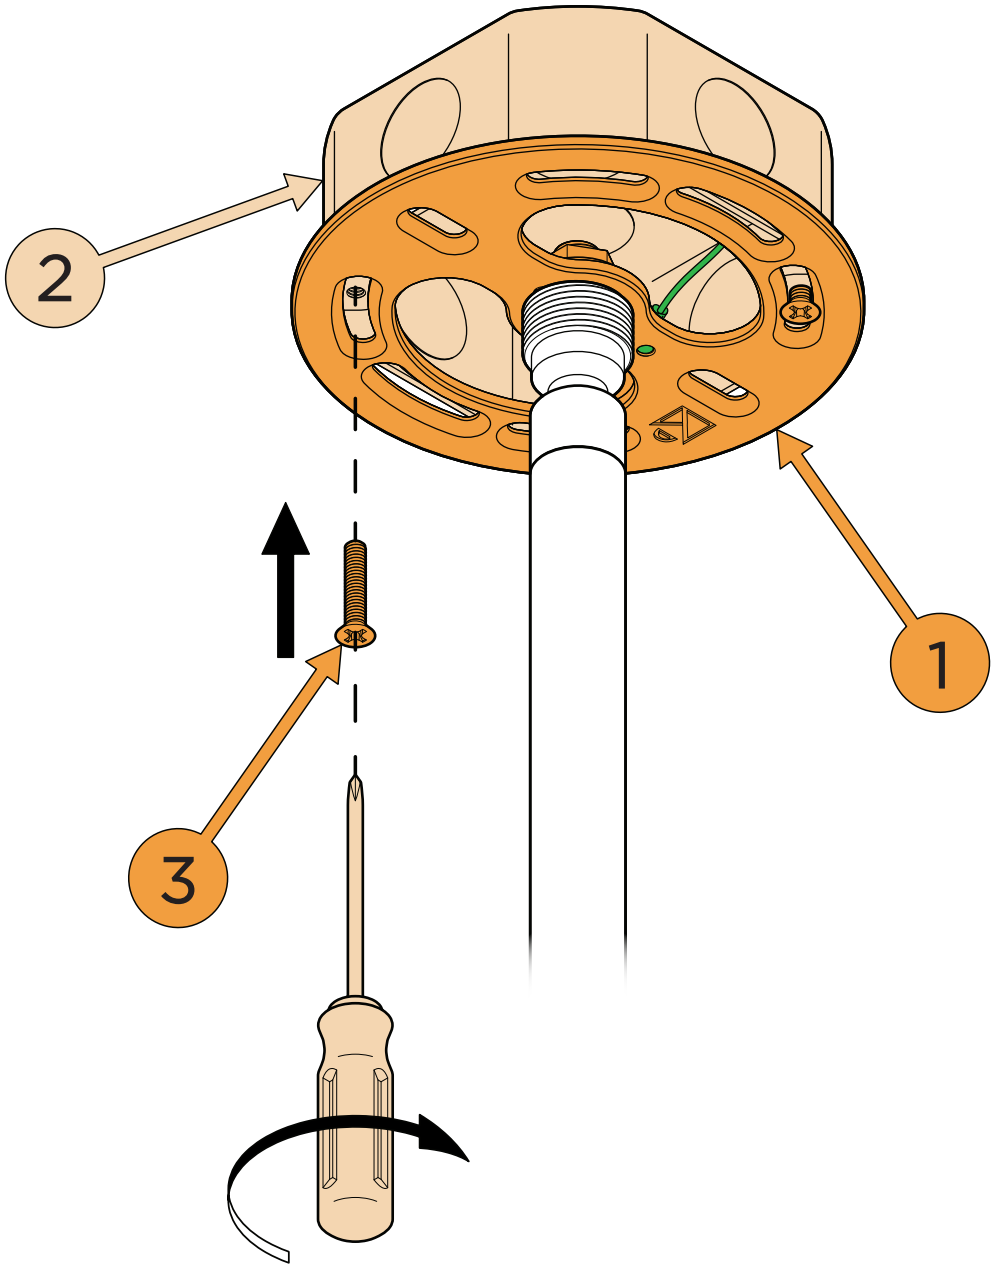

5

Connect the wires from the lighting fixture with the wires from the **junction box** (1) using **wire nuts** (2)

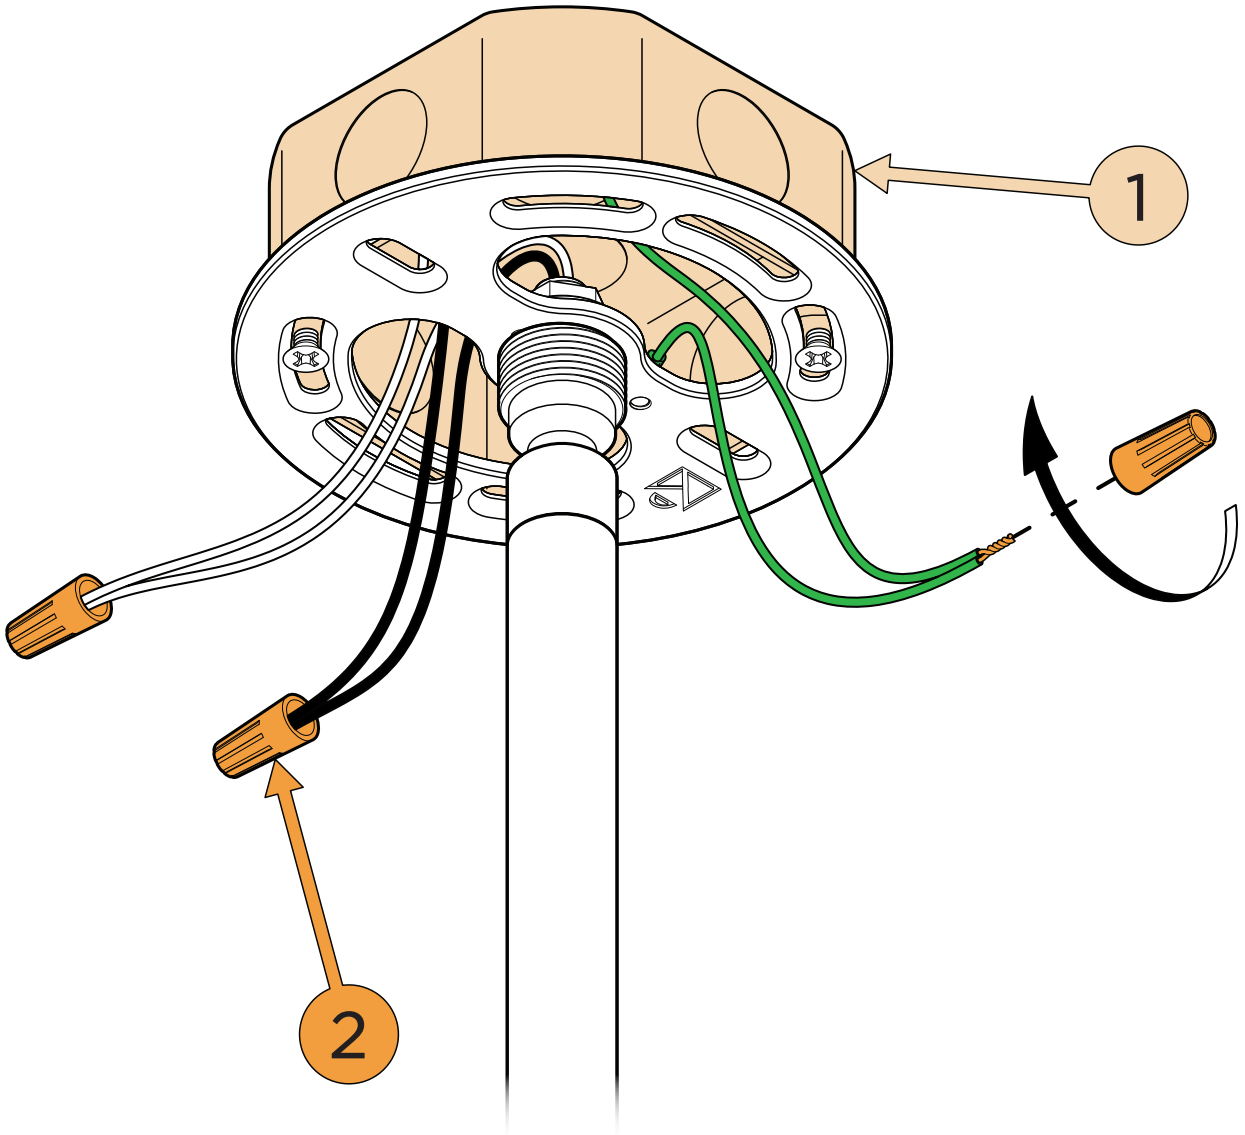

6

Carry the **canopy** (1) and **knurled ring** (2) up the **hang tube** (3) and screw the **knurled ring** (2) onto the **hang straight** (4) to secure the **canopy** (1) into place.

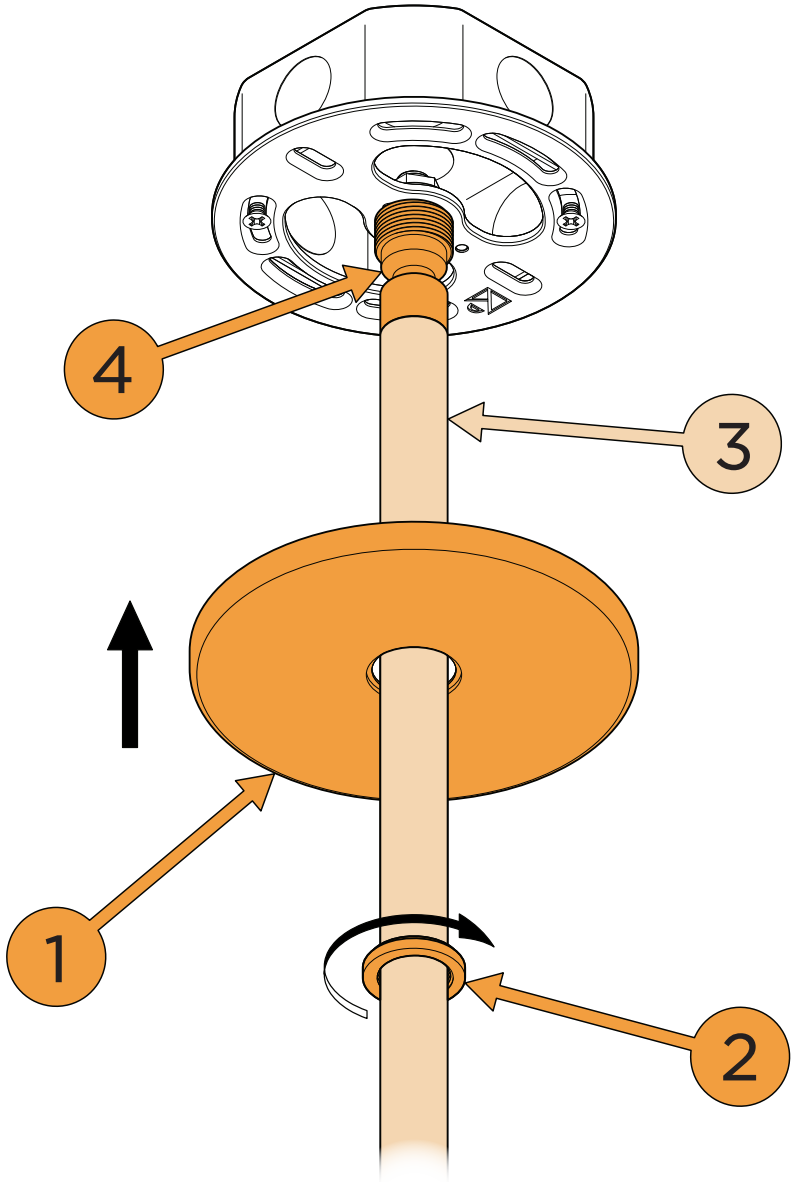

7

Place the **shade** (1)
over the **lighting fixture** (2)
and hold in place.

Screw the **lock ring** (3)
onto the **lighting fixture** (2)
to secure the **shade** (1)
into place.

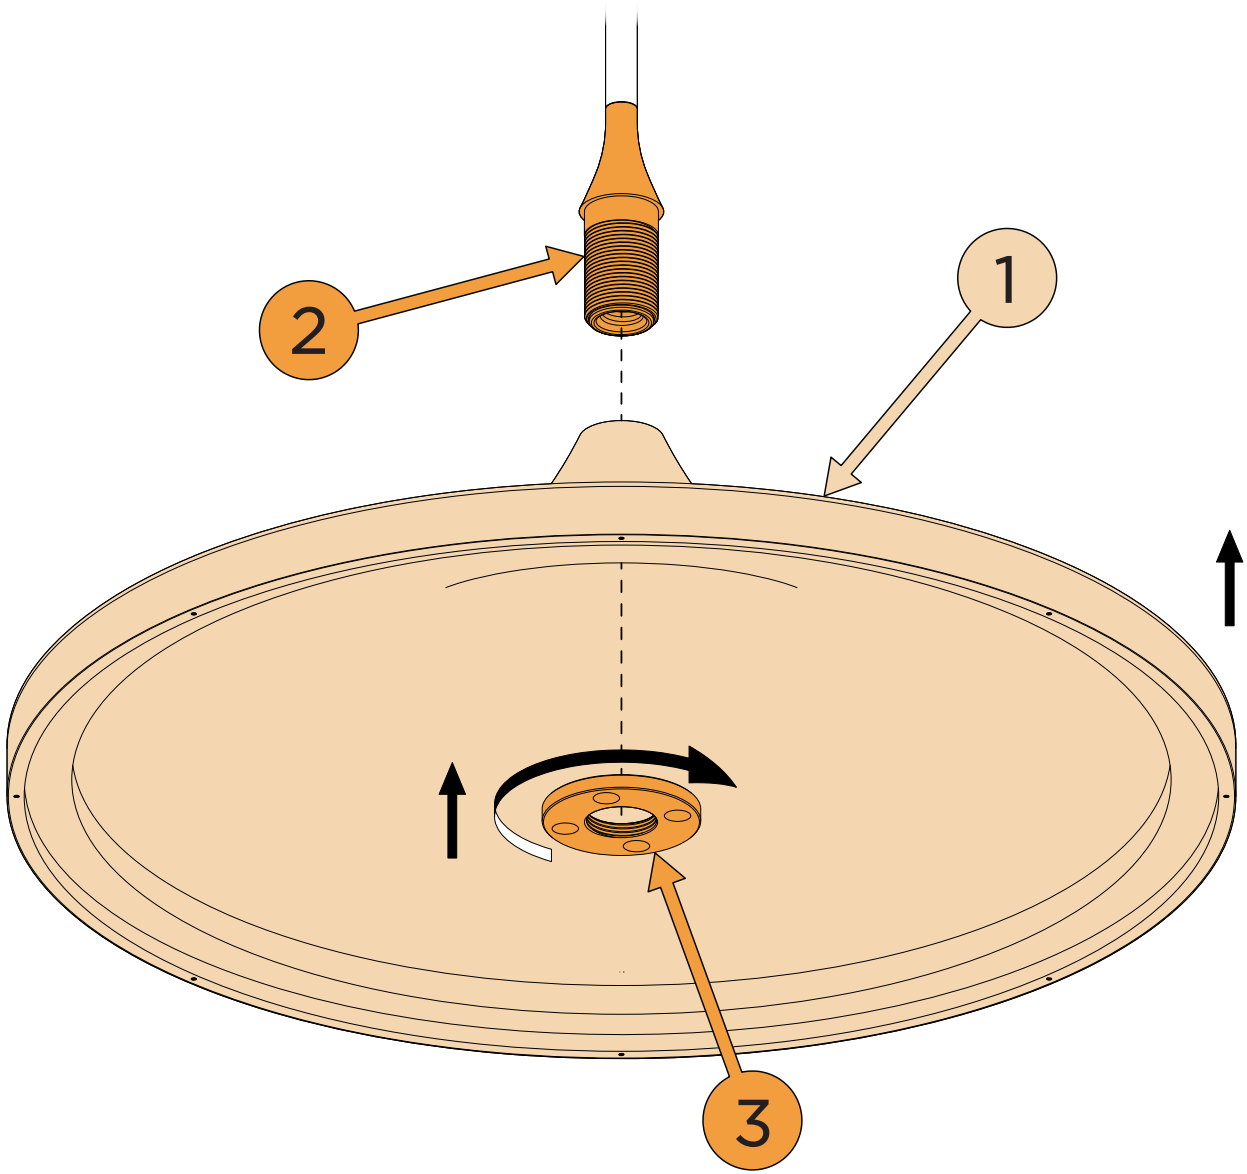

8

Screw the **light bulb** (1)
into the **fixture socket** (2)

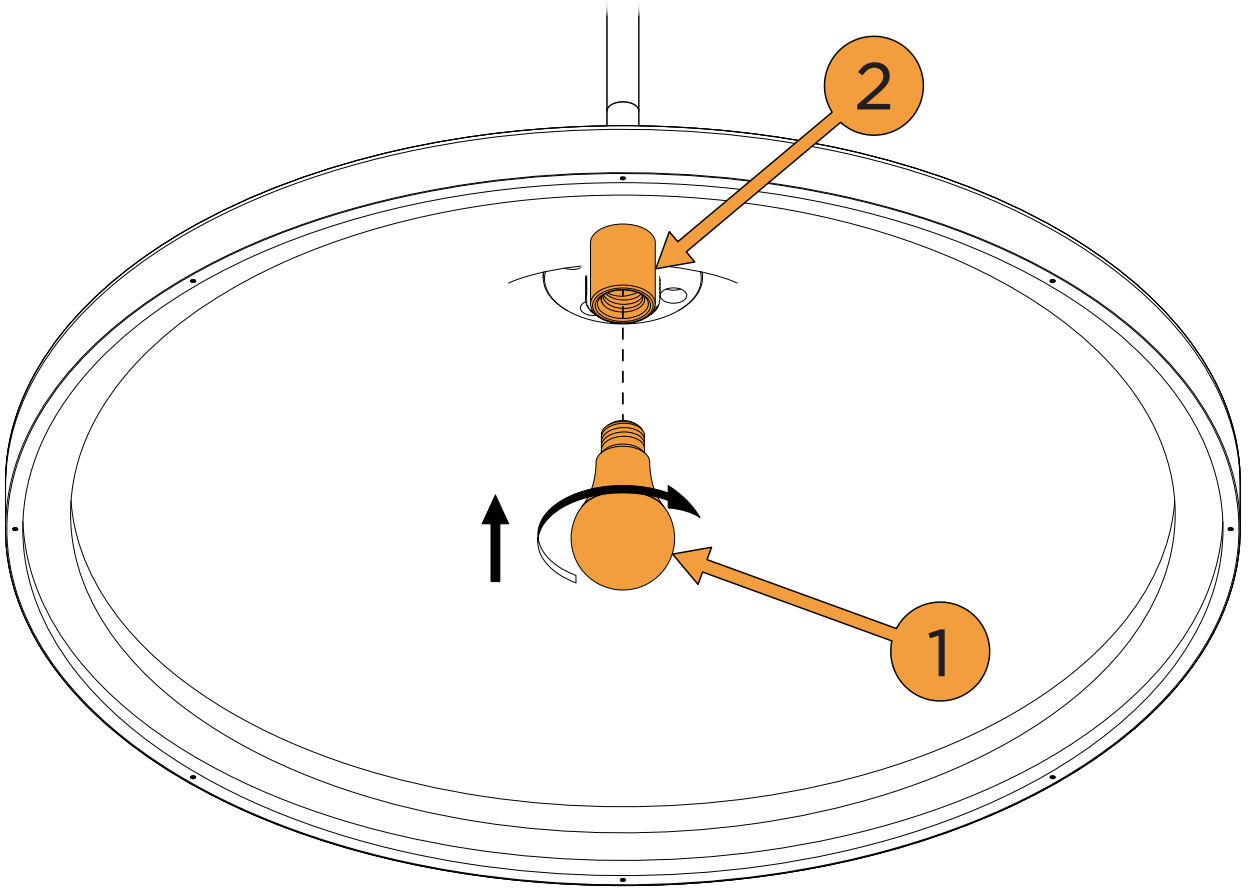

9

Place the **glass shade** (1)
against the **shade** (2)
and hold in place.

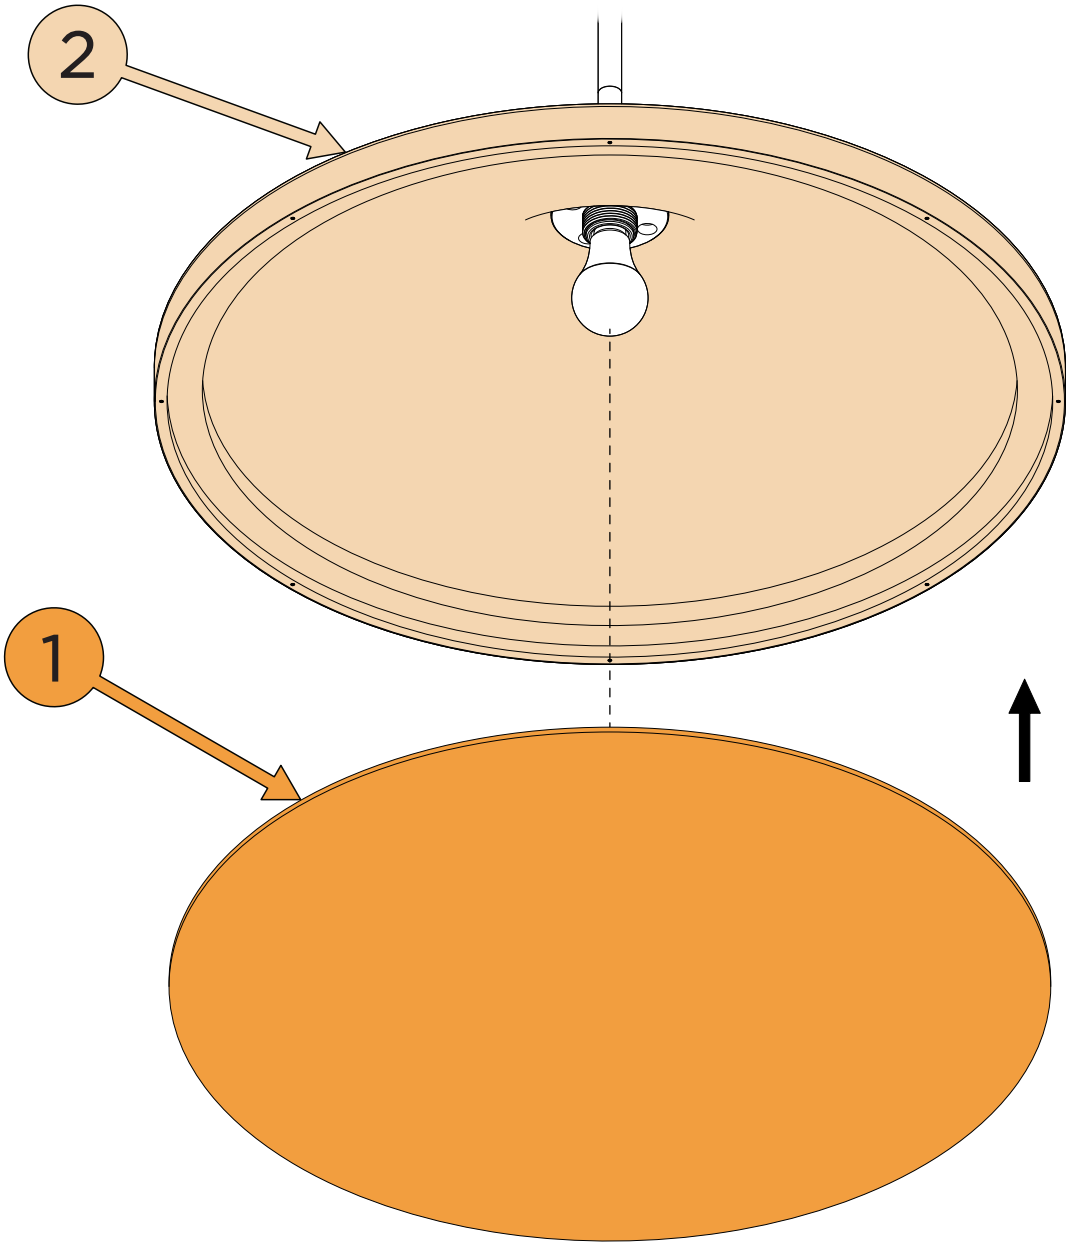

10

Place the **shade ring** (1)
against the **shade** (2)
and hold in place.
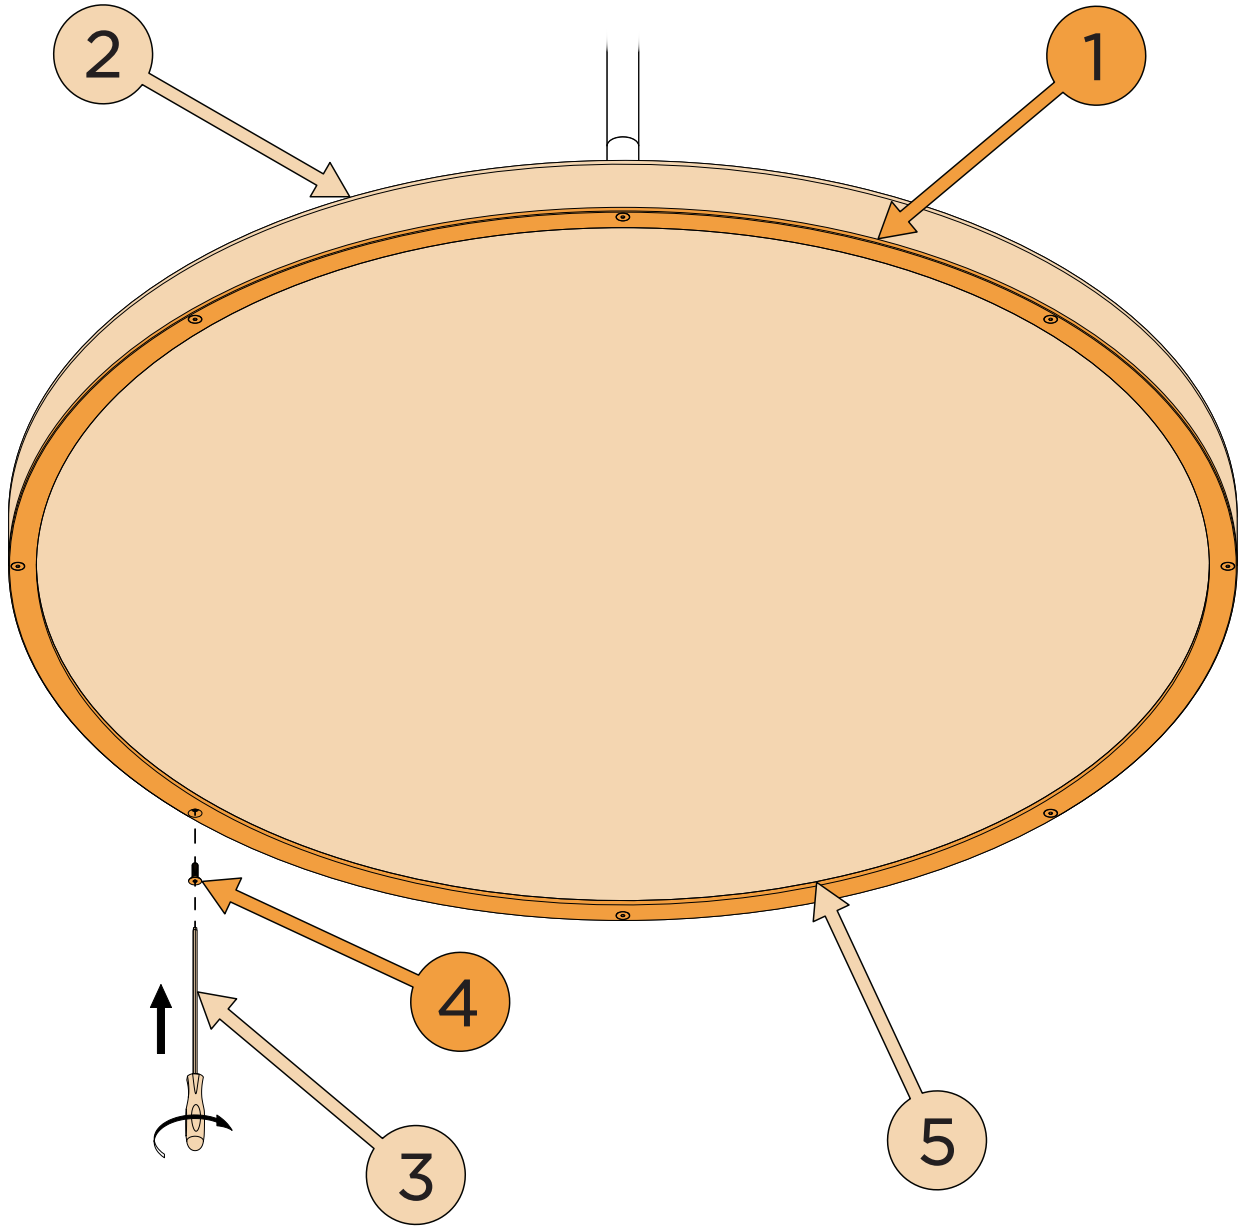
Using the provided
5/64 hex driver (3)
screw the eight **fixture screws** (4)
onto the **shade** (2)
to secure the **glass shade** (5)
into place.