




# Clasp Wall Lamp

INSTALLATION GUIDE



HANDMADE  
IN U.S.A.



WEAR GLOVES  
DURING INSTALL

## FRAGILE FINISHES

**DANGER:** ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.



+1 212 334 7333


[www.alliedmaker.com](http://www.alliedmaker.com) • [sales@alliedmaker.com](mailto:sales@alliedmaker.com)



1



Inspect Contents

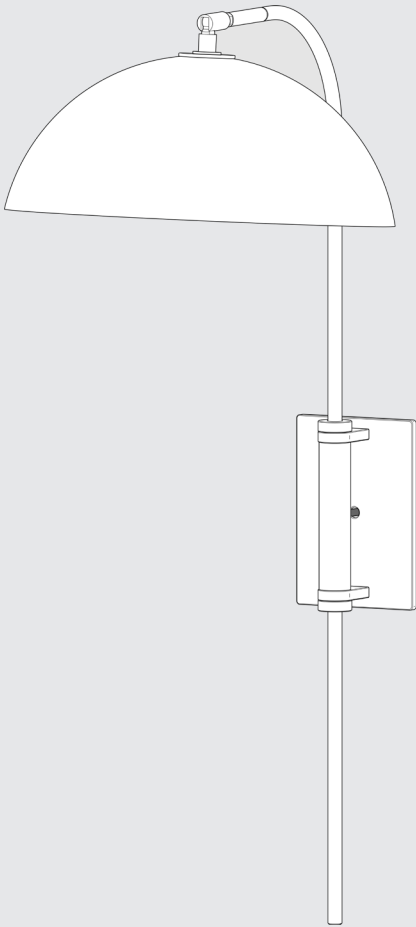


Fixture



Light Bulb



2x Machine Screw



Glass




Set Screw




1/16 Hex Key  
(Not Included)




Terminology




Fixture Backplate




Adapter




Phillips Screwdriver  
(Not Included)



Universal Backplate



Fixture Socket  
&  
Socket Cover




Junction Box  
(Not Included)

3

---


Using a hex key, loosen the set screw on the backplate and remove the universal backplate.

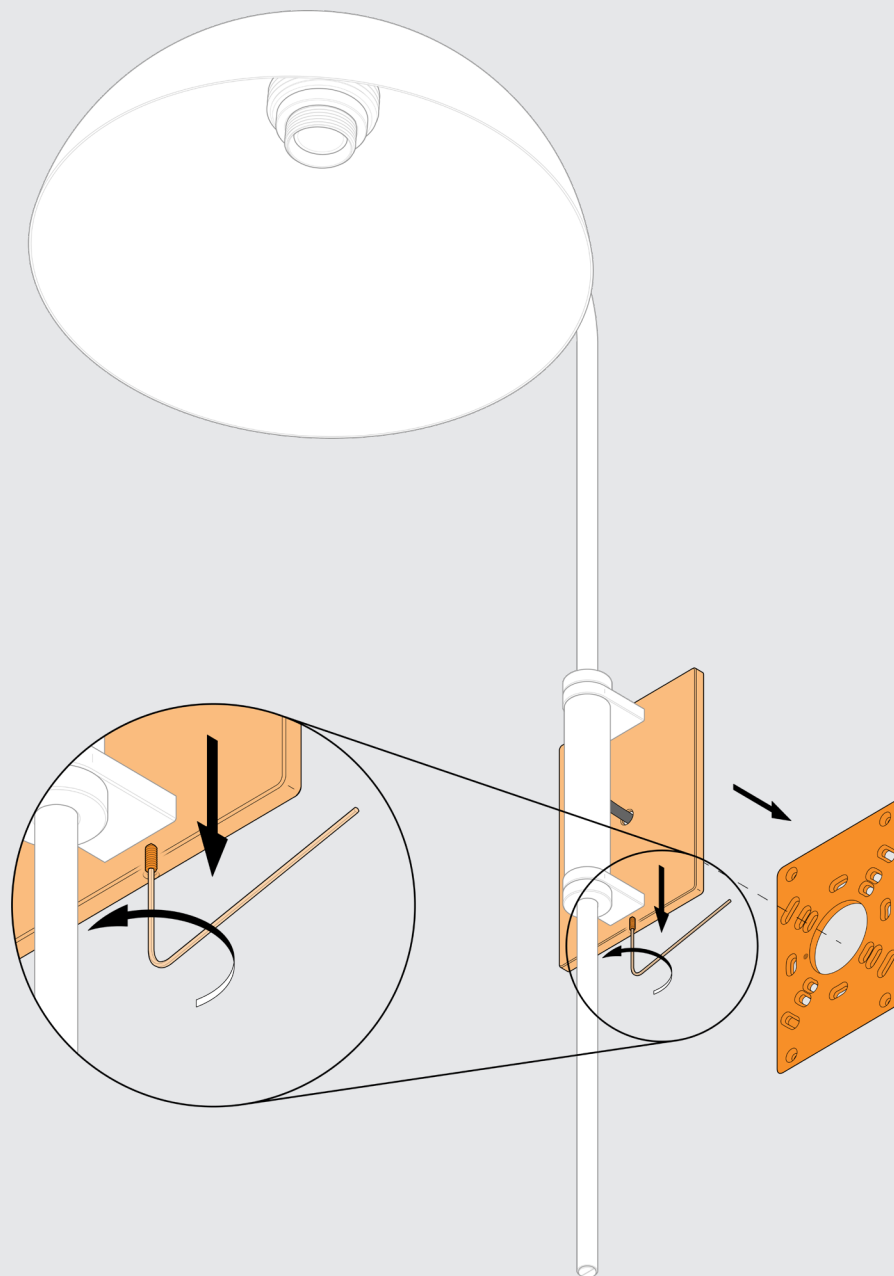

4

---


Mount the universal backplate to the junction box using the provided machine screws.

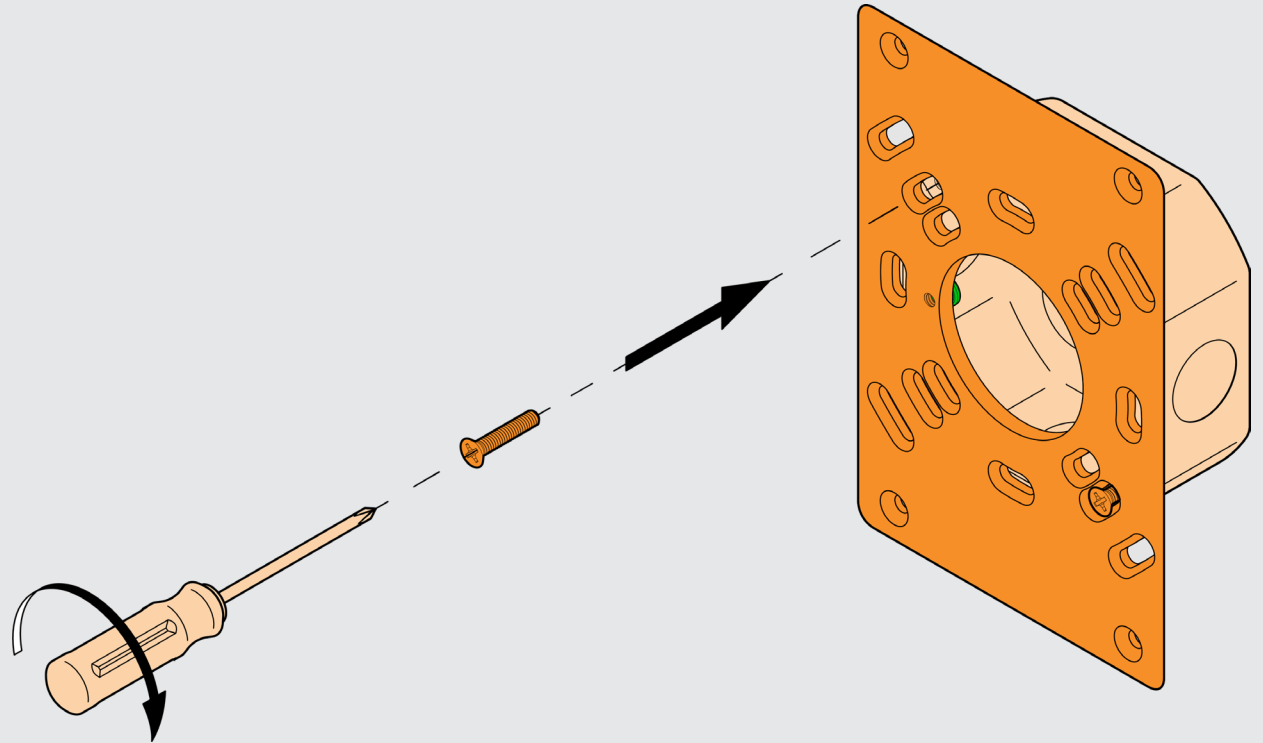

5

---


Connect the ground wire from the universal backplate with the ground wire from the junction box using a wire nut. Then, connect the wires from the fixture to the wires from the junction box using wire nuts.

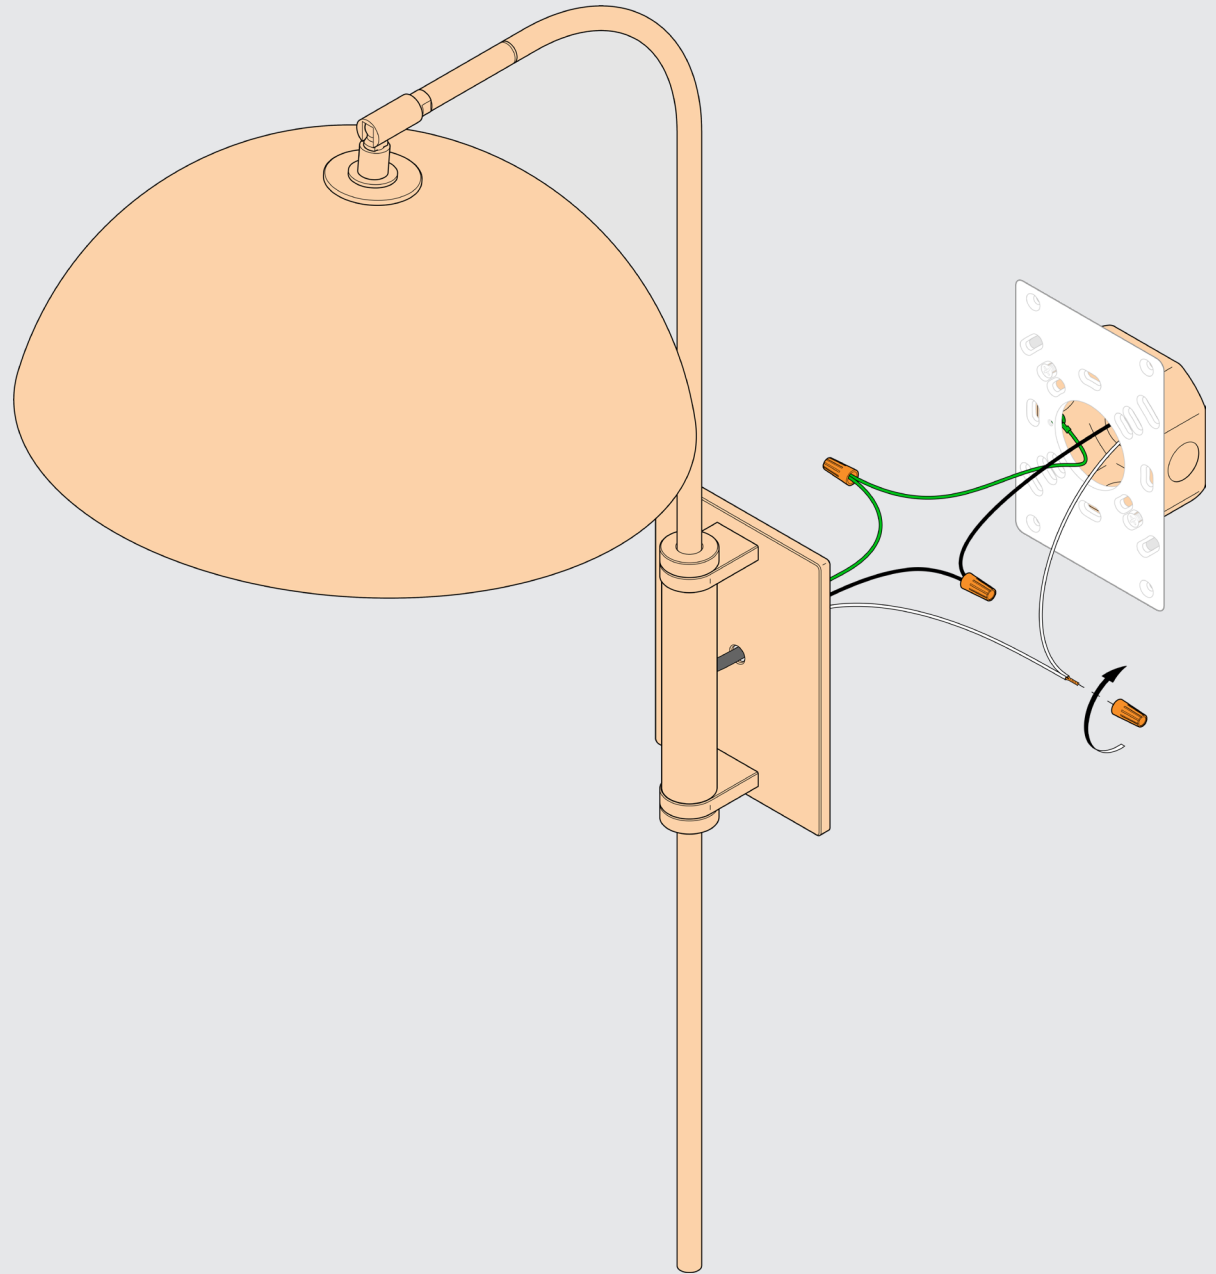

6

---


Tilt the fixture to an upward angle and place the fixture backplate over the universal backplate. Let the fixture rest in place.

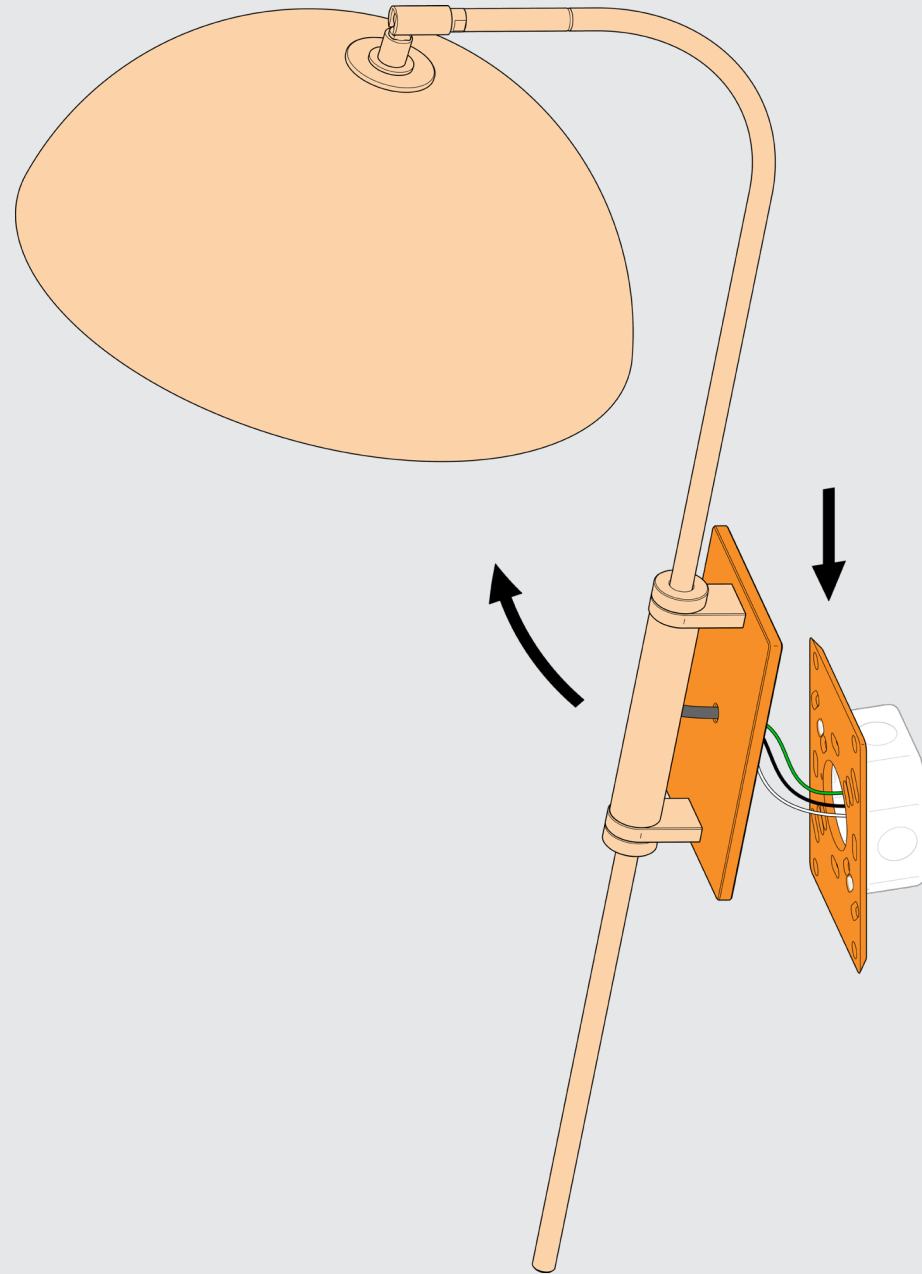

7

---

Once the fixture is resting in place, tighten the set screw on the fixture backplate to secure the fixture into place. Then, screw the light bulb into the fixture socket.

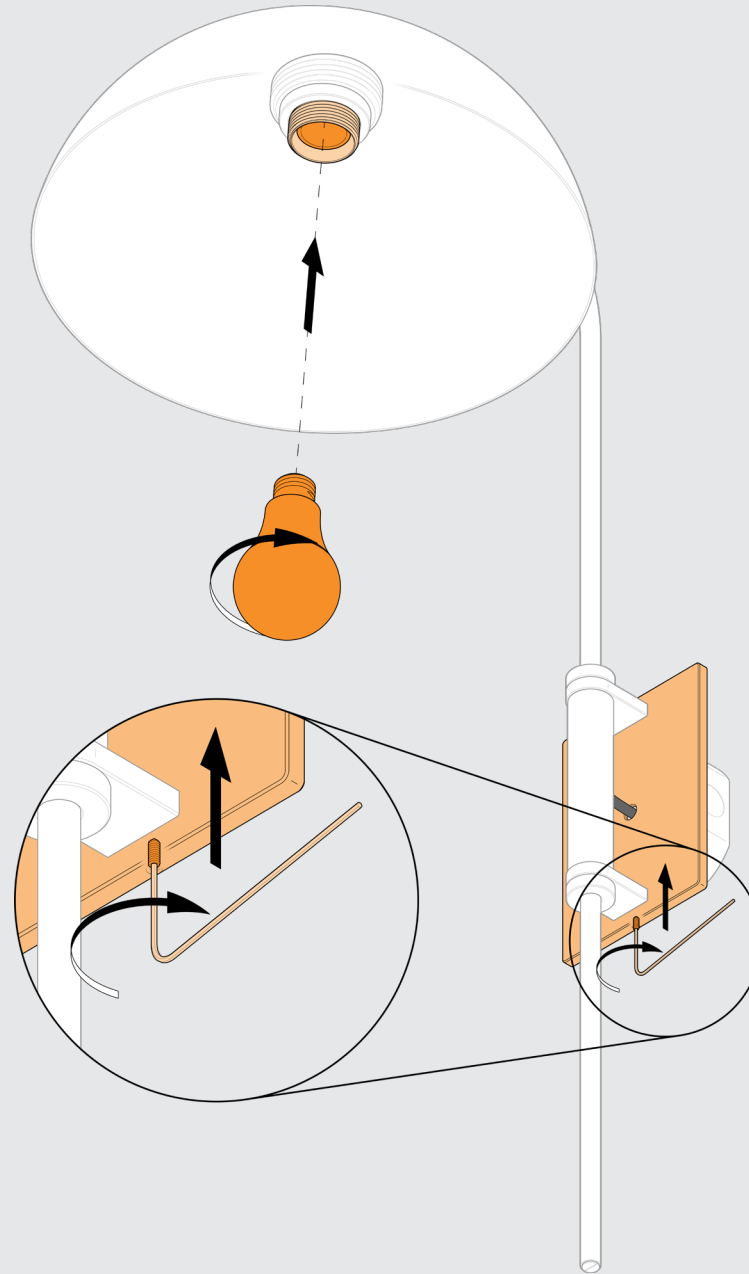

8

---

Screw the glass  
onto the adapter.

**CAUTION:** Align threads  
properly for a smooth  
rotation before twisting  
to avoid jamming. **Do not  
overtighten the glass.**

