Voyager 333 Chandelier

INSTALLATION GUIDE

HANDMADE
IN U.S.A.

WEAR GLOVES
DURING INSTALL

FRAGILE FINISHES

DANGER: ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.

+1 212 334 7333

www.alliedmaker.com • sales@alliedmaker.com

1

Inspect Contents

6x Light Bulb

2x Machine Screw

Crossbar

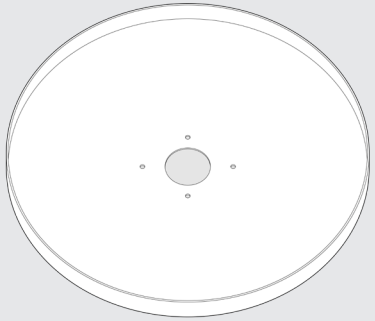

Fixture Backplate

3x Hang Rod

Ball Joint

Finial

3x Fixture

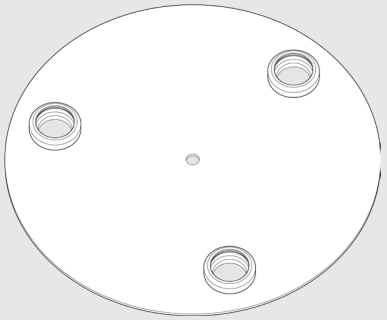

Canopy Assembly

Terminology

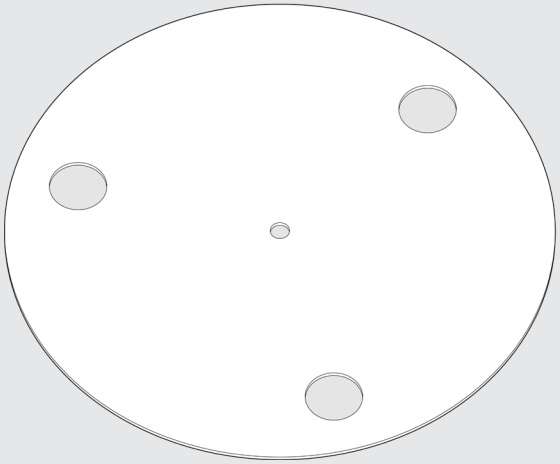

Canopy

9x Wago Connector

3x Adapter

6x Fixture Socket



Phillips Screwdriver
(Not Included)

3x Lock Ring

3x Swivel



Junction Box
(Not Included)

3

Preparation

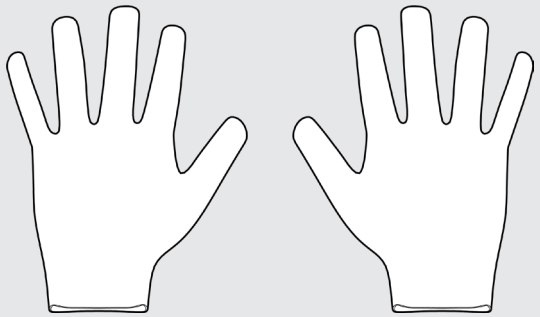

Nitrile Gloves

4

Place the fixture backplate over the junction box, hold in place, and travel the wires from the junction box through the fixture backplate. Then, mount the crossbar and fixture backplate onto the junction box to secure the fixture backplate into place.

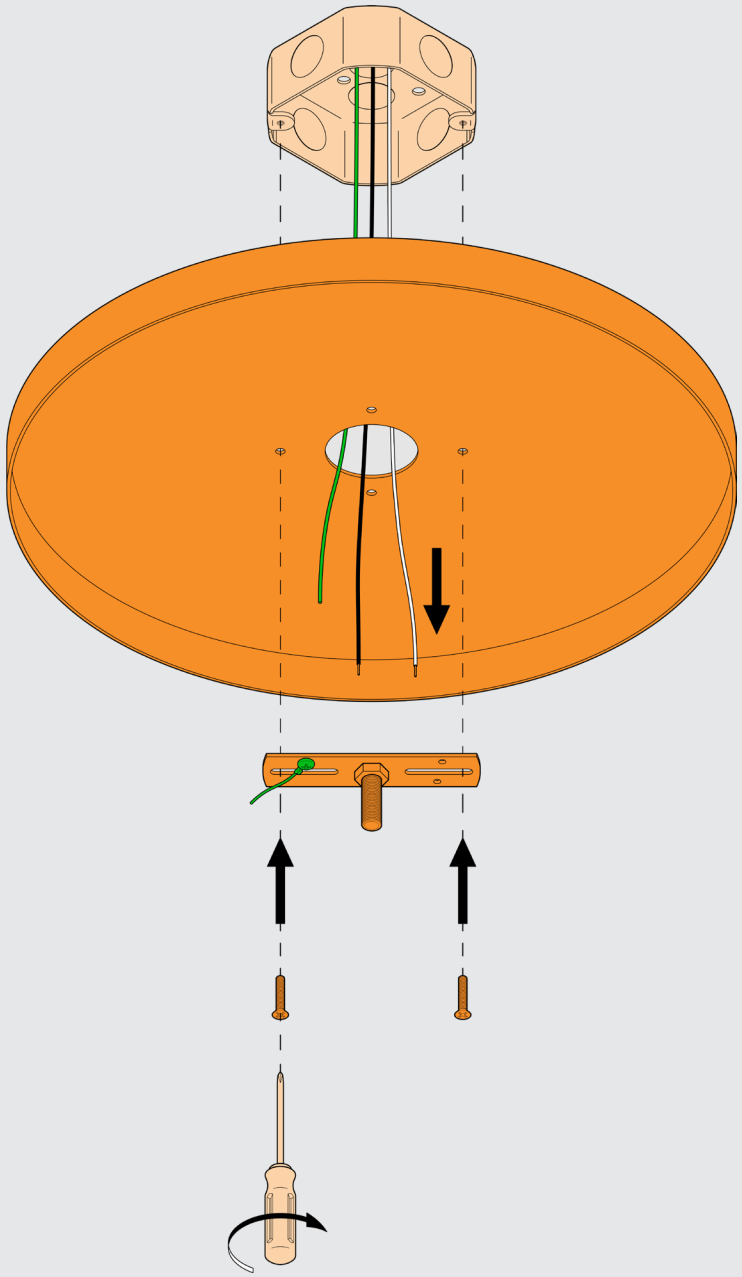

5

Unscrew and remove the lock rings from the adapters on the canopy.

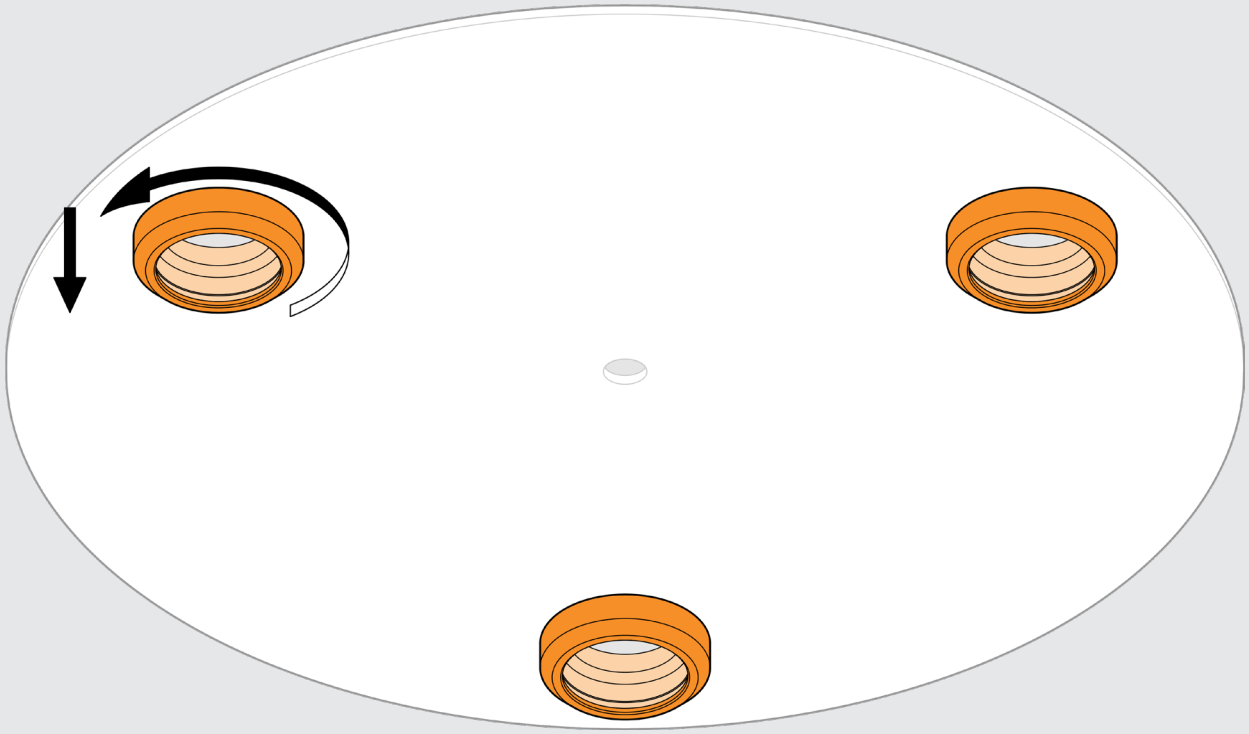

6

Connect the ground wire from the junction box to the ground wire on the crossbar. Then, connect the wires from the junction box to the wires from the fixture canopy using the wago connectors. Then, travel the wires with wago connectors from the backside of the fixture canopy through the canopy holes.

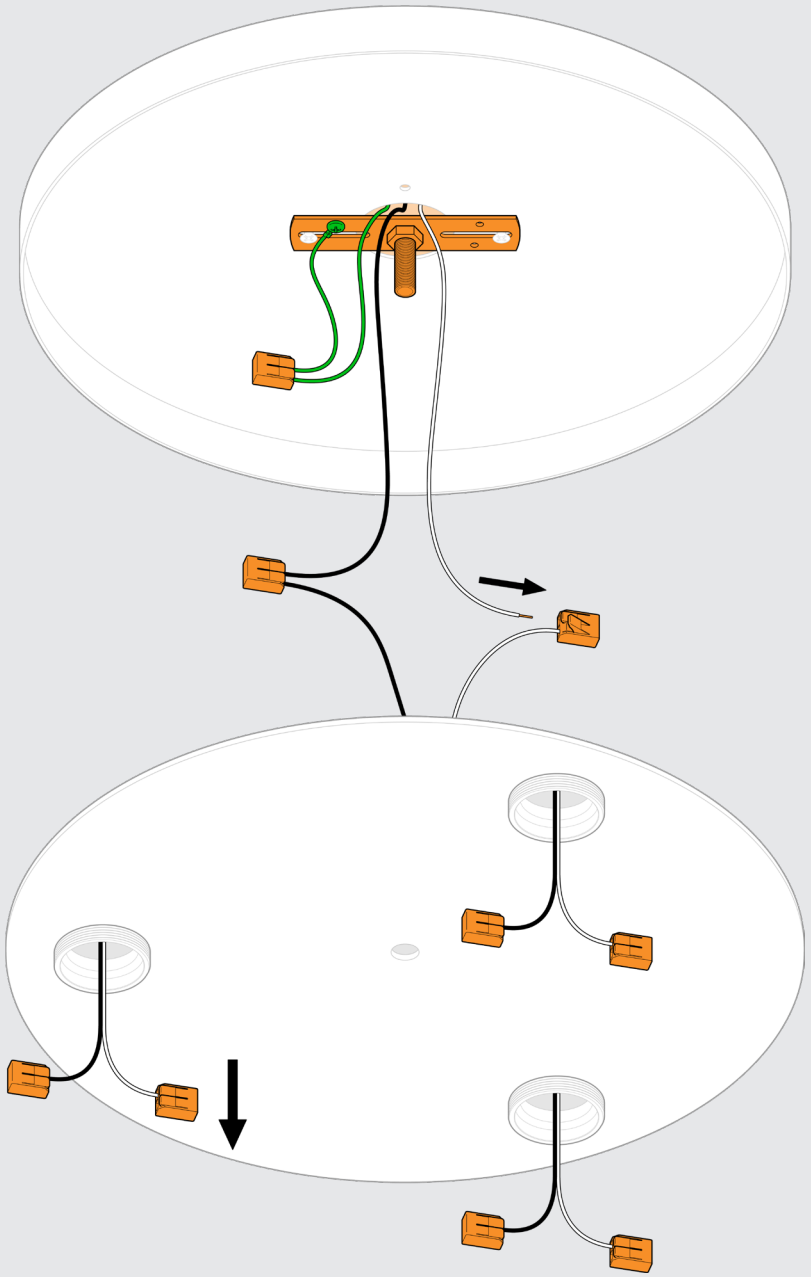

7

Align the fixture canopy over the crossbar nipple and screw the finial onto the nipple to secure the canopy into place.

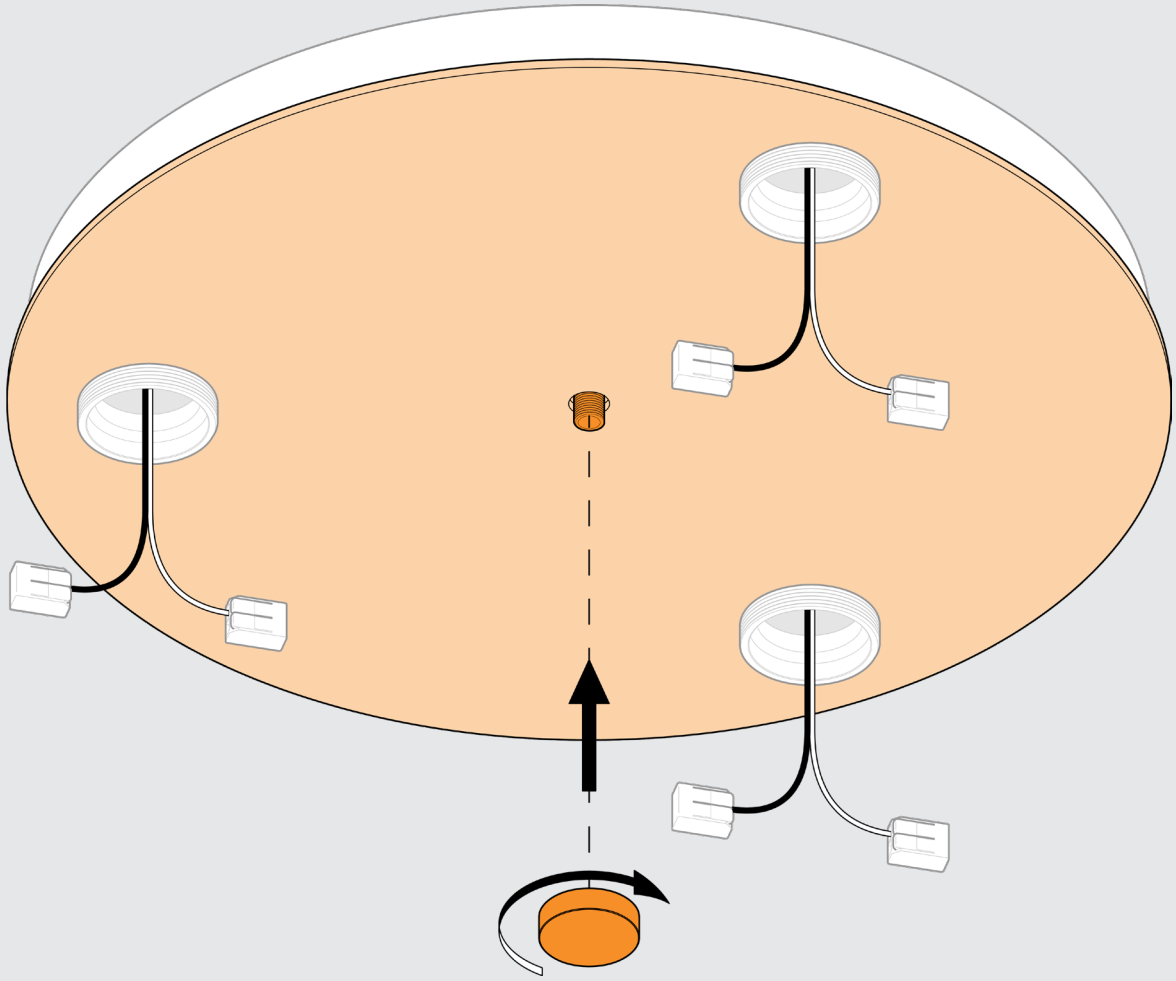

8

Travel the wires from the fixture through the hang rod. Then, screw the hang rod onto the nipple on the fixture swivel to secure the hang rod into place.

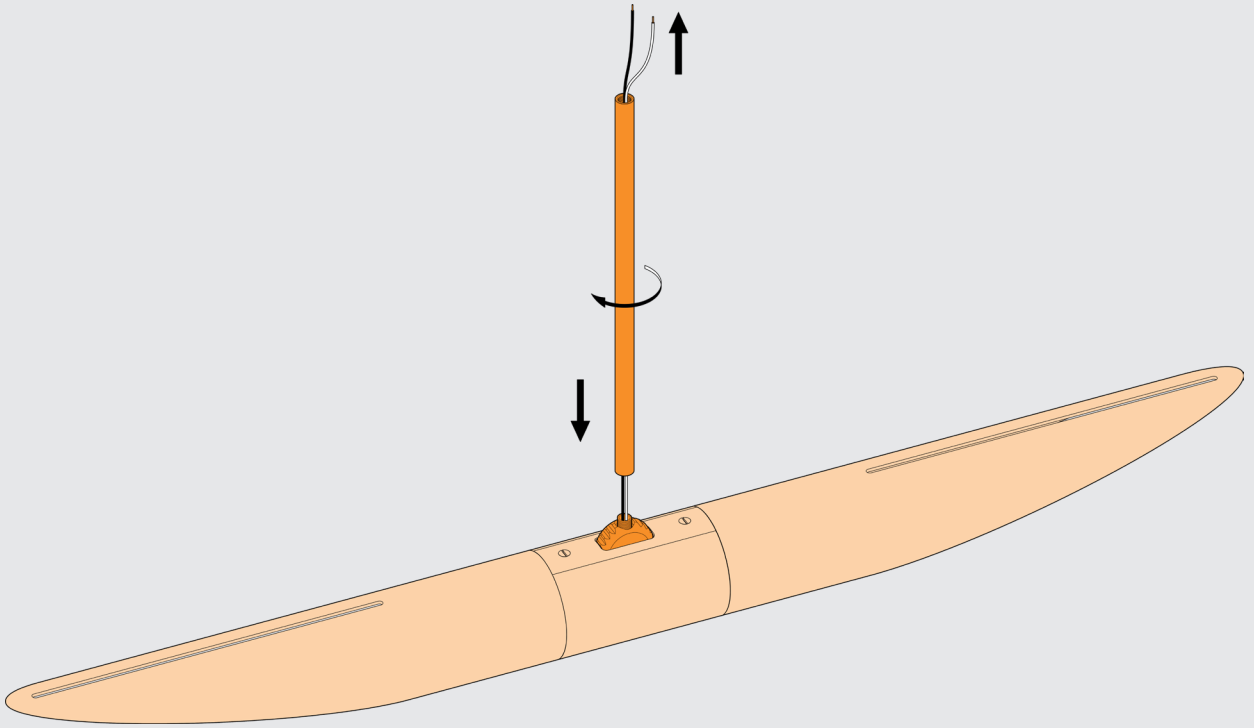

9

Travel the wires from the fixture through the next hang rod. Then, screw the hang rod onto the first hang rod.
NOTE: Skip this step if the fixture only has one hang rod.

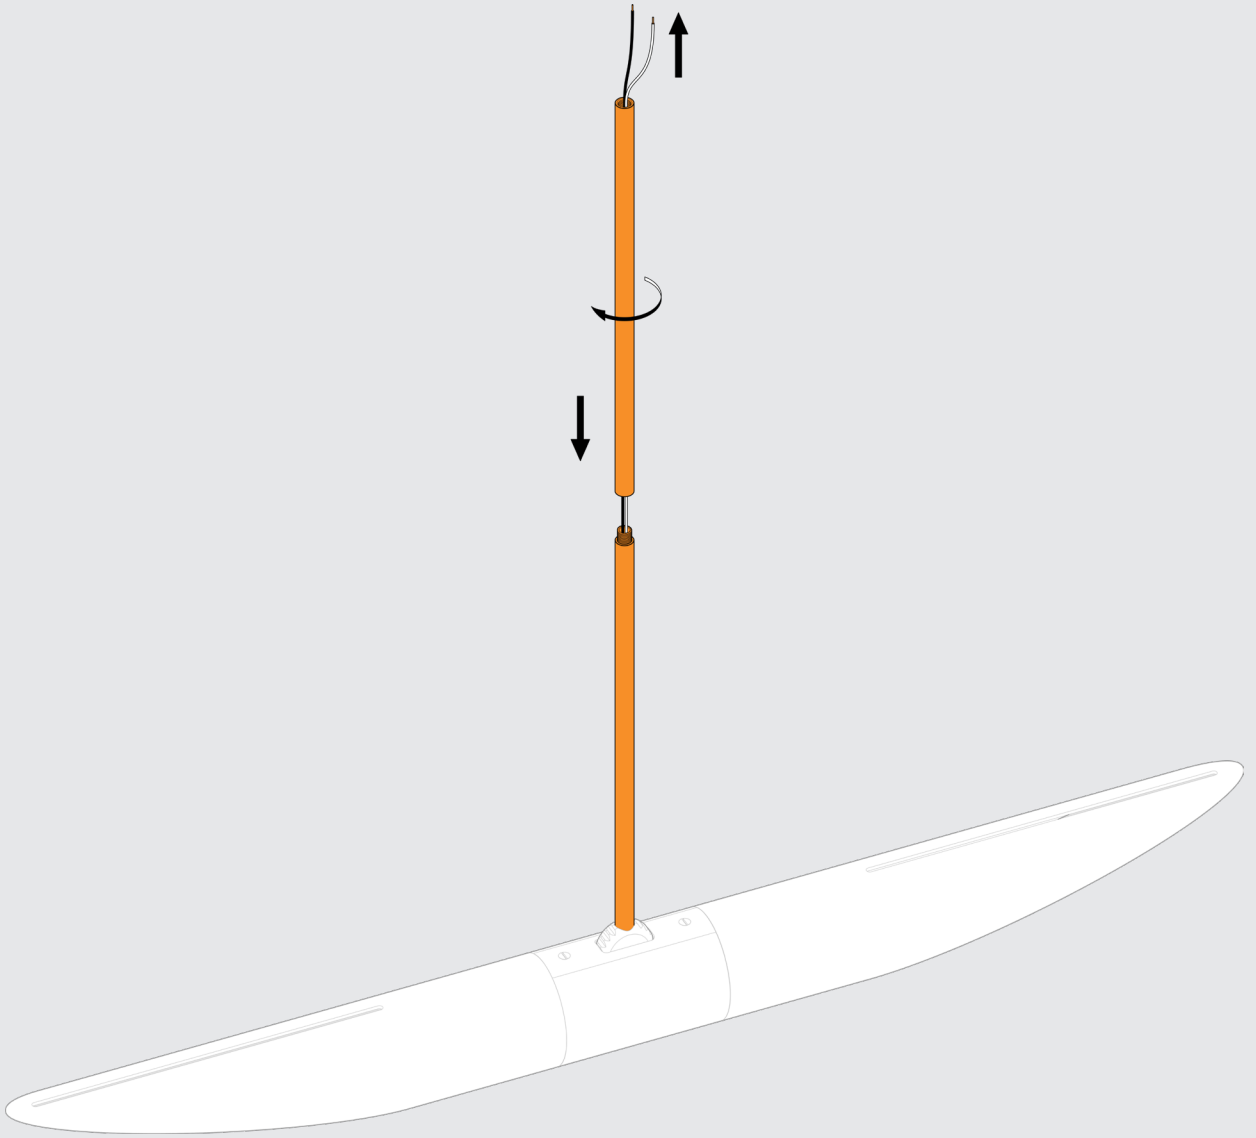

10

Carry the lock ring ring down the hang rod. Then, travel the wires from the fixture through the ball joint and screw the ball joint onto the hang rod.

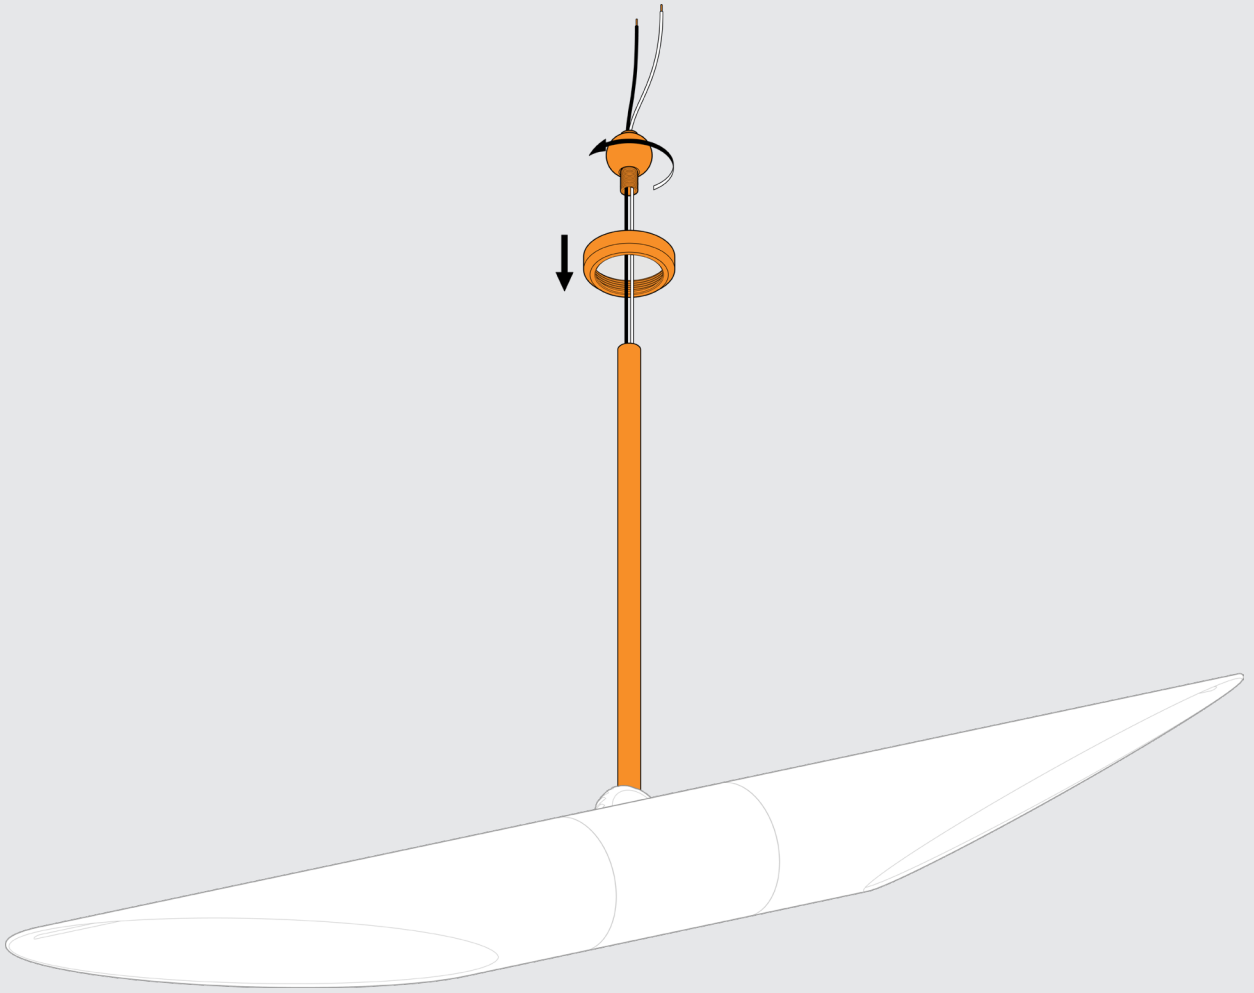

11

Connect the wires from the fixtures to the wires from the wago connectors. Insert the wires into each adapter hole of the fixture canopy. Then, carry the fixtures up to the adapters and screw the lock rings onto the adapters to secure the fixtures into place.

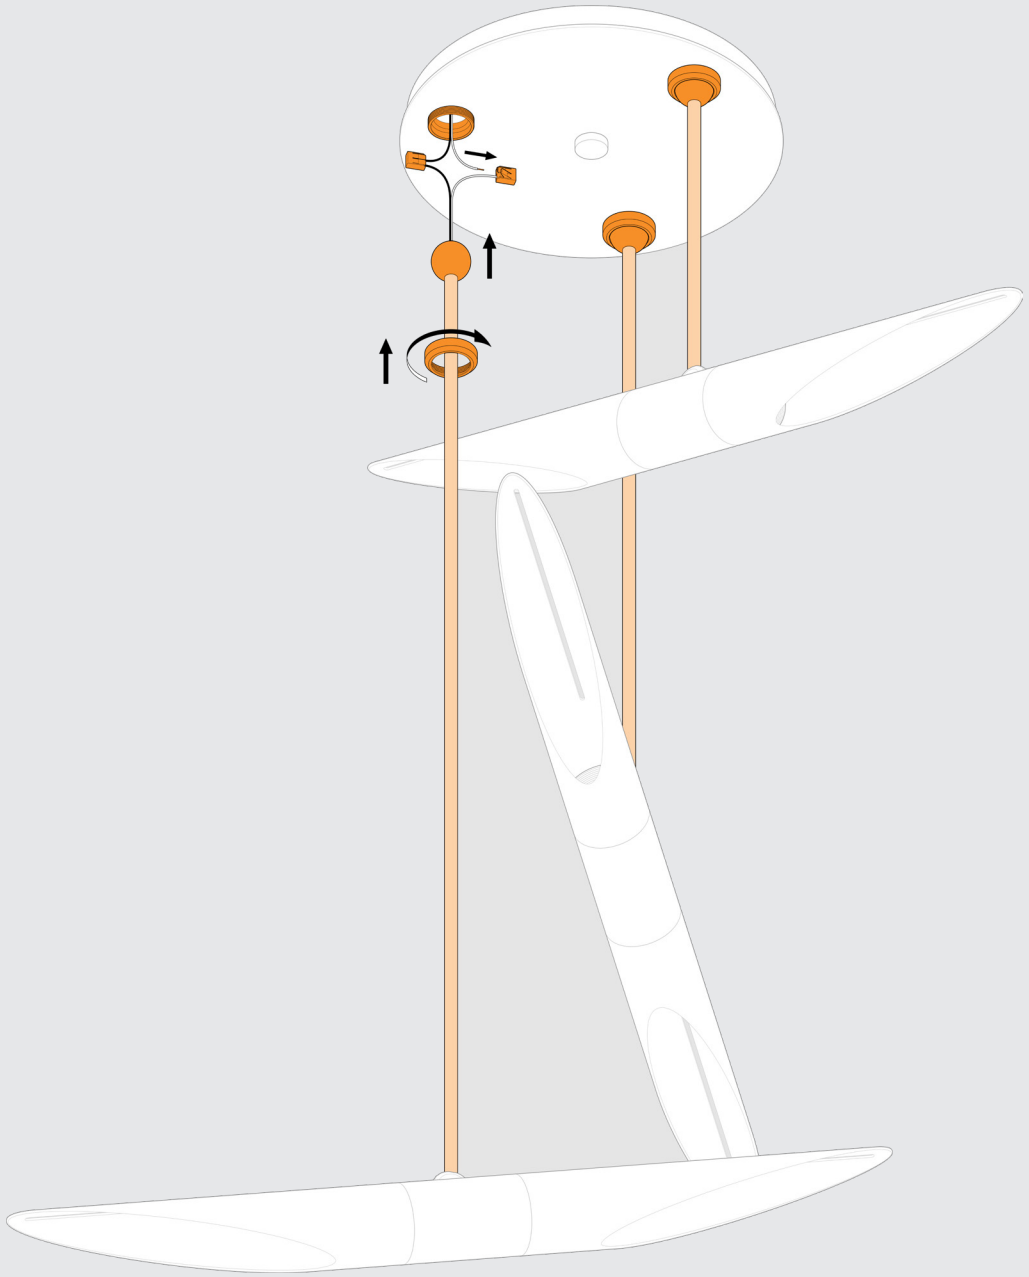

12

Screw the light bulbs
into the fixture sockets.

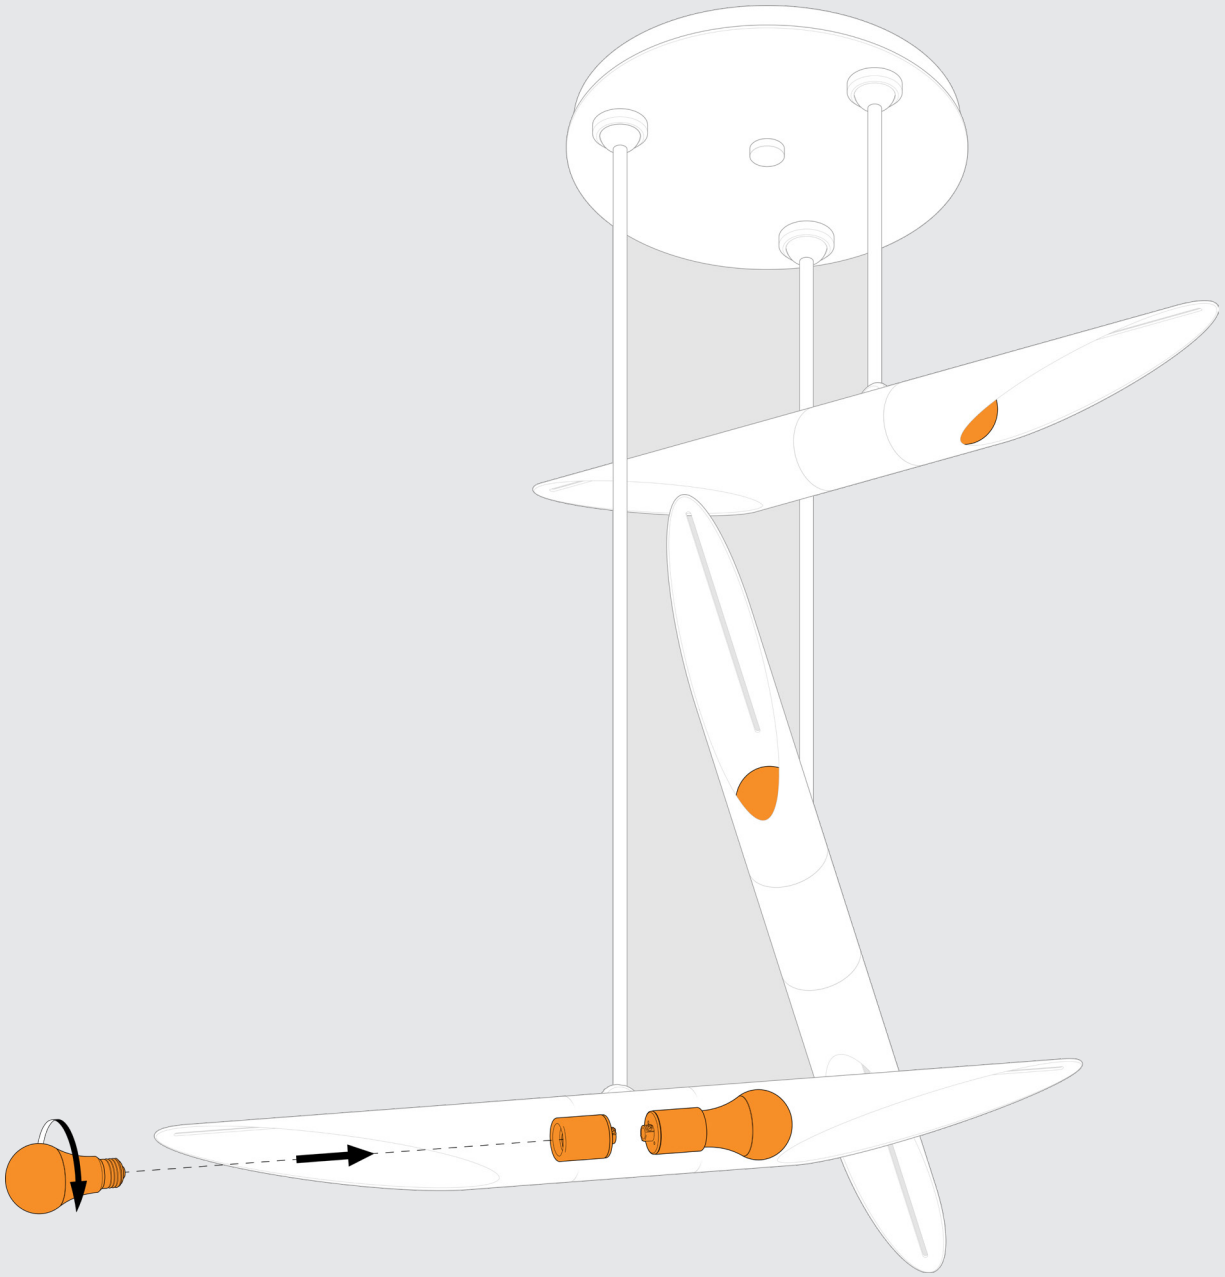

13
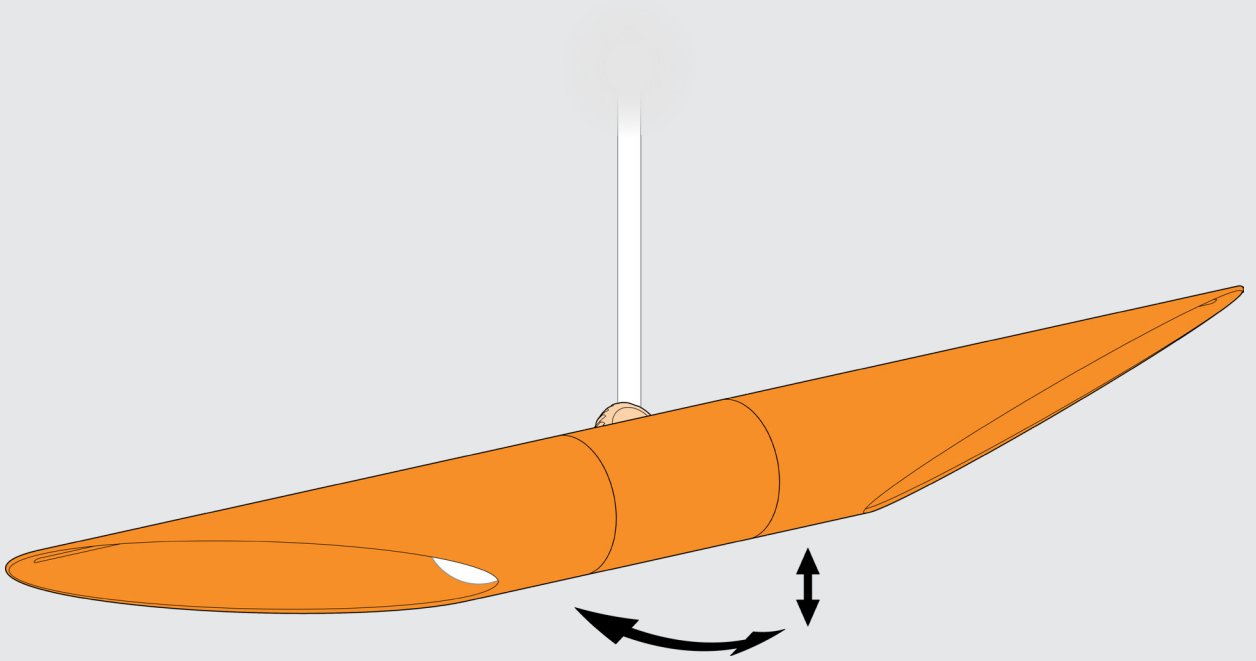
Gently lift the fixture enough to offset from the swivel and then adjust the fixture to the desired angle. Then, let go of the fixture to set the desired angle into place.